
AWESOMATIX A800RR


SETUP SHEET

NAME Joao Helio
COUNTRY Brazil
RACE National Indoor Championship
TRACK All Racing

DATE 25/10 TEMP. °C AIR / TRACK /
TRACK SURFACE ASPHALT ☐ CARPET ☑
TRACK LAYOUT TECHNICAL ☐ MIXED ☑ FAST ☐
TRACTION LOW ☐ MEDIUM ☑ HIGH ☑

FRONT

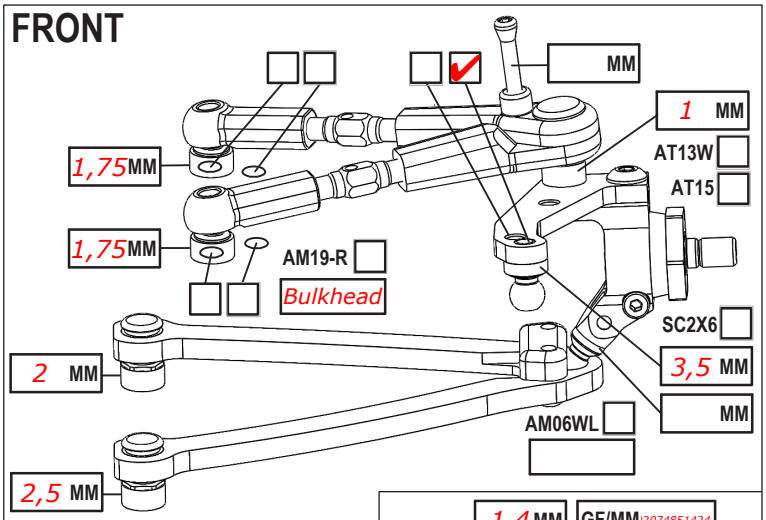

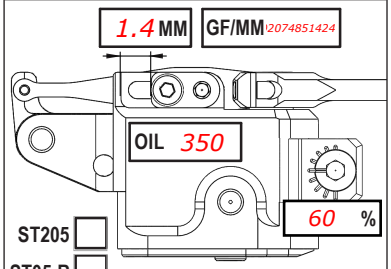



SHOCKS SETUP

CAMBER ANGLE / °	1
CASTER ANGLE / °	4
TOE ANGLE / °	2
RIDE HEIGHT / MM	5,2
DOWNSTOP / MM	5,2
ANTI-ROLL BAR Ø / MM	1.3
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION / MM	0
STEER. ARM AM14LS ☐	
2ND SPRING SPR-P2 ☐ P1 ☐	
WHEEL SPACER / MM	
DRIVE SPOOL ☑ DIFF ☐	
DRIVE POSITION DOWN ☑ UP ☐ +1 ☐	
DIFF OIL / DIFF SHIMS	

DAMPER D4 ☑	
ROTOR 2 HOLES ☑	
SPRING STD ☐ S ☑	
SRS/RHS ARR. I ☑ II ☐	
PSS SETUP 30% ☑ 25% ☐ 15% ☐	
DAMPING LINEAR ☐ P1 ☐ P2 ☑	
DAMPER SPACER / MM	
C45 YES ☑ NO ☐	

REAR

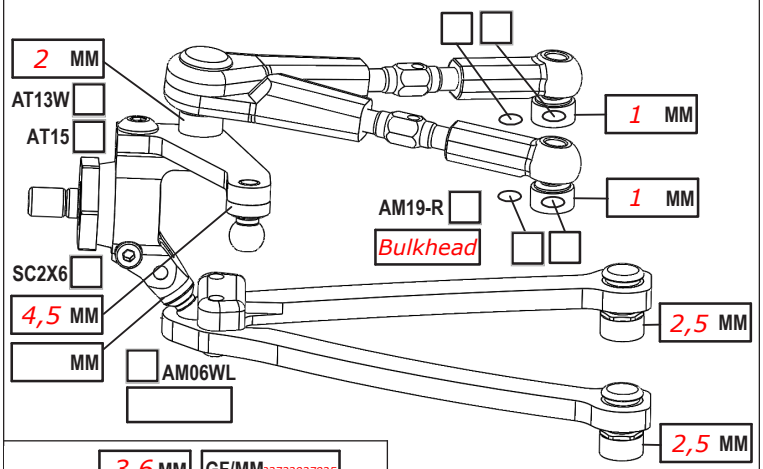

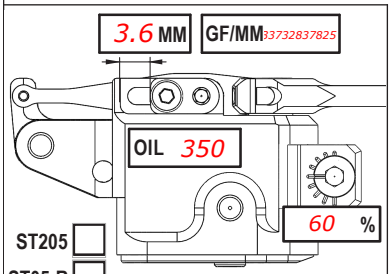


SHOCKS SETUP

CAMBER ANGLE / °	1
CASTER ANGLE / °	4
TOE ANGLE / °	2
RIDE HEIGHT / MM	5,4
DOWNSTOP / MM	4,6
ANTI-ROLL BAR Ø / MM	1.3
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION / MM	0
STEER. ARM AM23-1 ☐	
2ND SPRING SPR-P2 ☐ P1 ☐	
WHEEL SPACER / MM	0
DRIVE DIFF ☐	
DRIVE POSITION DOWN ☑ UP ☐ +1 ☐	
DIFF OIL 7K / DIFF SHIMS	

DAMPER D4 ☑	
ROTOR 2 HOLES ☑	
SPRING STD ☐ S ☑	
SRS/RHS ARR. I ☑ II ☐	
PSS SETUP 30% ☐ 25% ☐ 15% ☐	
DAMPING LINEAR ☐ P1 ☐ P2 ☑	
DAMPER SPACER / MM	
C45 YES ☑ NO ☐	

CHASSIS FLEX AND WEIGHT SETTINGS

BW22-R ☐ ABH ☐ BW52-R ☐

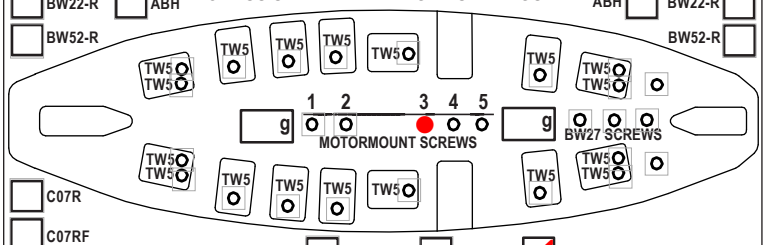


ABH ☐ BW22-R ☐ BW52-R ☐

C07R ☐ C07RF ☐

LOWER DECK C01B-RAF ☐ C01B-RC ☐ C01RS ☑ OTHER

BUMPER TOP PLATE CUT ☐ FRONT BUMPER P15L ☐ OTHER


C26 ☐



C26 ☐


FRONT TOP DECK C127 ☑ C127S ☐ OTHER
REAR TOP DECK C127 ☑ C127S ☐ OTHER
SINGLE TOP DECK C27MMX ☐ OTHER
BELT TENSIONER AM279 ☐ OTHER

BODY POSITION




BOTTOM WINDOW LINE TO BODY POST DISTANCE

FRONT BODY POST
ORING YES ☑ NO ☐
HOLE # 4

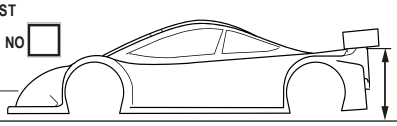

WINGLET YES ☐ NO ☐
REAR HRB SETTING / MM
SURFACE TO WING MOUNT DISTANCE / MM

TIRES	Volante V28
INSERTS	
SIDE WALLS GLUE Ø / MM F R	
ADDITIVE	
TOTAL WEIGHT	



TIME MIN. F R
WEIGHT DISTRIBUTION % F R

NOTES:

MOTOR LATERAL SHIFT / MM	2mm	SERVO	Max FWD
MOTOR	HW Justock	SERVOHORN / HEIGHT	16
SPUR 102 PINION 45 RATIO 666666667		ACKERMANN POSITION	FWD
BODY	Avalon Vortex	STEER TRAVEL IN / OUT	27
WING	Wolverine	BATTERY	R1 4000
ESC	HW Justock	RECEIVER	Sanwa
ESC SETTING		RADIO	Sanwa
BEST LAPTIME	11.523	QUALIF./FINAL POSITION	1 / 1

COMMENTS:

Sidewall Glue ~61mm
3D body support 61mm + 8mm under P64