



DATE		TEMP. °C	AIR / TRACK	/
TRACK SURFACE			ASPHALT ☐	CARPET ☐
TRACK LAYOUT	TECHNICAL ☐		MIXED ☐	FAST ☐
TRACTION	LOW ☐		MEDIUM ☐	HIGH ☐

REAR

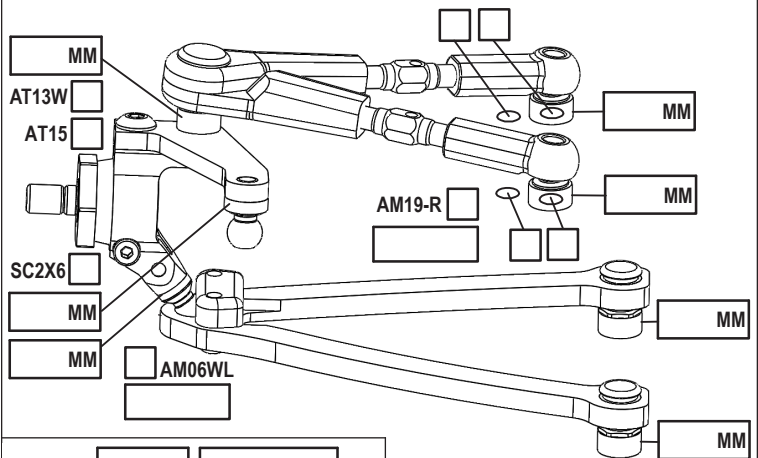



CAMBER ANGLE / ° _____

CASTER ANGLE / ° _____

TOE ANGLE / ° _____

RIDE HEIGHT / MM _____

DOWNSTOP / MM _____

UPSTOP / MM _____

ANTI-ROLL BAR Ø / MM _____

ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐

LOWER ARM EXTENSION / MM _____

STEER. ARM AM23-1 ☐

2ND SPRING SPR-P2 ☐ P1 ☐

WHEEL SPACER / MM _____

DRIVE DIFF ☐

DRIVE POSITION DOWN ☐ UP ☐ +1 ☐

DIFF OIL _____ DIFF SHIMS _____

ST205 ☐

ST05-R ☐

SHOCKS SETUP

DAMPER D4 ☐

ROTOR 2 HOLES ☐

SPRING STD ☐ S ☐


SRS/RHS ARR. I ☐ II ☐

PSS SETUP 30% ☐ 25% ☐ 15% ☐

DAMPING LINEAR ☐ P1 ☐ P2 ☐

DAMPER SPACER / MM _____

C45 YES ☐ NO ☐

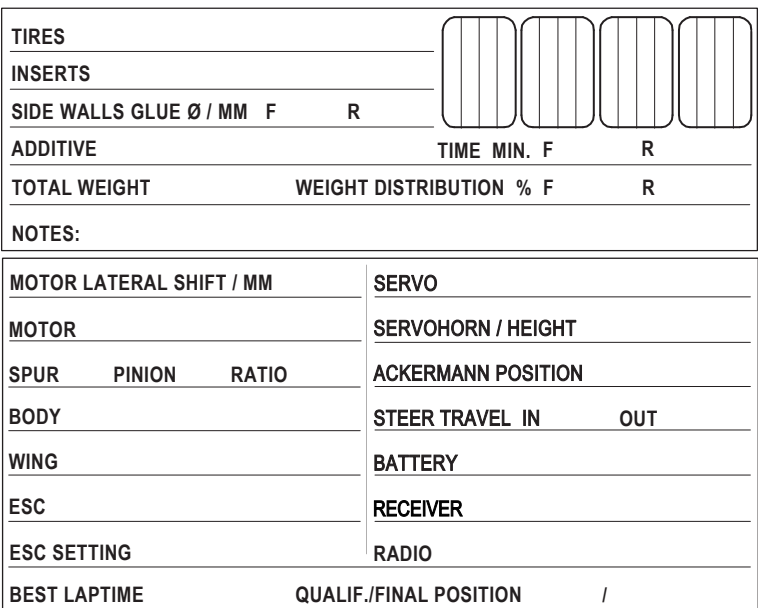

**SURFACE TO WING
MOUNT DISTANCE / MM**

COMMENTS: