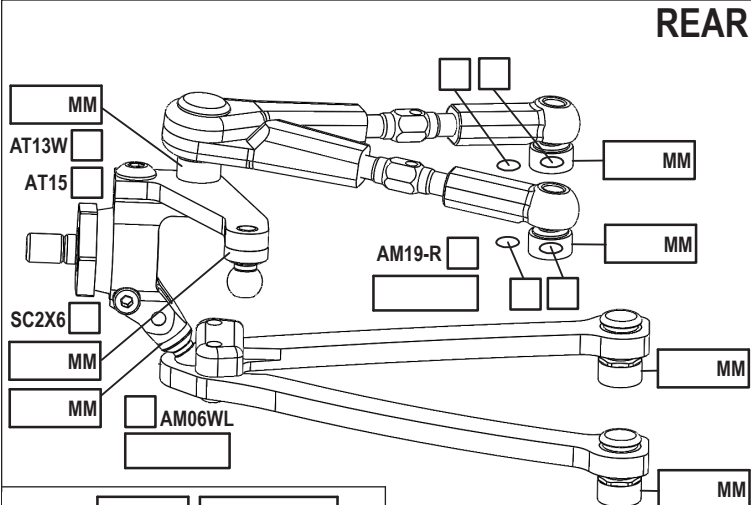


DATE		TEMP. °C	AIR / TRACK	/
TRACK SURFACE			ASPHALT ☐	CARPET ☐
TRACK LAYOUT	TECHNICAL ☐		MIXED ☐	FAST ☐
TRACTION	LOW ☐		MEDIUM ☐	HIGH ☐

REAR






Diagram of a shock absorber assembly with adjustment points labeled MM, GF/MM, OIL, and a percentage dial.

ST205 ☐

ST05-R ☐

SHOCKS SETUP

DAMPER D4 ☐

ROTOR 2 HOLES ☐

SPRING STD ☐ S ☐

SRS/RHS ARR. I ☐ II ☐

PSS SETUP 30% ☐ 25% ☐ 15% ☐

DAMPING LINEAR ☐ P1 ☐ P2 ☐

DAMPER SPACER / MM

C45 YES ☐ NO ☐




Diagram of a shock absorber assembly. Labels include: MM (top left), GF/MM (top right), OIL (middle left), and a percentage adjustment knob (middle right) with a label %.

ST205 ☐

ST05-R ☐

SHOCKS SETUP

DAMPER D4 ☐

ROTOR 2 HOLES ☐

SPRING STD ☐ S ☐

SRS/RHS ARR. I ☐ II ☐



PSS SETUP 30% ☐ 25% ☐ 15% ☐

DAMPING LINEAR ☐ P1 ☐ P2 ☐


DAMPER SPACER / MM

C45 YES ☐ NO ☐

CAMBER ANGLE / °	
CASTER ANGLE / °	
TOE ANGLE / °	
RIDE HEIGHT / MM	
DOWNSTOP / MM	
UPSTOP / MM	
ANTI-ROLL BAR Ø / MM	
ARB STIFFENER 1/4	1/2 ☐ 3/4 ☐ 1 ☐
LOWER ARM EXTENSION / MM	
STEER. ARM AM23-1 ☐	
2ND SPRING SPR-P2	☐ P1 ☐
WHEEL SPACER / MM	
DRIVE DIFF ☐	
DRIVE POSITION DOWN	☐ UP ☐ +1 ☐
DIFF OIL	DIFF SHIMS

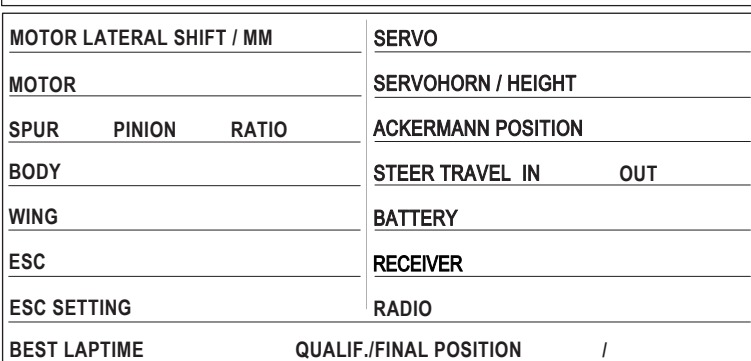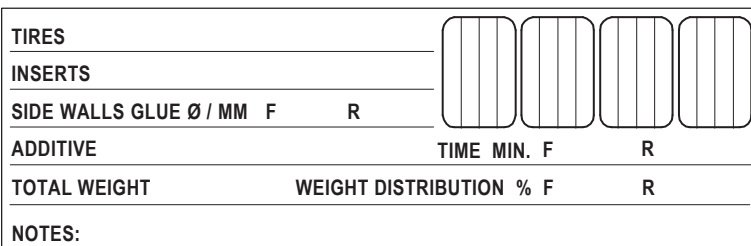

HOLE

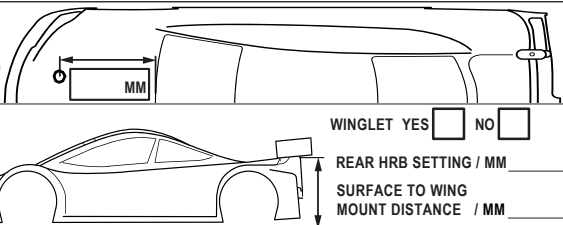

COMMENTS: