

TC10/3

1/10 EP TOURING CAR CHASSIS

Sheet Ver.1.2

DRIVER:

DATE:

RACE:

TRACK:

PLACE: ☐ Indoor ☐ Outdoor ☐ Asphalt ☐ Carpet / ☐ Flat ☐ Bump

TRACTION: ☐ High ☐ Medium ☐ Low TEMP AIR: °C TEMP TRACK: °C

TRACK LAYOUT: ☐ Technical ☐ Mixed ☐ High speed

QF POSITION:

FINAL POSITION:

BEST LAPTIME:

FRONT

Damper Stay


SCREW: ☐ Alu ☐ Ti ☐ SPS(Steel)
mm
SHIM: mm

Bulkhead Stiffener

Graphite ☐ NONE ☐ 1mm ☐ 2mm

Ride Height : mm

Droop :



Toe Angle : °

Camber Angle : °

Anti Roll Bar : ☐ 1.2 ☐ 1.3

Front Suspension

ALU Body Stopper



☐ C-clip ☐ Oring

FF: SUS

FR: SUS

Lower arm Alu plate:
☐ Upper ☐ Lower

REAR

Damper Stay

☐ Std ☐ Wide
SCREW: ☐ Alu ☐ Ti ☐ SPS(Steel)
mm
SHIM: mm

Ride Height : mm

Droop :



Toe Angle : °

Camber Angle : °

Anti Roll Bar : ☐ 1.2 ☐ 1.3

Gear Diff Oil

AXON cst g

Rear Suspension


☐ C-clip ☐ Oring

RF: SUS


RR: SUS

Lower arm Alu plate:
☐ Upper ☐ Lower


Bell Crank




Wheel Hubs ☐ 3.5 ☐ 4.0



Caster Block



Servo Horn Ball Position



SHOCK ABSORBER

Spring:


Oil :

Piston : ☐ 3H ☐ 4H


Hole : mm

Bladder : ☐ V1 ☐ V2


Shock cap Hole : mm




Motor Mount



Wheel Hubs ☐ 3.5 ☐ 4.0



Caster Block



SHOCK ABSORBER

Spring:


Oil :

Piston : ☐ 3H ☐ 4H

Hole : mm

Bladder : ☐ V1 ☐ V2

Shock cap Hole : mm



Rear Body Mount Stay



Rear Bulkhead Stiffener



Battery Mount



<<Balance Weight Setting>>

FRONT ROLL POST




☐ USE ☐ NONE

REAR T-BRACE



☐ USE ☐ NONE

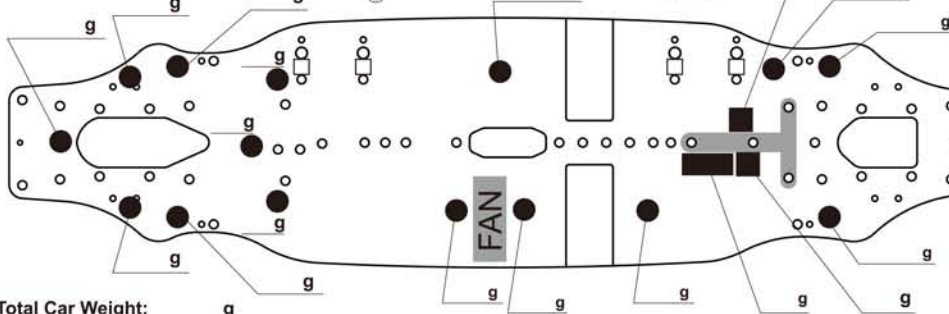

Total Car Weight: g

Main Chassis: ☐ Carbon 2.25mm ☐ Alu 2.0mm

Top Deck: ☐ Carbon 2.0mm ☐ Carbon 2.25mm

Motor:

Spur Gear: T Pinion Gear: T

Battery:

ESC:

Body:

Wing:

FRONT

REAR

Tire:

Tire:

Insert:

Insert:

Wheel:

Wheel:

Additive:

Additive:

Notes:

Notes:

Notes :

Screw setting <<Button Head>>

Top deck : 9pcs mm ☐ Alu ☐ Ti ☐ Steel

Upper bulkhead : FF 2pcs: mm ☐ Alu ☐ Ti ☐ Steel

Upper bulkhead : FR 2pcs: mm ☐ Alu ☐ Ti ☐ Steel

Upper bulkhead : RF 2pcs: mm ☐ Alu ☐ Ti ☐ Steel

Upper bulkhead : RR 2pcs: mm ☐ Alu ☐ Ti ☐ Steel

Front Damper stay 4pcs: mm ☐ Alu ☐ Ti ☐ Steel

Rear Damper stay 4pcs: mm ☐ Alu ☐ Ti ☐ Steel

Screw setting <<Flat Head>>

Lower bulkhead 8pcs: mm ☐ Alu ☐ Ti ☐ Steel

Sus-balls ALL: mm ☐ Alu ☐ Ti ☐ Steel

Bell crank post: mm ☐ Alu ☐ Ti ☐ Steel

Servo mount: mm ☐ Alu ☐ Ti ☐ Steel

Motor mount: mm ☐ Alu ☐ Ti ☐ Steel