


C804 SL Default Set-Up Sheet

Capricorn RC

Front




Upper Arm Position

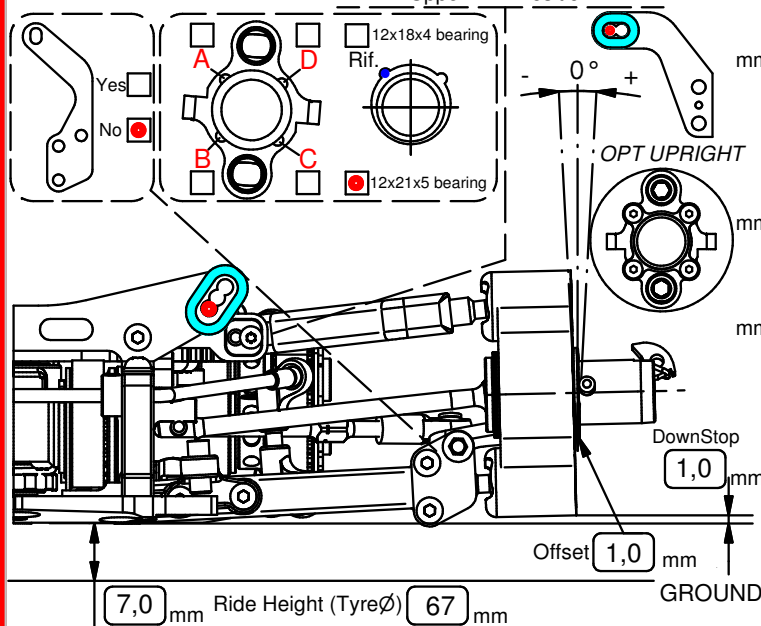


CAMBER	TOE / SIDE	WIDHT
LEFT -1,5°	-1,5°	252,0 mm
RIGHT -1,5°		

WHEELBASE SHIM Rear Front

ACKERMANN INSERTS	S.SAVER ARM
8,5 9 10 11 12 mm	MONOLITHIC



Front
Rear



Caster Angle

Upper Arm Spacers
1,0 mm

Made in Italy



FRONT

REAR

LEFT	RIGHT	TYRES	LEFT	RIGHT
32	32	BRAND	35	35
67	67	SHORE	74	74
		DIAMETER		

SHOCK ABSORBERS

STD	S.SHORT	TYPE	STD Long
600		OIL	600
Blue		SPRING	Red
3	1,1	PISTON / Ø	3
			1,1

ANTI-ROLL BARS

Wire	TYPE	Wire
2,3	Ø	2,6
	F1 DEPTH	

1 ST SPUR GEAR 2 ND

60	61	62	56	57	58
----	----	----	----	----	----

1 ST PINION 2 ND

18	19	23	24
----	----	----	----

DRIVE TRAIN

UPRIGHT

FLEX

MIDDLE AXLE PULLEY	Diff.	STD	OPT	Rear	Front
29	30				Stiff.


POWER PACK

BRAND/TYPE	MANIFOLD
PLUG 7	FUEL/NITRO% 16
CLUTCH BELL GAP 0,5	END PLAY 0,2
CLUTCH SPRING HARD	SPRING PRELOAD 0,6


SET-UP SHEET

NAME	
DATE	
TEMP	
TRACK	
TRACTION	
RESULT	BEST LAP

Arm Position

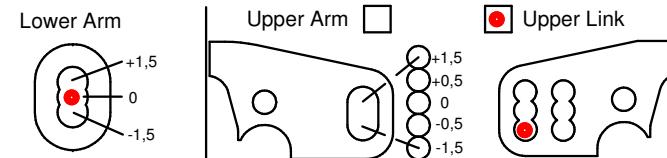

Rear

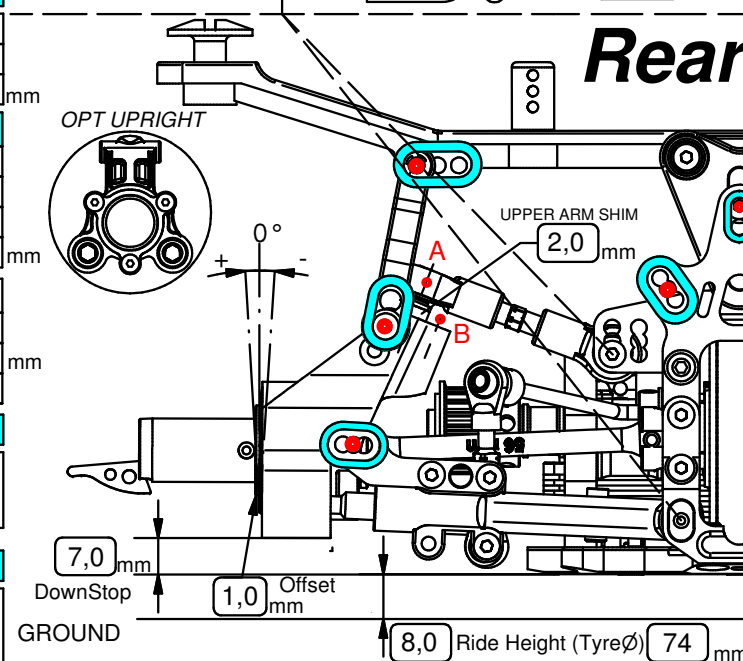

CAMBER	TOE / SIDE	WIDHT
LEFT -3,5°	2,5°	262,0 mm
RIGHT -3,5°		

WING POSITION 8,0 mm

ARM POSITION	BODY TYPE	BODY POSITION
A B		13,0 mm

BODY COLUMNS POSITION

Forward Backwards

Side Brass weight strip	Battery Plate	Adj Weight
R 8,5 gr F	Plastic Type	gr
screws --- position		n° Posit.

Additional notes