



Driver: _____
Date: _____
Event: _____
Track: _____
Result: _____

Track Conditions

☐ CRC Black ☐ CRC Grey ☐ ETS
☐ _____
☐ Low ☐ Medium ☐ High
☐ Small ☐ Medium ☐ Large
☐ Smooth ☐ Both ☐ Bumpy
Temp: _____ Humidity: _____

Shock

Oil: _____
Spring: _____
Length: _____
Preload: _____

Damper Tube


☐ 5k ☐ 10k ☐ 15k ☐ 20k
☐ _____

Front Tires

Compound: _____
Diameter: _____
Additive: _____
Soak time: _____

Rear Tires

Compound: _____
Diameter: _____
Additive: _____
Soak time: _____

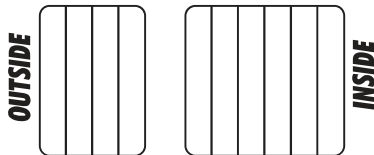

Electronics


Motor: _____
Timing: _____
Battery: _____
ESC: _____
Ratio: _____

Aerodynamics

Body: _____
Position: _____
Car weight: _____

Suspended Pod: _____
(Shock lenght)


Race Ready Pod: _____
(Shock Preload)

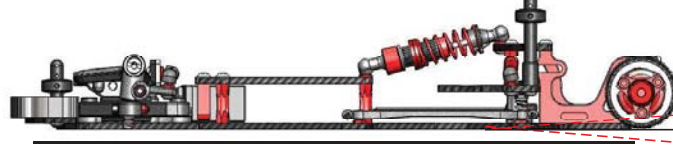

Rear Pod

+ Sag (up)
Chassis Plane
- Droop (down)

Ride Height - Front: _____ Middle: _____ Rear: _____



Front Spring
☐ 45 ☐ 50 ☐ 55 ☐ 60
☐ _____

Dynamic Caster Block

☐ 0° ☐ 5° ☐ 10°




Caster
☐ 3 shims front
☐ 2 shims front
☐ 1 shim front
☐ All shims back

Camber: _____




Roll Center Spacer
☐ 0mm
☐ 2mm
☐ 2.5mm

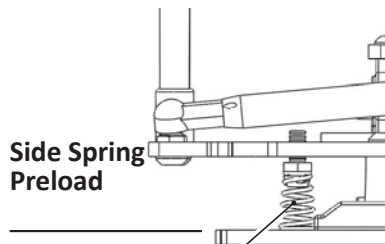

Side Spring
Preload


Side Spring
☐ 45 ☐ 50 ☐ 55 ☐ 60
☐ _____

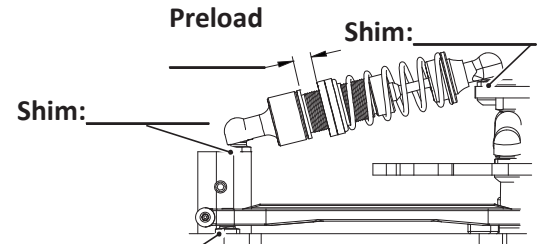

Rear Steer - Shim: _____

Battery Position

☐ Forward
☐ Rearward
☐ _____

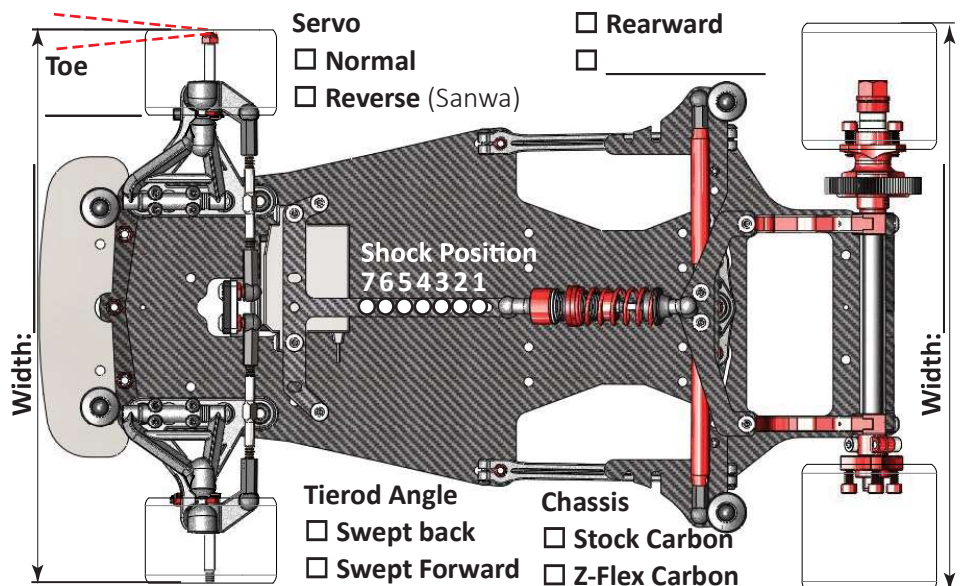

Servo
☐ Normal
☐ Reverse (Sanwa)

Tierod Angle
☐ Swept back
☐ Swept Forward
☐ Straight

Chassis
☐ Stock Carbon
☐ Z-Flex Carbon
☐ Aluminium

Front Brace: ☐ Yes ☐ No