

# CK25

# CALANDRA RACING CONCEPTS SETUP SHEET

Driver: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Event: \_\_\_\_\_  
 Track: \_\_\_\_\_  
 Result: \_\_\_\_\_

### Track Conditions

- CRC Black     CRC Grey     ETS  
 \_\_\_\_\_  
 Low             Medium        High  
 Small           Medium        Large  
 Smooth         Both            Bumpy  
 Temp: \_\_\_\_\_ Humidity: \_\_\_\_\_

### Shock

Oil: \_\_\_\_\_  
 Spring: \_\_\_\_\_  
 Length: \_\_\_\_\_  
 Preload: \_\_\_\_\_

### Damper Tube


- 5k    10k    15k    20k  
 \_\_\_\_\_

### Front Tires

Compound: \_\_\_\_\_  
 Diameter: \_\_\_\_\_  
 Additive: \_\_\_\_\_  
 Soak time: \_\_\_\_\_

### Rear Tires

Compound: \_\_\_\_\_  
 Diameter: \_\_\_\_\_  
 Additive: \_\_\_\_\_  
 Soak time: \_\_\_\_\_

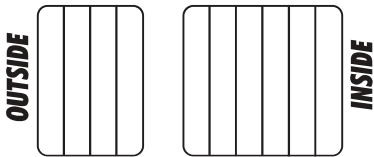

### Electronics


Motor: \_\_\_\_\_  
 Timing: \_\_\_\_\_  
 Battery: \_\_\_\_\_  
 ESC: \_\_\_\_\_  
 Ratio: \_\_\_\_\_

### Aerodynamics

Body: \_\_\_\_\_  
 Position: \_\_\_\_\_  
 Car weight: \_\_\_\_\_

Suspended Pod: \_\_\_\_\_  
 (Shock length)


Race Ready Pod: \_\_\_\_\_  
 (Shock Preload)

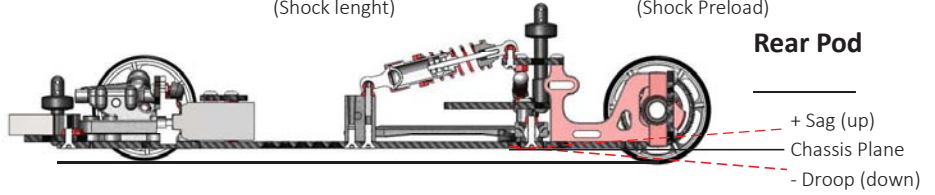

Rear Pod

+ Sag (up)  
 Chassis Plane  
 - Droop (down)

Ride Height - Front: \_\_\_\_\_ Middle: \_\_\_\_\_ Rear: \_\_\_\_\_



Kingpin Lube

Kingpin Length

Front Spring  
 45    50    55    60  
 \_\_\_\_\_

Dynamic Caster Block

0°    5°    10°




Caster  
 3 shims front  
 2 shims front  
 1 shim front  
 All shims back

Camber: \_\_\_\_\_




Roll Center Spacer  
 0mm  
 2mm  
 2.5mm

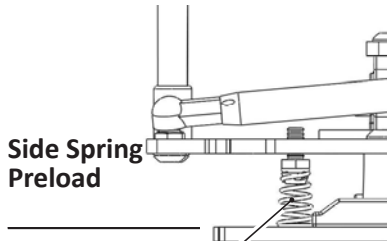

Side Spring Preload

Side Spring  
 45    50    55    60  
 \_\_\_\_\_

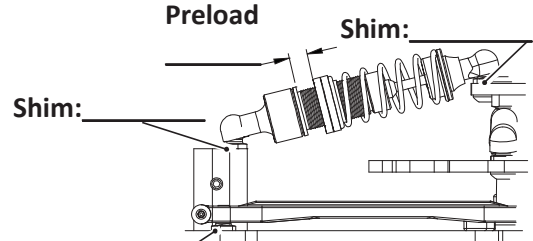

Preload


Shim: \_\_\_\_\_

Shim: \_\_\_\_\_

Rear Steer - Shim: \_\_\_\_\_

Battery Position

- Forward  
 Rearward  
 \_\_\_\_\_

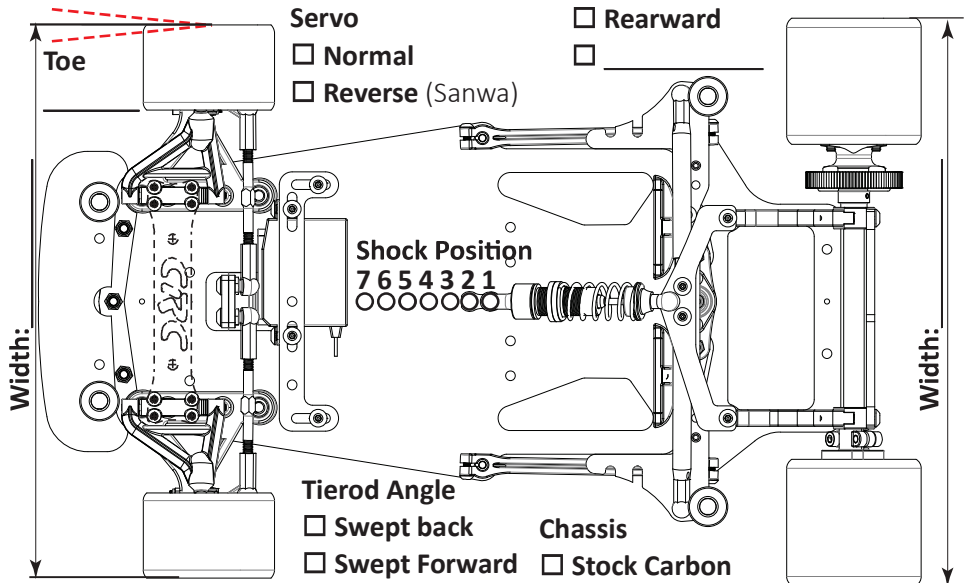

Toe

Servo

- Normal  
 Reverse (Sanwa)

Shock Position

7 6 5 4 3 2 1

Tierod Angle

- Swept back  
 Swept Forward  
 Straight

Chassis

- Stock Carbon  
 Z-Flex Carbon

Front Brace:  Yes    No