

IF14

SET-UP SHEET

NAME	Akio Sobue
DATE	12-14 May 2017
TRACK	Riccione, Italy
EVENT	ETS Round4

QUAL. POSITION	FINAL POSITION	BEST LAP	RACE LENGTH
		sec	min

TEMPERATURE AIR	TEMPERATURE TRACK

TRACK	
TRACK SURFACE	<input checked="" type="checkbox"/> ASPHALT <input type="checkbox"/> CARPET
TRACK LAYOUT	<input type="checkbox"/> TECHNICAL <input checked="" type="checkbox"/> MIXED <input type="checkbox"/> FAST
TRACTION	<input type="checkbox"/> LOW <input checked="" type="checkbox"/> MEDIUM <input type="checkbox"/> HIGH

FRONT	TRANSMISSION	REAR
<input checked="" type="checkbox"/> SOLID AXLE		
<input type="checkbox"/> ONE WAY		
<input type="checkbox"/> GEAR DIFFERENTIAL	<input checked="" type="checkbox"/> GEAR DIFFERENTIAL	
OIL	OIL	Axon, 10000/1.4g
PINION GEAR	SPUR GEAR	FINAL DRIVE RATIO
29	112	7.338





FRONT	SHOCKS	REAR
Axon (Xray)	SHOCK TYPE	Axon (Xray)
Axon HLS2.8	SPRINGS	Axon HLS2.8
Axon 35	OIL	Axon 35
0	REBOUND (%)	0
<input checked="" type="checkbox"/> 3 HOLES <input checked="" type="checkbox"/> 1.1mm	PISTONS	<input checked="" type="checkbox"/> 3 HOLES <input checked="" type="checkbox"/> 1.1mm
<input type="checkbox"/> 4 HOLES <input type="checkbox"/> 1.2mm		<input type="checkbox"/> 4 HOLES <input type="checkbox"/> 1.2mm
9.0 mm	LENGTH	9.5 mm
O-ring, Axon M	OTHER	O-ring, Axon M
1.3 mm	ANTI-ROLL BAR	1.3 mm

FRONT	TIRES	REAR
Volante	TIRES	
Pink Volante	INSERTS	
Volante	WHEELS	
MR33 outdoor ETS	ADDITIVE	
	ADDITIVE TIMING	

SUSPENSION HOLDER			
FF	RF	FR	RR
HOLDER	HOLDER	HOLDER	HOLDER
<input type="checkbox"/> 0.0	<input type="checkbox"/> 0.0	<input type="checkbox"/> 0.0	<input type="checkbox"/> 0.0
<input type="checkbox"/> 4.5	<input type="checkbox"/> 4.5	<input type="checkbox"/> 4.5	<input type="checkbox"/> 4.5
<input checked="" type="checkbox"/> 6.0	<input checked="" type="checkbox"/> 6.0	<input checked="" type="checkbox"/> 6.0	<input checked="" type="checkbox"/> 6.0
ECCENTRIC BUSHINGS	ECCENTRIC BUSHINGS	ECCENTRIC BUSHINGS	ECCENTRIC BUSHINGS
<input type="checkbox"/> 0.5	<input type="checkbox"/> 0.5	<input type="checkbox"/> 0.5	<input type="checkbox"/> 0.5
<input checked="" type="checkbox"/> 1	<input checked="" type="checkbox"/> 1	<input checked="" type="checkbox"/> 1	<input checked="" type="checkbox"/> 1

OTHER

MOTOR	TIMING
ESC	BATTERIES
BODY	WING

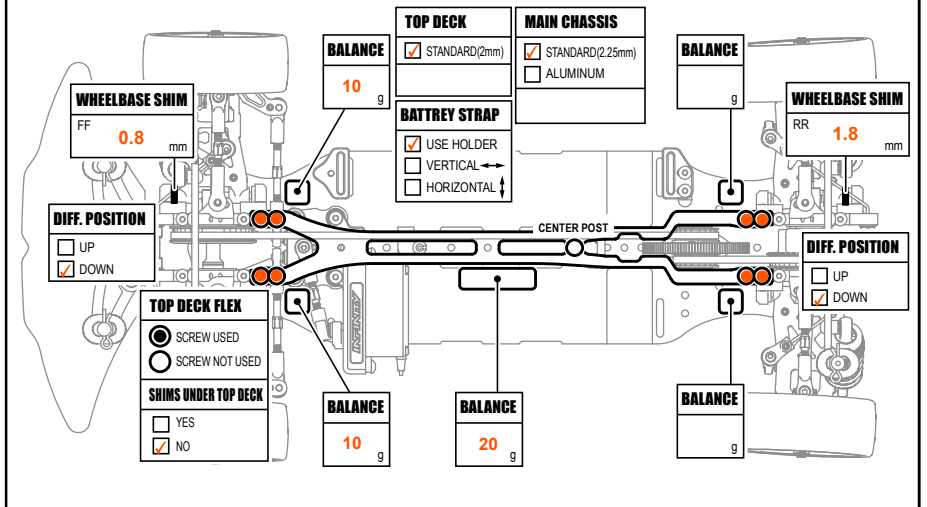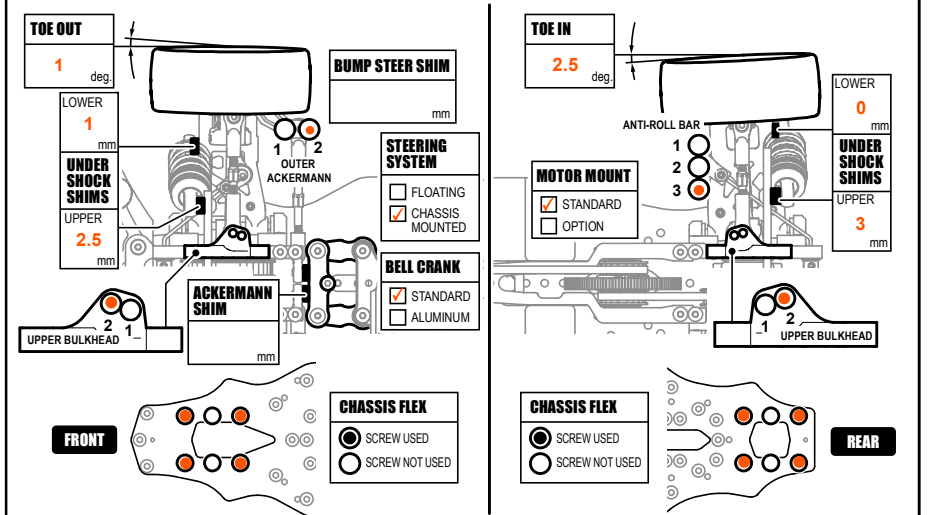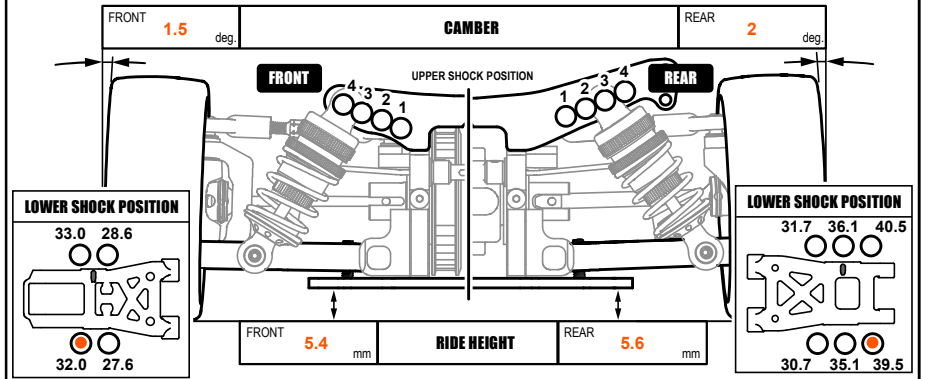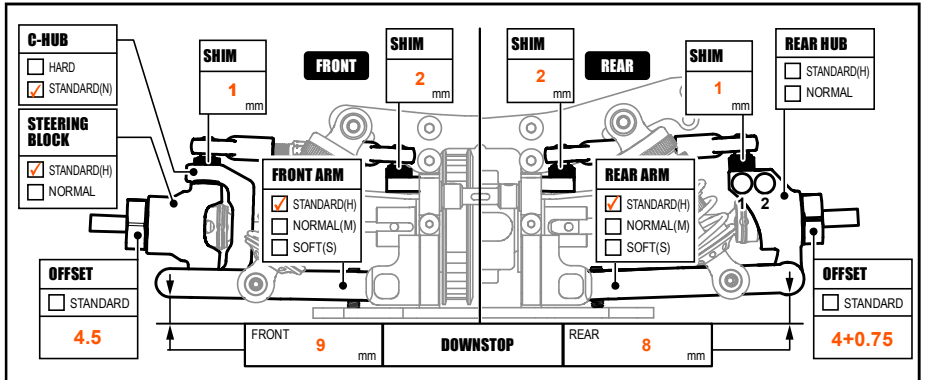

COMMENTS
 Use ARS system. Link high: Chassis side=6.0mm, Upright=2.5mm.
 Use XRAY Rear Hub.
 Motor Mount 1mm low.
 0.5mm spacere between Rear Suspension Holder and Lower bulkhead.