

NAME	
DATE	
TRACK	
EVENT	
TRACTION	
SURFACE	

PINION	TRANSMISSION	SPUR
☐ 15T ☐ 16T ☐ 17T	☐ 1ST ☐ 58T ☐ 59T	
☐ 20T ☐ 21T ☐ 22T	☐ 2ND ☐ 53T ☐ 54T	

SIDE PULLEY	
☐ 25T(STD)	☐ 26T(OPT)

FRONT	SHOCKS	REAR
☐ SHORT ☐ STD	☐ TYPE	☐ SHORT ☐ STD
	☐ SPRING	
#	☐ OIL	#
☐ STD ☐ OPTION	☐ O-RING	☐ STD ☐ OPTION
	☐ PISTON	

DIFF		
☐ UP	☐ DIFF	☐ UP
☐ STD	☐ ADJUSTABLE	☐ STD

ANTI-ROLL BAR	
mm	mm

RIDE HEIGHT	
mm	mm

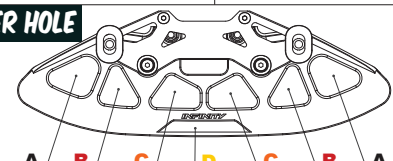
WIDTH	
mm	mm




TYRES		CONTROLLED
☐ LEFT	☐ RIGHT	☐
mm	mm	DIAMETER
mm	mm	mm

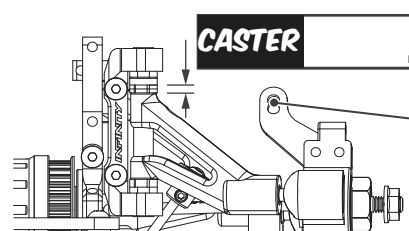



WHEEL PLATE	
☐ YES ☐ NO	☐ WHEEL PLATE ☐ YES ☐ NO

HEX HUB	U (UNIVERSAL)/D (DRIVE SHAFT)
☐ STD ☐ OPT	☐ 90° U(OPT) ☐ 90° U(STD) ☐ 0° D(OPT) ☐ 0° U(STD)

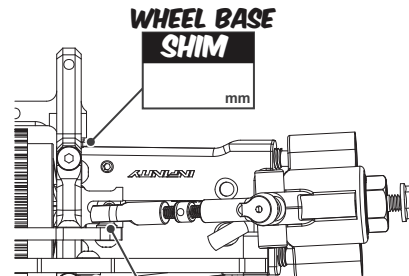



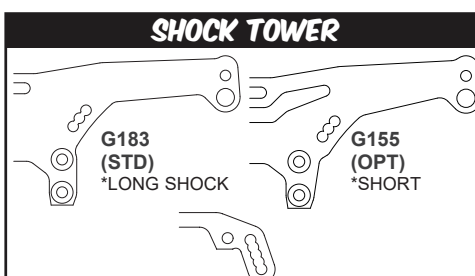




BODY	
TYPE	POSITION
	WING





	
STANDARD	CARBON
BUMPER HOLE	
	
A	B
C	D
C	B
A	

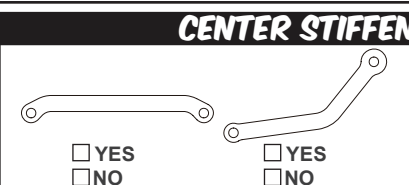
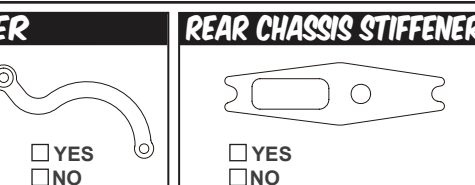
FRONT	CENTER	REAR
		
7 6 5 4 3 2 1	7 6 5 4 3 2 1	6 5 4 3 2 1

	CASTER mm
	KNUCKLE PLATE POSITION
	TOE OUT deg.
	UPPER SHIM mm
	UPPER POSITION
	CAMBER deg.
	DOWNSTOP mm

MATERIAL	
KNUCKLE	☐ STANDARD ☐ HARD
UPPER ARM	☐ STANDARD ☐ HARD
LOWER ARM	☐ STANDARD ☐ HARD

	WHEEL BASE SHIM mm
	TOE IN deg.
	SPACER mm
	SUS BLOCK POSITION
☐ STANDARD ☐ WIDE (G076/G077)	
	SUSPENSION COVER
☐ NO ☐ STANDARD ☐ HARD ☐ CARBON	
	SCREW POINT
	SHOCK TOWER
☐ G183 (STD) *LONG SHOCK ☐ G155 (OPT) *SHORT	
	UPPER POS ☐ IN ☐ OUT
	CAMBER deg.
	DOWNSTOP mm
	SUS ARM ☐ STANDARD ☐ HARD
	REAR HUB ☐ STANDARD ☐ HARD

	SERVO SAVER
☐ 9 ☐ 10 ☐ 11	POSITION
☐ STD ☐ AL	
	UPPER STIFFENER ☐ YES ☐ NO
	CENTER BULK ☐ STD ☐ AL
	WEIGHT
28g 20g 14g 9.5g	
1	
2	
3	
4	
5	
6	
7	
8	

	CENTER STIFFENER
☐ YES ☐ NO	
	REAR CHASSIS STIFFENER
☐ YES ☐ NO	