

F13-III SETUP SHEET

VER.2.0

NAME	
DATE	
TRACK	
EVENT	

PINION	TRANSMISSION	SPUR	SHAFT
☐ 18T ☐ 19T ☐ 20T ☐ 19T ☐ 60T ☐ 61T ☐ 62T ☐ 6mm	☐ 23T ☐ 24T ☐ 25T ☐ 2ND ☐ 56T ☐ 57T ☐ 58T ☐ 8mm		
PINION (STD ☐ / HARD ☐)			

FRONT SHOCKS		REAR
PLA ☐ / AL ☐	SPRING & RETAINER	PLA ☐ / AL ☐
#	OIL	#
☐ STD ☐ OPTION	O-RING	☐ STD ☐ OPTION
☐ STD ☐ OPTION	MEMBRANE	☐ STD ☐ OPTION
HOLE(S) (STD ☐ / SCREW ☐)		HOLE(S) (STD ☐ / SCREW ☐)
PISTONS		
SHAFT LENGTH		SHAFT LENGTH
mm		mm

FRONT	ANTI-ROLL BAR	REAR
	mm	mm

FRONT	RISE HEIGHT	REAR
	mm	mm

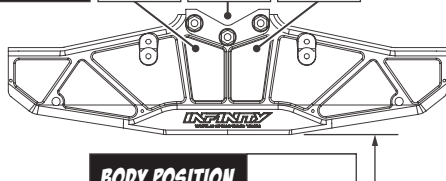
FRONT	WIDTH	REAR
	mm	mm

BRAND	TIRES	CONTROLLED
		☐


LEFT	FRONT	RIGHT	DIAMETER	LEFT	REAR	RIGHT
			mm			

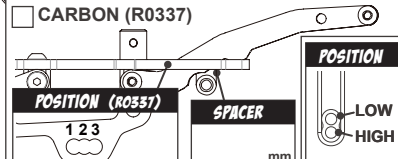
FRONT	WHEEL PLATE	REAR
☐ YES ☐ NO		☐ YES ☐ NO


BODY

BUMPER WEIGHT & BODY POSITION	
WEIGHT	g
	
BODY POSITION	mm

FRONT CARBON PLATE
☐ CARBON ☐ NO ☐ PLASTIC

REAR BODY MOUNT
☐ PLASTIC (R0373)

POSITION
1 2

CARBON (R0337)

POSITION (R0337)
1 2 3
SPACER
mm
LOW HIGH

LIGHT WEIGHT (R0349)

POSITION
1 2

SHOCK TOWER

R0081	R0336
R0081W	R0336W

LOWER ARM PLATE

R0355W	R0355N	R0353
☐ YES ☐ NO		

KNUCKLE BASE

SPACER	mm
☐ STANDARD (15.5)	☐ R0314B (13.5)

CASTER	mm
SPACER	mm
TOE ANGLE	deg.
SWING SHAFT	☐ 64 ☐ 62 ☐ 60 ☐ 60 (90deg.)

UPPER SUS BUSH

☐ SOFT ☐ HARD	☐ 000000
---	---------------------------------

UPPER SUS HOLDER

☐ STANDARD ☐ HARD ☐ ALUMINUM

SIDE SCREW	☐ YES ☐ NO
------------	--

UPRIGHT UPPER

☐ STANDARD ☐ -1 ☐ 0 ☐ +1
☐ HARD ☐ ALUMINUM

CENTERING (R0328) / OFFSET BUSHING (R0327)

☐ YES ☐ NO
--

UPRIGHT LOWER

☐ STANDARD ☐ HARD

SUS ARM UPPER

☐ STANDARD ☐ HARD

SUS ARM LOWER

☐ STANDARD ☐ HARD

LOWER ARM END

☐ SOFT ☐ HARD ☐ OLD ☐ NEW

LOWER SUS HOLDER

☐ STANDARD ☐ HARD ☐ ALUMINUM

LOWER SUS BUSH

☐ SOFT ☐ HARD ☐ IN ☐ OUT
--

ONE WAY

☐ STANDARD ☐ 8mm (R0333)
--

STOPPER

☐ YES ☐ NO
--

SPACER	mm
CAMBER	deg.
AXLE SPACER	mm
OFFSET SPACER	☐ YES ☐ NO
DOWN STOP	mm

CHASSIS STIFFENER

☐ NO ☐ SCREW ☐ CARBON (R0393) ☐ ALUMINUM (R0417)
--

SHOCK POSITION

1 2 3 4 5 6

SUSPENSION BUSH

1 2 3 4 5 6

SPACER

mm

CAMBER

deg.

TOE ANGLE	deg.
HOLDER SUSP BUSH	☐ 20 ☐ 22 ☐ 2 ☐ 1
SWING SHAFT	☐ 54 ☐ 54R (90deg.) ☐ 56
MATERIAL	☐ STANDARD ☐ HARD
AXLE SPACER	mm
OFFSET SPACER	☐ YES ☐ NO
DOWN STOP	mm

CENTERING PLATE

☐ STD
mm
☐ REV
mm

SERVO SAVER

STEERING PLATE
☐ 9mm ☐ 10mm ☐ 11mm (STD)
POSITION
☐ FORWARD ☐ MIDDLE ☐ BACKWARD
TIGHTENING
mm

SERVO SAVER TYPE

☐ PLASTIC ☐ ALUMINUM (R0259)
--

SERVO SAVER POSITION

☐ FORWARD ☐ MIDDLE
--

SPACER

mm

SPRING

☐ SOFT ☐ HARD

WEIGHT / CARBON STIFFENER

WEIGHT / CARBON	ADDITIONAL WEIGHT	TOTAL CAR WEIGHT
☐ RIGHT ☐ MIDDLE ☐ LEFT ☐ CARBON	g	g
☐ CARBON (2P) ☐ CARBON (5P) ☐ STAINLESS (2P) ☐ BRASS (5P)		
SHORT WHEEL BASE	PULLEY	
F - mm / R - mm	STD ☐ / LF ☐ (R0432)	

R0390	R0391
R0389	R0363

WEIGHT

☐ 15g (T096B) ☐ 10g (SMJ3517 x2) ☐ 7.5g (SMJ3518)
--

UPPER PLATE TYPE

☐ STD

STIFFENER (R0388)

☐

ALUMINUM (R0420)

☐

10234-005 WINNITY F13-3-SETUP SHEET - JPN