

IF18-3 SET-UP SHEET ver.1.0

NAME	
DATE	
TRACK	
EVENT	

PINION	TRANSMISSION	SPUR	SHAFT
☐ 18T ☐ 19T ☐ 20T	☐ 1ST ☐ 60T ☐ 61T ☐ 62T	☐ 6mm	
☐ 23T ☐ 24T ☒ 25T	☐ 2ND ☐ 56T ☐ 57T ☐ 58T	☐ 8mm	

FRONT	SHOCKS	REAR
	SPRINGS	
#	OIL	#
☐ STD ☐ OPTION	O RING	☐ STD ☐ OPTION
☐ STD ☐ OPTION	MEMBRANE	☐ STD ☐ OPTION
_____HOLE(S)_____mm	PISTONS	_____HOLE(S)_____mm

FRONT	ANTI-ROLL BAR	REAR
	mm	mm

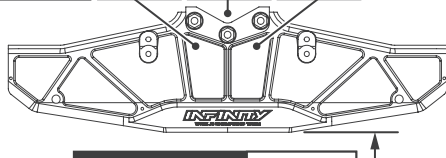
FRONT	RIDE HEIGHT	REAR
	mm	mm

FRONT	WIDTH	REAR
	mm	mm

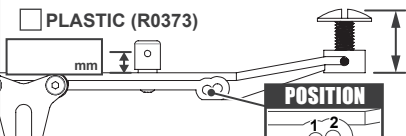
BRAND	TIRES	CONTROLLED
		☐ YES ☐ NO
LEFT FRONT RIGHT	DIAMETER	LEFT REAR RIGHT
mm mm		mm mm

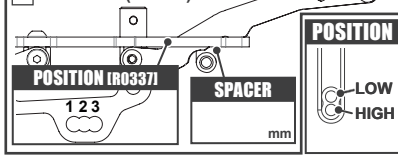
FRONT	WHEEL PLATE	REAR
☐ YES ☐ NO		☐ YES ☐ NO

BODY

BUMPER WEIGHT & BODY POSITION
WEIGHT g g g

BODY POSITION mm

FRONT CARBON PLATE (R0274)
☐ YES ☐ NO

REAR BODY MOUNT
☐ PLASTIC (R0373)

POSITION 1 2

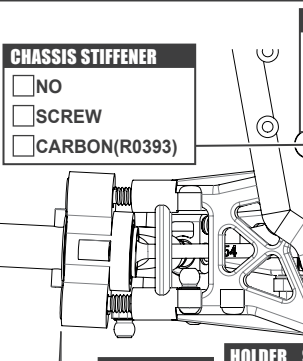
WEIGHT / CARBON STIFFENER
☐ CARBON (R0337)

POSITION 1 2


SHOCK TOWER
☐ R0081 ☐ R0336
☐ R0081W ☐ R0336W

LOWER ARM PLATE
☐ R0355W ☐ R0355N ☐ R0353
☐ YES ☐ NO

KNUCKLE BASE
☐ STANDARD (15.5) ☐ R0314B (13.5)

CASTER	SPACER
mm	mm
☐ 64 ☐ 62 ☐ 60 ☐ 60 (90deg.)	

CHASSIS STIFFENER
☐ NO ☐ SCREW ☐ CARBON (R0393)

TOE ANGLE deg.

CENTERING PLATE
☐ STD ☐ REV



WEIGHT / CARBON STIFFENER
☐ MIDDLE ☐ RIGHT ☐ LEFT
☐ CARBON (2P) ☐ CARBON (5P) ☐ BRASS (R0280)
CARBON STIFFENER ☐ MIDDLE CARBON

UPPER SUS BUSH	☐ SOFT ☐ HARD
UPPER SUS HOLDER	☐ STANDARD ☐ HARD ☐ ALUMINUM
SIDE SCREW	☐ YES ☐ NO
UPRIGHT UPPER	☐ STANDARD ☐ -1 ☐ 0 ☐ +1
CENTERING (R0328) / OFFSET BUSHING (R0327)	☐ YES ☐ NO
UPRIGHT LOWER	☐ STANDARD ☐ HARD
SUS ARM UPPER	☐ STANDARD ☐ HARD
SUS ARM LOWER	☐ STANDARD ☐ HARD
LOWER ARM END	☐ SOFT ☐ HARD ☐ OLD ☐ NEW
LOWER SUS HOLDER	☐ STANDARD ☐ HARD ☐ ALUMINUM
LOWER SUS BUSH	☐ SOFT ☐ STANDARD ☐ IN ☐ OUT
ONE WAY	☐ STANDARD ☐ 8mm (R0333)
STOPPER	☐ YES ☐ NO

SPACER	CAMBER
mm	deg.
AXLE SPACER	OFFSET SPACER
mm	☐ YES ☐ NO
DOWN STOP	mm

SHOCK POS	SUS BUSH	SPACER	CAMBER
1 2 3 4 5 6	1 2 3 4 5 6	mm	deg.
CHASSIS STIFFENER	TOE ANGLE	AXLE SPACER	OFFSET SPACER
☐ NO ☐ SCREW ☐ CARBON (R0393)	deg.	mm	☐ YES ☐ NO
DOWN STOP	SWING SHAFT	MATERIAL	MATERIAL
mm	☐ 54 ☐ 54R (90deg.) ☐ 56	☐ STANDARD ☐ HARD	☐ STANDARD ☐ HARD
LOWER ARM PLATE			
☐ 0 ☐ 1.5 ☐ 3.0			

SERVO SAVER
☐ 9mm ☐ 10mm ☐ 11mm (STD)
POSITION ☐ FORWARD ☐ MIDDLE ☐ BACKWARD
TIGHTENING mm
SERVO SAVER TYPE ☐ PLASTIC ☐ ALUMINUM (R0259)
SERVO SAVER POSITION ☐ FORWARD ☐ MIDDLE
SPACER mm
SPRING ☐ SOFT ☐ HARD

UPPER PLATE TYPE CUT
☐ STD

WEIGHT ☐ 15g (T096B) ☐ 10g (SMJ3517 x2) ☐ 7.5g (SMJ3518) ☐ 5g (SMJ3518)
☐ R0390 ☐ R0389 ☐ R0363 ☐ R0391 ☐ R0392