DESTINY — SET-UP SHEET — RX-10SR 3.0

DATE	30.04.2023	CONDITION	☐ FLAT ☑ BUMPY ☐ TIGHT ☐ OPEN ☐ CARPET ☑ ASPHALT (☐ INDOOR) (☑ OUTDOOR)
DRIVER	Schaffer,Alexander	TRACTION	HIGH ☐ ☐ ☑ ☐ ☐ LOW
		TEMP °C	AIR 17 TRACK 25

EVENT	RCK Challenge	TRACK	Hann Münden	QUALIFYING	1
FINAL	1				

FRONT

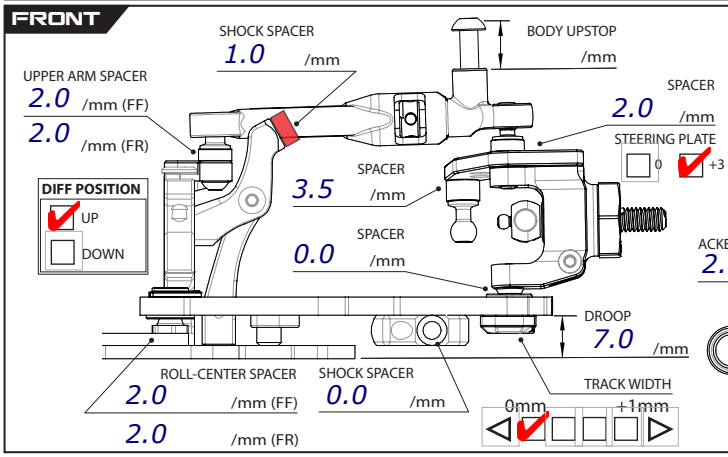

- FRONT DIFF: ☑ SPOOL ☐ DIFF # /CST
- WHEEL HUB: ☐ 4.0mm ☑ 5.0mm
- WHEEL SPACER: /mm

RIDE HEIGHT	5.1 /mm
CAMBER	1.5 °
CASTER	☑ 4° ☐ 5° °
SWAY BAR	☐ 1.3 ☐ 1.4 ☑ 1.2
DOUBLE JOINT DRIVE SHAFT	☑ KIT (44.5) ☐ LONG (47)
TOE ANGLE	1deg out °

SHOCK ABSORBER

OIL	400 /CST
LENGTH	Kit /mm
REBOUND	0 %
SPRING	☐ 2.5 ☐ 2.6 ☐ 2.7 ☑ xray 2.3-2.6
ABSORBER MEMBRANCE	Kit
PISTON	Kit

REAR

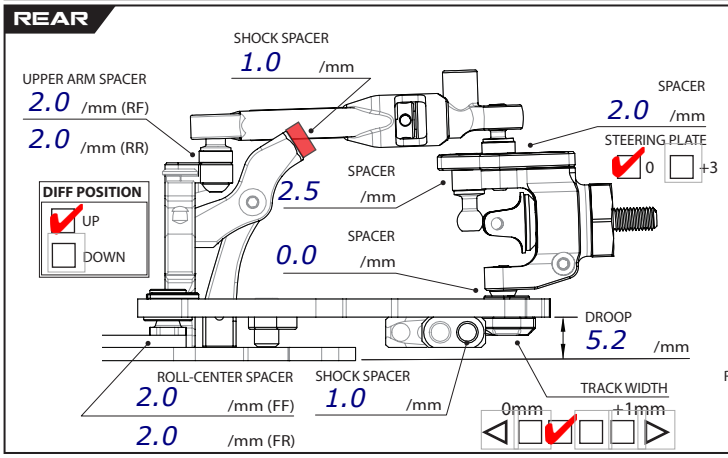

- DIFFERENTIAL OIL: # 5000k /CST; WEIGHT 1.5gr g
- WHEEL HUB: ☐ 4.0mm ☑ 5.0mm
- WHEEL SPACER: /mm
- ANTI-ROLL BAR POSITION: ☐ INNER ☑ OUTER

RIDE HEIGHT	5.3 /mm
CAMBER	2.0 °
CASTER	☑ 0° ☐ 1° °
SWAY BAR	☑ 1.2 ☐ 1.3
DRIVE SHAFT	☑ ALUMINIUM ☐ STEEL
TOE ANGLE	2.5

SHOCK ABSORBER

OIL	400 /CST
LENGTH	Kit /mm
REBOUND	0 %
SPRING	☐ 2.5 ☑ 2.6 ☐ 2.7
ABSORBER MEMBRANCE	Kit
PISTON	Kit

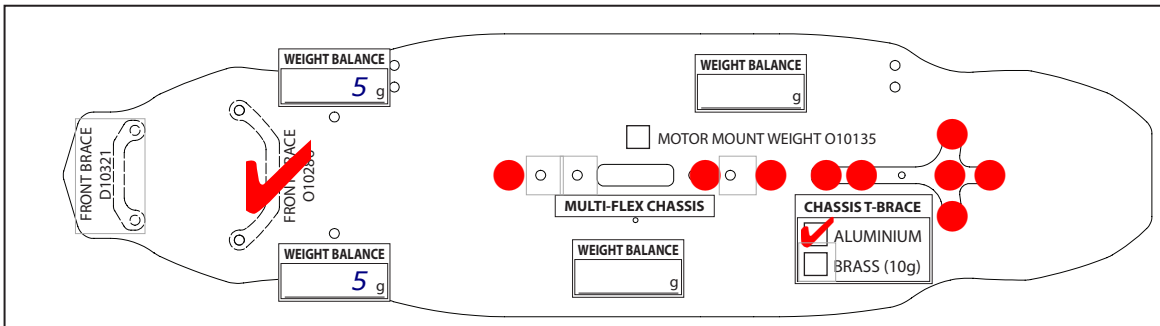

- TRACK WIDTH: FRONT /mm; REAR /mm
- BATTERY PLACEMENT: FORWARD; ☑ BACKWARD

- MAIN CHASSIS: ☑ GRAPHITE ☐ ALUM (FLEX) ☐ ALUM (SOLID)

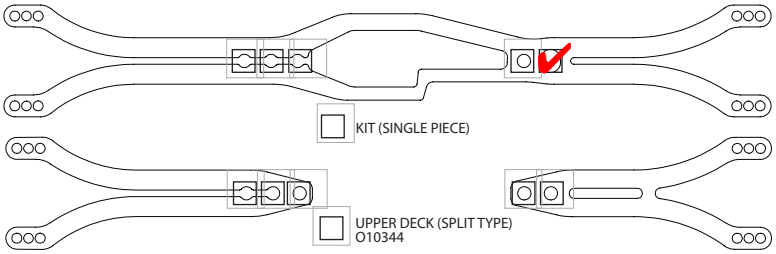

- UPPER DECK: ☐ 1.6mm ☑ 2.0mm

- SERVO HORN: SPACER 0.0 /mm; 19.0 /mm; ☐ KIT ☑ ALUM

TIRE SETTING

FRONT AND REAR

TIRE	RCK 36
INSERT	
WHEEL	
ADDITIVE	LRP Carpet&Asphalt 2
ADDITIVE TIME	Fr 15 /MINS - Rr 15 /MINS

MOTOR	RCK 17,5 TURNS	ROTOR	/mm	MOTOR TIMING	°
PINON GEAR	38T	SPUR GEAR	100T	FINAL RATIO	5.0

ESC	Hobbywing xr10	SETUP			
BATTERY	Sunpadow 6000mAh ☐ SHORT	BODY	Bwoah/Zoodiac	TOTAL WEIGHT	1320 /g

NOTES

By high Temperature no Additive no warming only clean with Additive
Under ESC 20gr.