DESTINY — SET-UP SHEET — RX-10SR 3.0

DATE	10. - 11.12.2022	**CONDITION**	☐ FLAT ☐ BUMPY ☐ TIGHT ☐ OPEN ☑ CARPET ☐ ASPHALT (☐ INDOOR) (☐ OUTDOOR)
DRIVER	Kalle Moritz	**TRACTION**	HIGH ☐ ☐ ☑ ☐ ☐ LOW
		TEMP °C	AIR TRACK

EVENT	MRC Longwy Winter Serie	**TRACK**		**QUALIFYING**	**FINAL**

FRONT

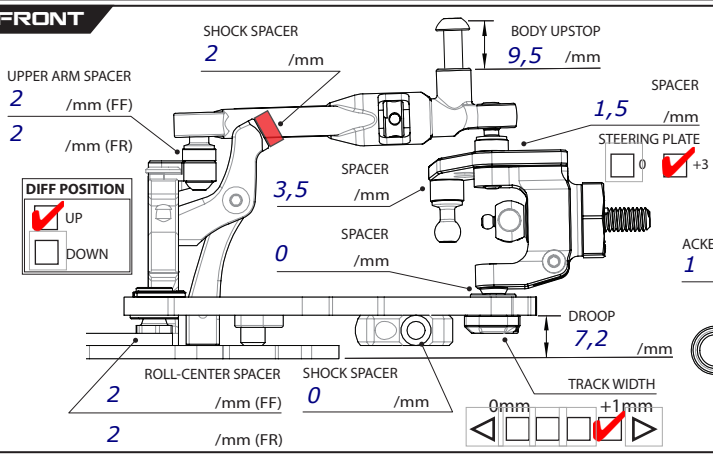

FRONT DIFF
☑ SPOOL ☐ DIFF # /CST

WHEEL HUB
☑ 4.0mm ☐ 5.0mm

WHEEL SPACER /mm

RIDE HEIGHT	5 /mm
CAMBER	1,5 °
CASTER	☐ 4° ☑ 5° °
SWAY BAR	☑ 1.3 ☐ 1.4 ☐
DOUBLE JOINT DRIVE SHAFT	☐ KIT (44.5) ☐ LONG (47)
TOE ANGLE	1 °

SHOCK ABSORBER

OIL	450 /CST
LENGTH	52,3 /mm
REBOUND	0 %
SPRING	☐ 2.5 ☐ 2.6 ☐ 2.7 ☑ 2,5-2,8
ABSORBER MEMBRANCE	
PISTON	1,1mm 4 hole

REAR

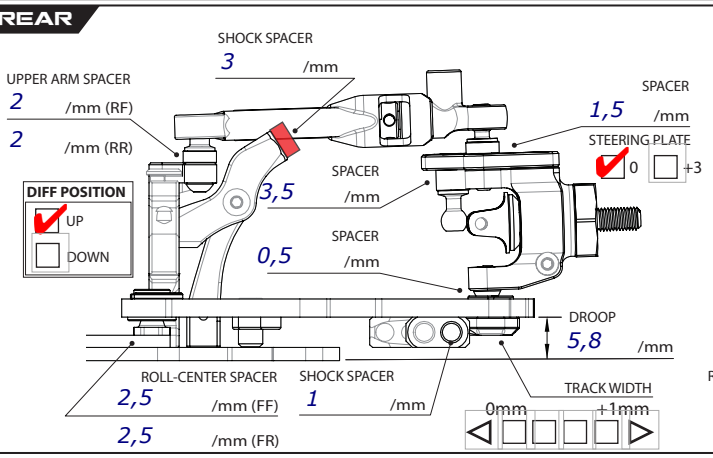

DIFFERENTIAL OIL
8000 /CST
WEIGHT g

WHEEL HUB
☐ 4.0mm ☑ 5.0mm

WHEEL SPACER /mm

ANTI-ROLL BAR POSITION
☐ INNER ☑ OUTER

RIDE HEIGHT	5,2 /mm
CAMBER	2,0 °
CASTER	☑ 0° ☐ 1° °
SWAY BAR	☐ 1.2 ☐ 1.3 ☐
DRIVE SHAFT	☑ ALUMINIUM ☐ STEEL
TOE ANGLE	3

SHOCK ABSORBER

OIL	450 /CST
LENGTH	52,3 /mm
REBOUND	0 %
SPRING	☐ 2.5 ☑ 2.6 ☐ 2.7 ☐
ABSORBER MEMBRANCE	
PISTON	1,1mm 4 hole

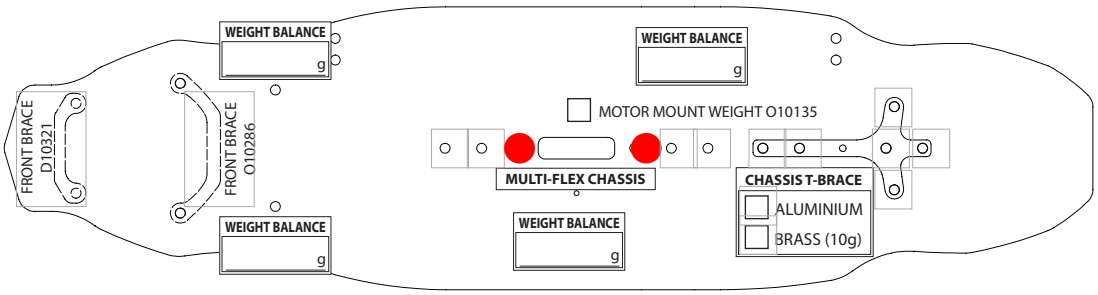

TRACK WIDTH
FRONT /mm
REAR /mm

BATTERY PLACEMENT


MAIN CHASSIS
☐ GRAPHITE
☑ ALUM (FLEX)
☐ ALUM (SOLID)

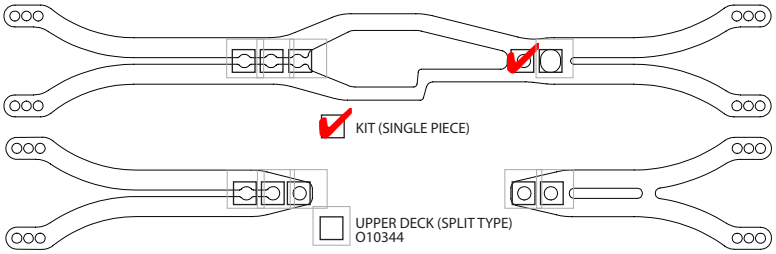

UPPER DECK
☐ 1.6mm
☑ 2.0mm

SERVO HORN


TIRE SETTING

FRONT AND REAR

TIRE	Volante V5 PG28CP
INSERT	
WHEEL	
ADDITIVE	MR33
ADDITIVE TIME	Fr 20 /MINS - Rr 20 /MINS

MOTOR	Orca 17,5 TURNS	**ROTOR**	/mm	**MOTOR TIMING**	fix °
PINON GEAR	42T	**SPUR GEAR**	100T	**FINAL RATIO**	4,76
ESC		**SETUP**			
BATTERY	6000 ☐ SHORT	**BODY**	Wolverine 0,7	**TOTAL WEIGHT**	1306 /g

NOTES