DESTINY — SET-UP SHEET — RX-10SR 3.0

DATE	11.12.22	CONDITION	☑ FLAT ☑ BUMPY ☐ TIGHT ☑ OPEN	TRACTION	HIGH ☐ ☑ ☐ ☐ ☐ LOW
DRIVER	Will Everett		☑ CARPET ETS ☐ ASPHALT (☑ INDOOR) (☐ OUTDOOR)	TEMP °C	AIR Cold TRACK

EVENT	TRACK	QUALIFYING	FINAL
MiCC Rnd 3		4th	6th

FRONT

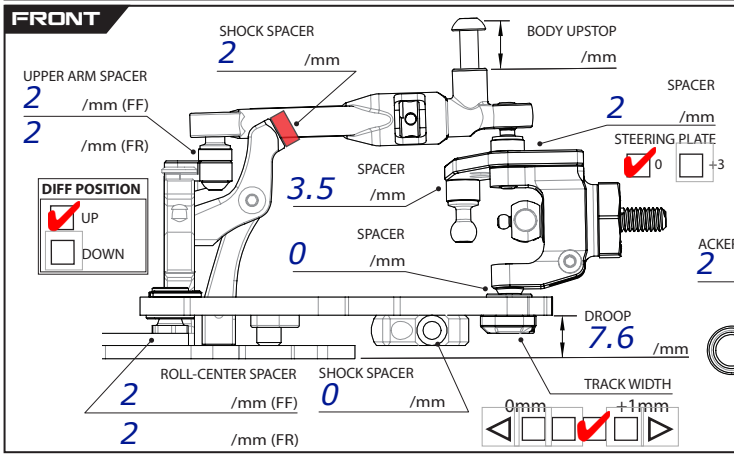

FRONT DIFF
☑ SPOOL ☐ DIFF # /CST

WHEEL HUB
☐ 4.0mm ☑ 5.0mm

WHEEL SPACER
0 /mm

RIDE HEIGHT	CAMBER	CASTER	SWAY BAR	DOUBLE JOINT DRIVE SHAFT	TOE ANGLE
5.2 /mm	1 Deg °	☑ 4° ☐ 5° °	☑ 1.3 ☐ 1.4 ☐	☑ KIT (44.5) ☐ LONG (47)	1 Deg out °

SHOCK ABSORBER

OIL	LENGTH	REBOUND	SPRING	ABSORBER MEMBRANCE	PISTON
Hudy 350 /CST	10 /mm	0 %	☐ 2.5 ☐ 2.6 ☐ 2.7 ☑ Yok 2.4-2.9	Kit	4x1mm

REAR

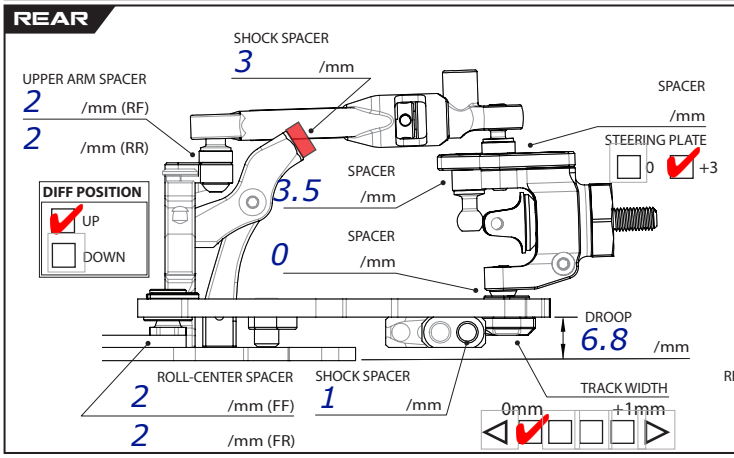

DIFFERENTIAL OIL
Hudy 10K /CST
WEIGHT 1.5 g

WHEEL HUB
☐ 4.0mm ☑ 5.0mm

WHEEL SPACER
.5 /mm

ANTI-ROLL BAR POSITION
☐ INNER ☑ OUTER

RIDE HEIGHT	CAMBER	CASTER	SWAY BAR	DRIVE SHAFT	TOE ANGLE
5.4 /mm	2 °	☑ 0° ☐ 1° °	☑ 1.2 ☐ 1.3 ☐	☑ ALUMINIUM ☐ STEEL	3 Deg

SHOCK ABSORBER

OIL	LENGTH	REBOUND	SPRING	ABSORBER MEMBRANCE	PISTON
Hudy 375 /CST	10 /mm	0 %	☐ 2.5 ☐ 2.6 ☐ 2.7 ☑ Yok 2.4-2.9	Kit	4x1mm

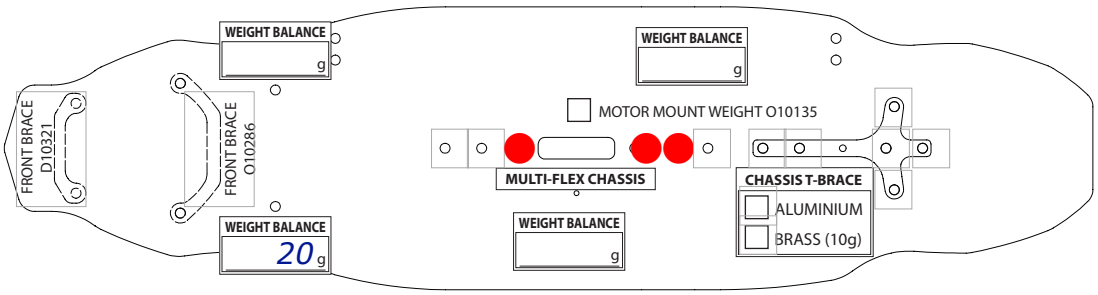

TRACK WIDTH
FRONT /mm
REAR /mm

BATTERY PLACEMENT
FORWARD
☑ BACKWARD

MAIN CHASSIS
☐ GRAPHITE
☐ ALUM (FLEX)
☑ ALUM (SOLID)

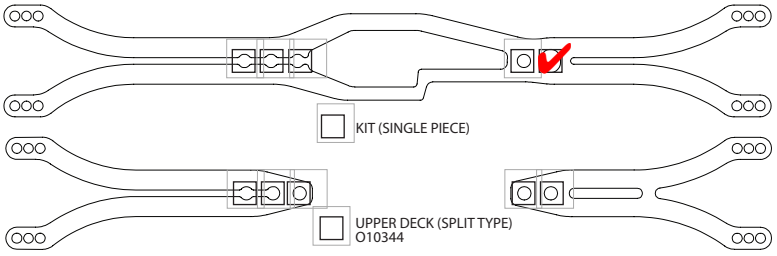

UPPER DECK
☐ 1.6mm
☐ 2.0mm

SERVO HORN
SPACER /mm
/mm
☐ KIT ☐ ALUM

TIRE SETTING

FRONT AND REAR

TIRE	INSERT	WHEEL	ADDITIVE	ADDITIVE TIME
Volante MiCC	Volante MiCC	Volante MiCC	Fly Juice	Fr 8 /MINS - Rr 30 /MINS

MOTOR	ROTOR	MOTOR TIMING
Team Powers 17.5 TURNS	/mm	42 °

PINON GEAR	SPUR GEAR	FINAL RATIO
49T	100T	3.88

ESC	SETUP
LRP Flow X	

BATTERY	BODY	TOTAL WEIGHT
6250 ☐ SHORT	Twister Speciale	/g

NOTES