

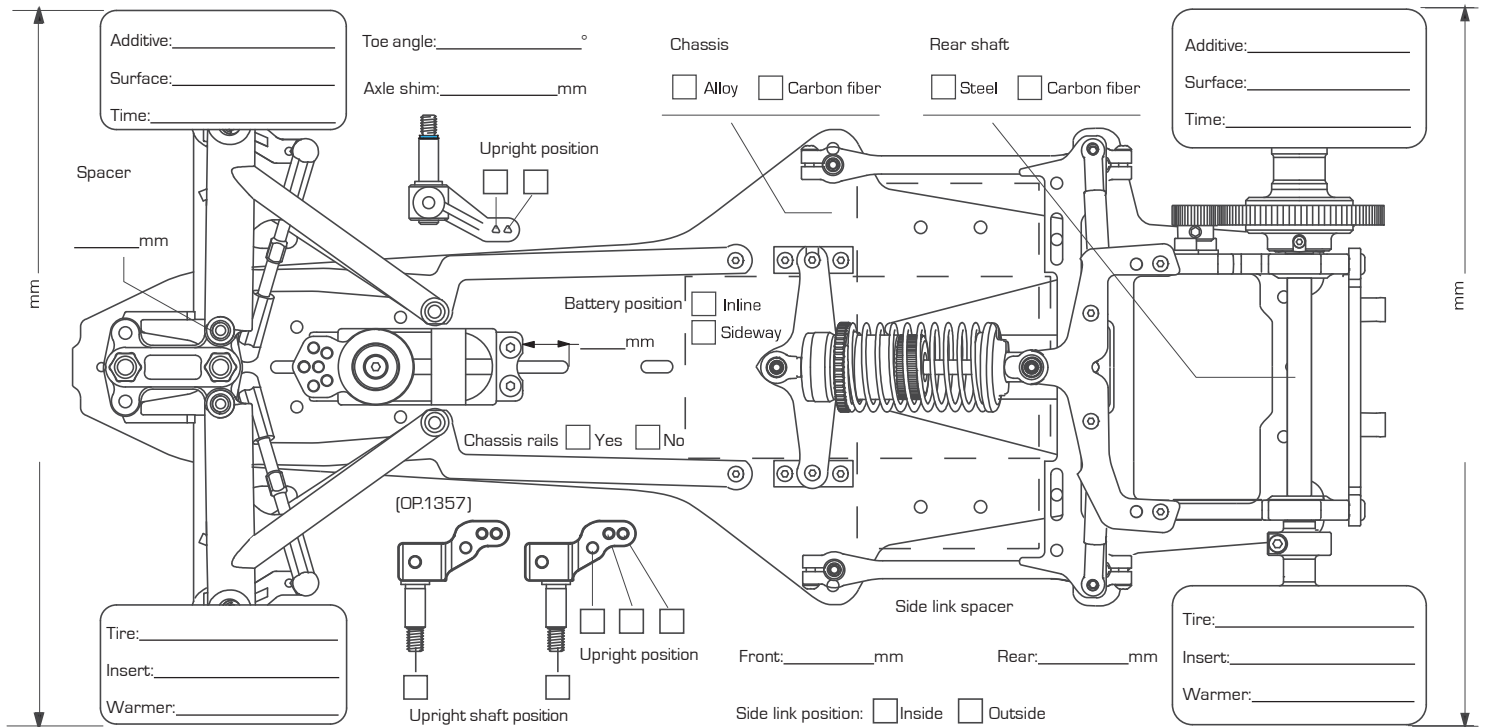


Name _____

Date _____

Event _____

Composition ☐ Asphalt ☐ Indoor Surface ☐ Smooth ☐ Medium ☐ Bumpy Layout ☐ Tight ☐ Mixed ☐ Open Humidity
☐ Carpet ☐ Outdoor Traction ☐ Low ☐ Medium ☐ High Track temp. Air temp.

Belt: ☐ Yes ☐ No

Castor: _____°

Spacer: _____mm

Spacer: _____mm

Wheelbase: ☐ Short ☐ Long

Camber: _____°

Camberlink: ☐ Short ☐ Long

Camberlink shims: _____mm

Spring: _____

Ackermann: _____

Front

Rear

Ground clearance: _____mm

Ground clearance: _____mm

Roll spring: _____

Ground clearance: _____mm

Preload - L: _____ - R: _____

Droop: _____mm

Diff grease: _____

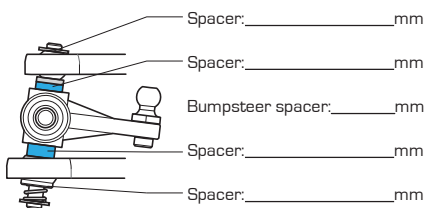
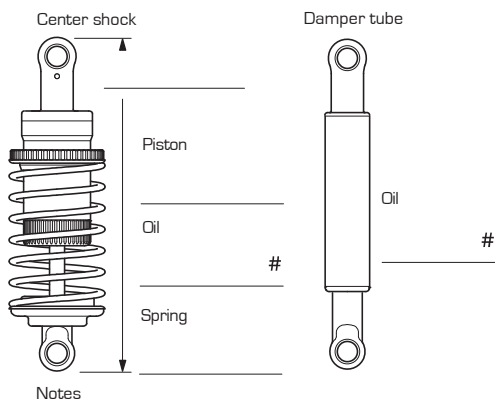
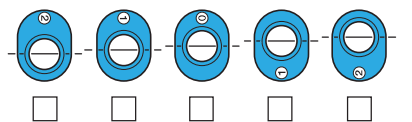

Bearing: ☐ Standard ☐ Thrust**IFS Front**

Droop: _____mm

Damper oil: _____cst

Spring: ☐ Silver (Hard)
☐ Dark Grey (Medium)
☐ Blue (Soft)
☐ Yellow (Extra Soft)

Shock tower hole:

☐ Bottom ☐ Middle ☐ Top**Rear Ground Clearance**

Motor: _____
Timing: _____
Spur/Pinion: _____
ESC: _____
ESC Setting: _____
Battery: _____
Body: _____
Front wing: _____
Front wing setting: _____
Rear wing: _____
Rear wing height: _____
Rear wing setting: _____

Notes