


NAME: SMALL ASPHALT TRACK GOOD TRACTION DATE: 1/2022 TRACK: CAL RACEWAY
 AIR TEMP: 75F TRACK TEMP: _____ TRACK SURFACE: CARPET ASPHALT TRACTION: LOW MEDIUM HIGH
 QUALIFYING POSITION: _____ FINISHING POSITION: _____ FAST LAP: _____

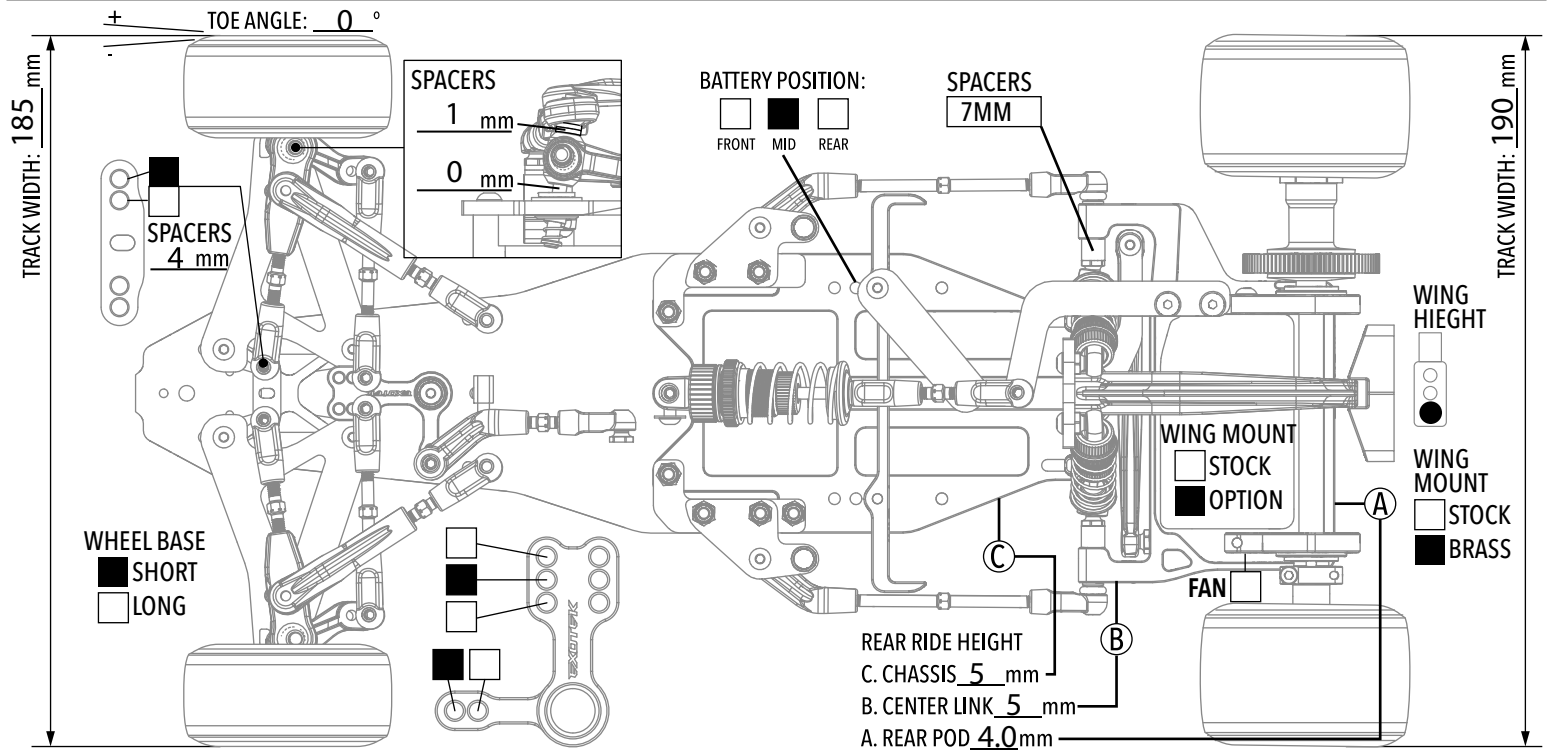

FRONT

CAMBER: 1.7 °

CASTER: 10 °

DROOP: 1.5 mm

TOE : 1° OUT

BUMPSTEER: 0 mm

RIDE HEIGHT: 5 mm

SWAY BAR
 1.0 1.2 1.4

FRONT DAMPER
 1MIL

SPRING: STOCK

PIN LUBE: 350CST AT THE SWIVEL BALL

FRONT WING: ZEN

ADDITIONAL WEIGHT: 12gr MASS DAMPER

SHOCKS

CENTER SHOCK →

PISTON: STOCK hole(s)

OIL: 400 wt EXOTEK

OUTER SPRING: STOCK

INNER SPRING STOCK

LENGTH: 41.75 mm

← SIDE SHOCK

PISTON: STOCK hole(s)

OIL: 400 wt

BLACK OR YELLOW SPRING: TRY EACH IN PRACTICE

LENGTH: 7 mm

← SIDE SHOCK POSITION

OUTSIDE - 1 INSIDE - 2

REAR

MICRO SHOCK DROOP: .5 mm

RIDE HEIGHT INSERT:

DIFFERENTIAL:

BALL: SLIP ← → TIGHT

TIGHTNESS:

GEAR: FLUID: _____

SPOOL:

REAR SHAFT: stock ball diff/ stock grease

REAR WING: STOCK

BODY: EXOTEK ULTRA


SERVO: EXPERT

MOTOR: R1 V21 25.5, 40°

GEARING - PINION: 34 SPUR: 86

ESC: TEKIN SPEC-TORQ 60-90%

BATTERY: WOLFPACK 4200 SHORTY

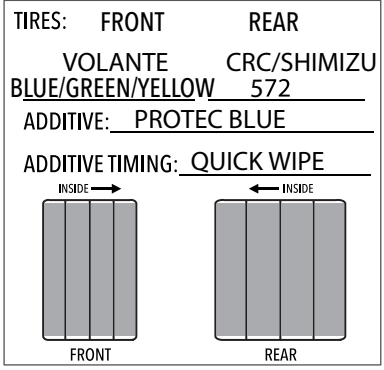

COMMENTS

GRIND RIBS OFF OF REAR TIRE SIDEWALLS

SELECT FRONT TIRE COLOR FOR HANDLING BALANCE

XRAY SERVO SAVER- EXTRA FIRM

TQ 16G THIN WIRES FOR MOTOR

HEAT REAR TIRES IF COLD

TITANIUM TURNBUCKLES