

Driver _____

Race _____

Track _____

Date _____

Surface ☐ Asphalt Outdoor ☐ Asphalt Indoor ☐ Carpet

Layout ☐ Technical ☐ Mixed ☐ Fast

Traction ☐ Low ☐ Medium ☐ High

Gear diff oil/cst: _____

Gear diff oil/grams: _____

Spur _____

Pinion _____

Final drive ratio (1.9) _____

Front _____

Middle _____

Rear _____

Front	Shocks	Rear
	Spring	
	Oil	
	Piston	
soft (silver) 3mm 5mm med (black) ☐ ☐ ☐ ☐	Internal shock spring	soft (silver) 3mm 5mm med (black) ☐ ☐ ☐ ☐


Spring _____ **Oil** _____ **Preload** _____

<i>Front</i>		<i>Rear</i>
Stabilizer Thickness		
Weight balance %		

Front		Rear
	Tires	
	Additive	
	Additive time	
	Treated area	

Motor _____	Timing _____
ESC _____	Battery _____
Body _____	Wing _____

www.miris-racing.com



Ackermann setting

mm

Steering lock inside tire


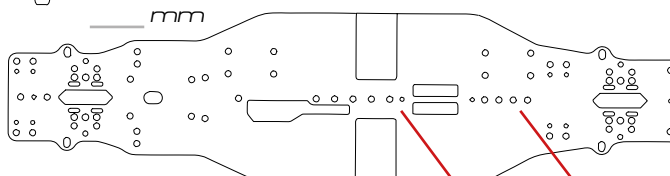
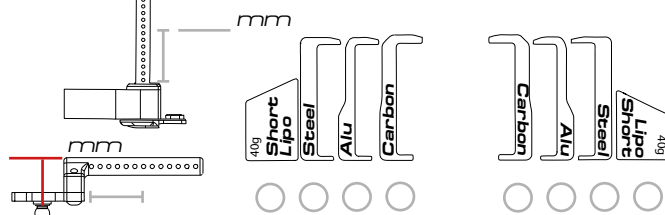
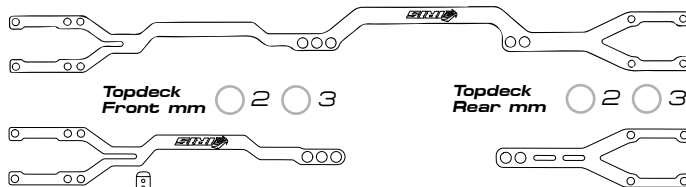
Screw diameter

Servo arm length

mm

degree

mm

[illegible][illegible]

Chassis

☐ Carbon ☐ Alu Liniar Flex