

Driver _____
Race _____
Track _____
Date _____

Composition	☒ Asphalt	☐ Carpet	
Environment	☒ Outdoor	☐ Indoor	
Layout	☐ Technical	☐ Mixed	☐ Fast
Traction	☐ Low	☐ Medium	☐ High
Surface	☐ Flat	☐ Bumpy	

Gear diff oil/cst: _____

Gear diff oil/grams: _____

Spur _____

Pinion _____

Final drive ratio (1.9) _____

Front _____

Middle _____

Rear _____

Front	Shocks	Rear
	Spring	
	Oil	
	Piston	
soft med 3mm 5mm 7mm	Internal shock spring	soft med 3mm 5mm 7mm


<i>Front</i>		<i>Rear</i>	
Stabilizer Thickness			
Weight balance %			

Treated Area

The diagram shows four rounded rectangular areas, each divided by a vertical dashed line. The areas are labeled **FL**, **FR**, **RL**, and **RR** from left to right. The label **Treated Area** is positioned to the left of the first two rectangles.

Motor _____	Timing _____
ESC _____	Battery _____
Body _____	Wing _____

minis-racing.com




mm

Screw diameter


mm

degree

mm







medium ☐ hard ☐
medium ☐ hard ☐

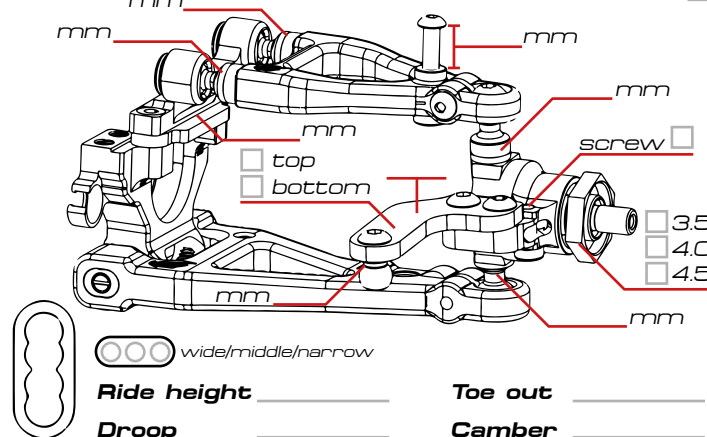

medium ☐ hard ☐

medium ☐ hard ☐

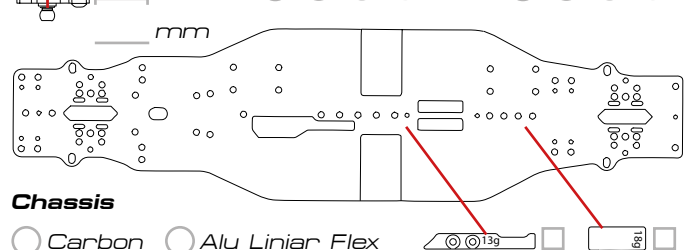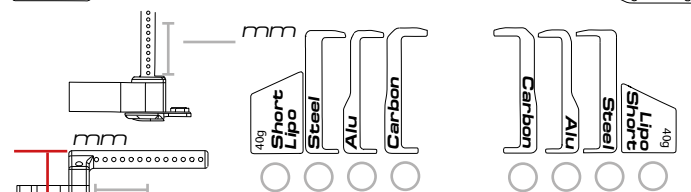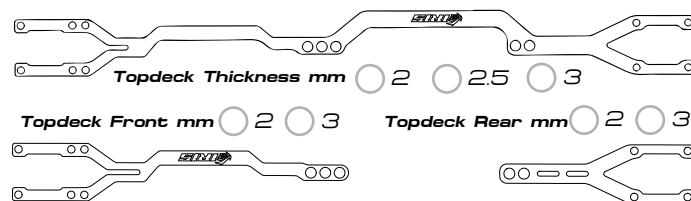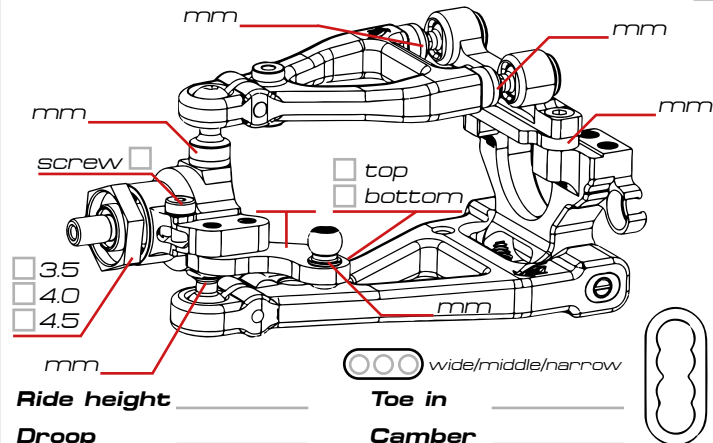

Chassis

☐ Carbon ☐ Alu Liniar Flex