

SETUP SHEET

Driver _____
 Race _____
 Track _____
 Date _____

Track Conditions

Composition ☐ Asphalt ☐ Carpet
Environment ☐ Outdoor ☐ Indoor
Layout ☐ Technical ☐ Mixed ☐ Fast
Traction ☐ Low ☐ Medium ☐ High
Surface ☐ Flat ☐ Bumpy

Transmission

Gear Diff oil/cst: _____
Gear Diff oil/grs _____
Spur _____
Pinion _____
Final Drive Ratio (1.9) _____

Belt Width

Front _____
Middle _____
Rear _____

Front	Shocks	Rear
_____	Spring _____	_____
_____	Oil _____	_____
_____	Piston _____	_____


Soft Med 3mm 5mm 7mm **Internal shock spring** Soft Med 3mm 5mm 7mm

Front	Stabilizer Thickness	Rear
_____	_____	_____
_____	Weight balance % _____	_____

Tyres _____
Additive _____
Additive time _____
Treated Area

FL	FR	RL	RR

Motor _____ **Timing** _____
ESC _____ **Battery** _____
Body _____ **Wing** _____



Ackermann setting

_____ mm

Steering lock inside tire


Screw diameter

Servo arm length

_____ mm

_____ degree

_____ mm



FRONT



Caster

☐ 4.0°
☐ 5.0°

Upper Arm Mount

Lower Arm Medium ☐ Hard ☐

Std ☐ -1mm ☐

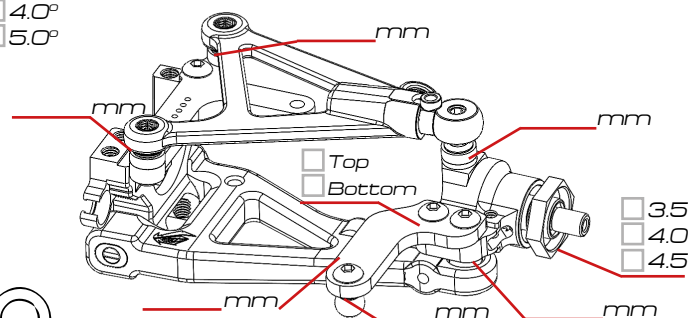

Wide/Middle/Narrow

Ride Height

Droop

Toe

Camber

REAR


Caster

☐ 2.0°
☐ 4.0°

Upper Arm Mount

Lower Arm Medium ☐ Hard ☐

Std ☐ -1mm ☐

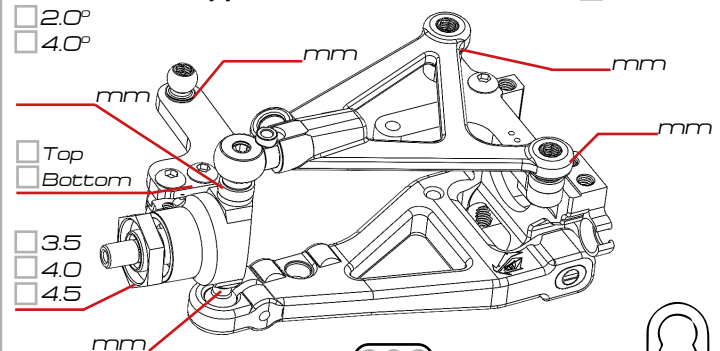




Ride Height

Droop

Wide/Middle/Narrow

Toe In

Camber

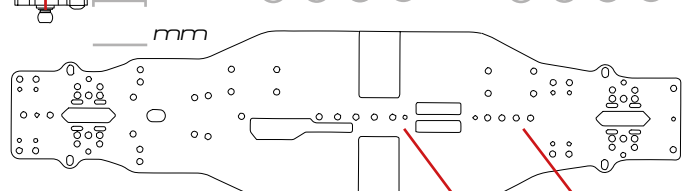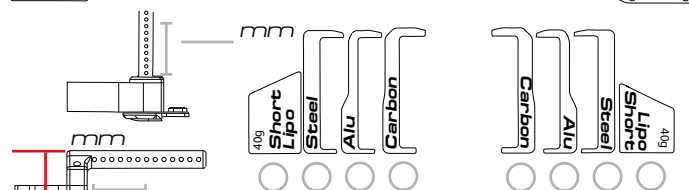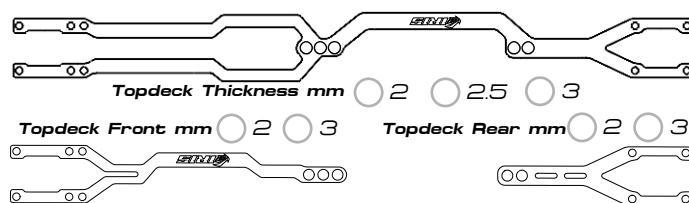

Chassis

☐ Carbon ☐ Alu Linear Flex ☐ 13g ☐ 15g ☐