

SETUP SHEET

Driver _____
 Race _____
 Track _____
 Date _____

Track Conditions

Composition ☐ Asphalt ☐ Carpet
Environment ☐ Outdoor ☐ Indoor
Layout ☐ Technical ☐ Mixed ☐ Fast
Traction ☐ Low ☐ Medium ☐ High
Surface ☐ Flat ☐ Bumpy



Transmission

Gear Diff oil/cst: _____
Gear Diff oil/grs _____
Spur _____
Pinion _____
Final Drive Ratio (1.9) _____

Belt Width





Front _____
Middle _____
Rear _____

Front	Shocks	Rear
	Spring	
	Oil	
	Piston	
Soft Med 3mm 5mm 7mm ☐ ☐ ☐ ☐ ☐ ☐	Internal shock spring	Soft Med 3mm 5mm 7mm ☐ ☐ ☐ ☐ ☐ ☐





Front		Rear
		
	Stabilizer Thickness	
	Weight balance %	

Tyres _____
Additive _____
Additive time _____
Treated Area

FL	FR	RL	RR
			

Motor _____	Timing _____
ESC _____	Battery _____
Body _____	Wing _____



Ackermann setting

_____ mm

Steering lock inside tire


Screw diameter

Servo arm length

_____ mm

_____ degree

_____ mm



FRONT

Caster



☐ 4.0°
☐ 5.0°

Upper Arm Mount

Lower Arm

Medium ☐ Hard ☐

Std ☐ -1mm ☐

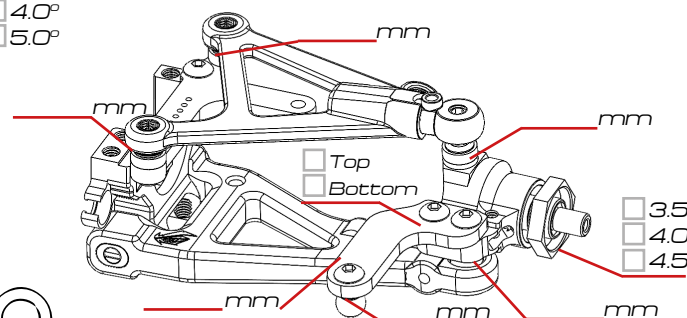

Wide/Middle/Narrow

Ride Height

Droop

Toe

Camber

REAR

Caster


☐ 2.0°
☐ 4.0°

Upper Arm Mount

Lower Arm

Medium ☐ Hard ☐

Std ☐ -1mm ☐

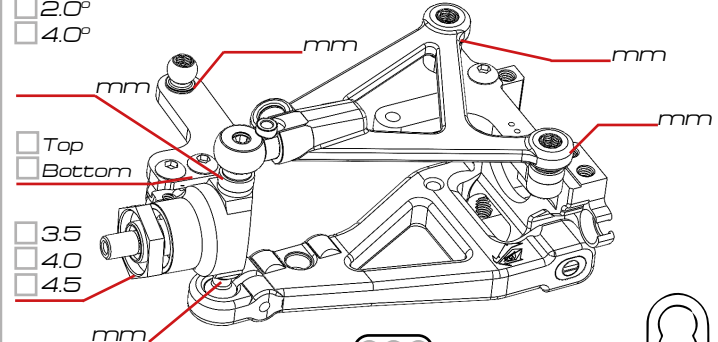




Wide/Middle/Narrow

Ride Height

Droop

Toe In

Camber

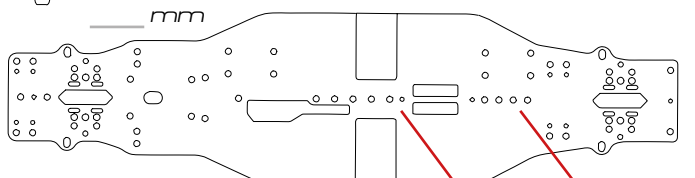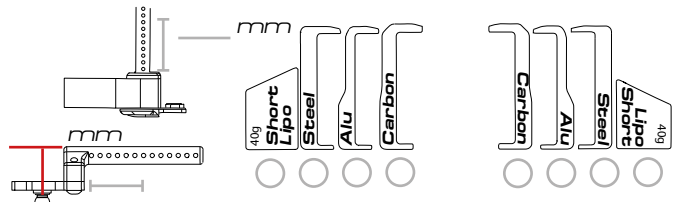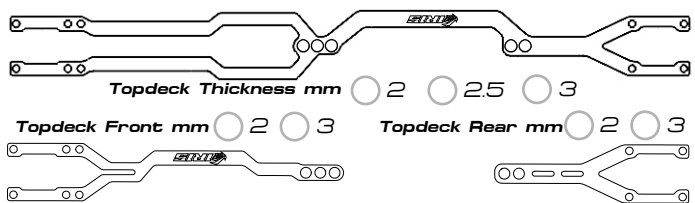

Chassis

☐ Carbon ☐ Alu Linear Flex ☐ 13g ☐ 15g ☐