


Name _____ Date _____ Track/City _____ Event _____ Ver.1.0 - Arn0

Front


Shock Position:

☐ FAW222



Camber Angle: _____ °

- 0 +



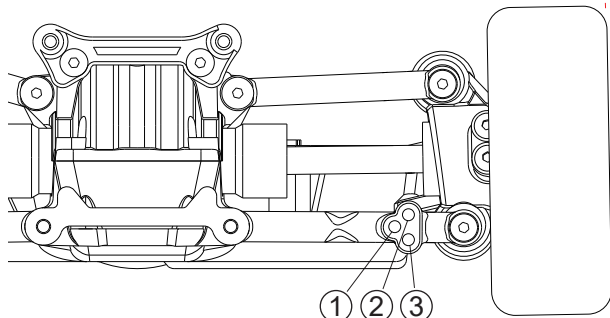


☐ Normal
☐ FAW205



☐ Type 1
Normal-2.5°

☐ Type 2
Normal-0.5°

☐ Type 3
Normal-1.0°




Upper Arm Spacer



Ride Height: _____ mm

Tie Rod:

☐ Normal
☐ Adjustable



☐ FAW208

Sway Bar: _____




Front Diff.:

☐ Spool
☐ Oneway
☐ Diff.
☐ 4 Bevel
Diff. Oil

Rear


Shock Position:

☐ FAW223





Camber Angle: _____ °

- 0 +

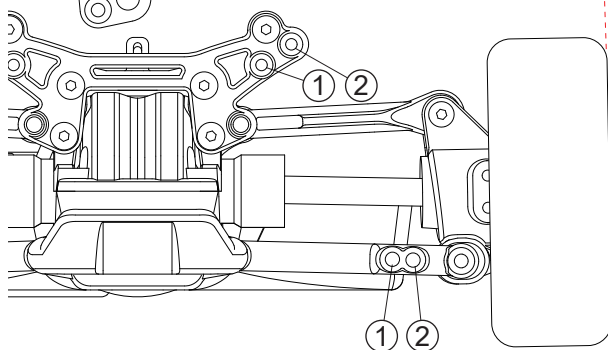

☐ Normal
☐ FAW206

Upper Arm Position:



Ride Height: _____ mm

☐ FAW208

Sway Bar: _____



Rear Diff.:


☐ 4 Bevel
Diff. Oil

Shock


Front

Rear

☐ Standard



☐ FAW225




Piston _____
Oil # _____ # _____
Spring _____
Length A _____ mm _____ mm
Length B _____ mm _____ mm
Spacer C _____ mm _____ mm

Chassis Width

☐ 190mm

☐ 200mm

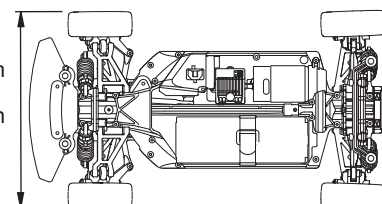

Tire

Comments

Tire _____
Insert _____
Wheel _____
Traction Compound 1st: _____ 2nd: _____

Others

Motor _____ (Timing: _____)

Pinion/Spur _____ / _____ Input/Ring _____ / _____

Battery _____ ESC _____

Body _____ Wing _____ / + °

Track Condition

☐ Smooth ☐ Asphalt
☐ Bumpy ☐ Concrete
☐ Low Traction ☐ Carpet
☐ Medium Traction ☐ Indoor
☐ High Traction ☐ Outdoor

Comments :