

Name: William Date: 6/20/2007 Event: _____

City: Oshkosh State: WI Track: Hobbytown

Track Conditions

☐ Indoor	☐ Tight	☐ Asphalt	☐ Sealed	☐ Low Bite
☐ Outdoor	☐ Open	☐ Concrete	☐ Smooth	☐ Med Bite
		☐ Carpet	☐ Rough	☐ High Bite

Front Suspension

Toe: -1

Ride Height: 5

Camber: -2

Kick/Anti-Dive: 0

Caster: 4

Droop: 2

Front Pivot: ☐ 0° ☐ 1° ☐ 2°

Roll Center: High

Arm Spacing: Middle

Shock Position: 2

Steering Rack: 2

Spindle Ackerman: 1

Camber Link: 3

Camber Ball Stud: Standard Link

Sway Bar: 0.030

Up Travel: _____

Arm Length: ☐ Short ☒ Long

Front Drivetrain

Front Drive: ☒ Spool ☐ One-way ☐ Diff

Grease Type: _____

Pulley: ☒ 41 ☐ 42

Diff Height: ☒ High ☐ Low

Drive Axle: Stock

Hex Width: ☒ .165 stk. ☐ .195 ☐ .225

Shocks

Oil: 40

Oil Brand: Losi

Piston: 56

Spring: 15 Pound


Bladder: Stock

Above Bladder: Tamiya Red Foam

"JR" Link

☐ High

☐ Low



0 # of Washers Under Ball Stud

- Size Of Washer

Standard Type of Ball Stud


Steering Rack

1 # of Washers Under Ball Stud

1 mm Size Of Washer

Standard Type of Ball Stud

Spindle



Rear Suspension

Toe: 1

Ride Height: 5

Droop: 2

Camber: -1

Anti/Pro Squat: 0

Hub: ☒ STD. ☐ Offset ☐ 0° ☐ 1/2° ☐ 1° ☐ 2°

Rear Pivot: ☒ 0° ☐ 1° ☐ 2°

Roll Center: High

Arm Spacing: Back

Shock Position: 2

Camber Link: 5/A

Camber Link Ball Stud: High

Sway Bar: 0.050

Up Travel: _____

Arm Length: ☐ Short ☒ Long

Rear Drivetrain

Diff Height: ☐ High ☒ Low

Drive Axle: Stock

Hex Width: ☒ .165 stk. ☐ .195 ☐ .225

Shocks

Oil: 40

Oil Brand: Losi

Piston: 56

Spring: 10 Pound


Bladder: Stock

Above Bladder: Tamiya Red Foam

Outside
Inside

0 # of Washers Under Ball Stud

0 Size Of Washer

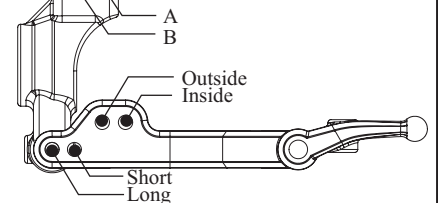

Body Speed 6

Wing Small

FR Body Hole ☐ Inside ☐ Outside

RR Body Hole ☐ Inside ☐ Outside

5th Body Hole _____

Body Height _____

Motor Novak 13.5

Turns _____

Brushes _____

Springs _____

Timing _____

Spur Gear 116

Pinion Gear 50

Ratio 4.2

Roll Out _____

Fans _____

Servo Airtronics 94360

ESC GTB

Receiver Spektrum

Battery IB 4200

Transponder Location Under Front Diff

Tires:	Brand/Compound	Size (mm)	Insert	Wheel	Tire Warmers
Front:	<u>Take Off CS-27</u>	_____	_____	_____	☐ YES ☐ NO Temp °F or °C
Rear:	<u>Take Off CS-27</u>	_____	_____	_____	

Tire Additive

Front Tire

Rear Tire

Shade areas where additive was applied

NOTES:
Not Bad !!!

