



SETUP SHEET

Track: Lube / Clearwater, FL

Driver: Terrance

Date: 5/9/2015

☐ Indoor
☒ Outdoor

☒ Tight / ☒ Open

☐ Carpet
☐ Concrete
☒ Asphalt

☐ Sealed
☒ Smooth
☐ Rough

FRONT SUSPENSION

(Circle or Check the Appropriate Settings)

☐ In
Toe ☐ Out 0

Ride Height 5.5

☒ -
Camber ☐ + 1

☐ Kickup

Caster ☐ Carrier 0

☒ No
Sway Bar ☐ Yes size

Front Shocks

Oil: 50

Piston: Black ☒ Standard / ☐ Drilled

Spring: Blue

Limiters: ☐ Inside ☐ Outside

Droop Height: 2

Pivot Support: 0R

Arm Spacing

☒ FWD

☐ MDL

☐ BACK

Front Drive:

☐ Diff

☐ One-Way

☐ Standard


☐ Overdrive

☒ Underdrive

of washers under steering/
tie-rod ball studs

Spindle ball stud: 0

Bellcrank ball stud: 0

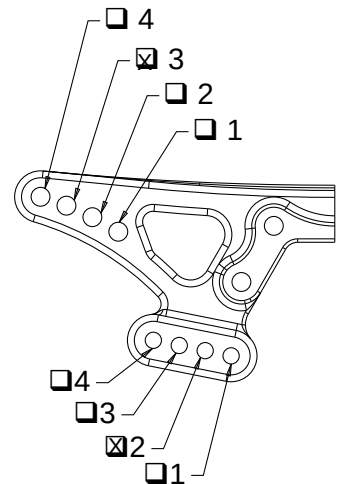

NOTES: Front Drive > Spooler

Underdrive front and rear

Arm spacing one AE .030 washer front

REAR SUSPENSION

☒ In
Toe ☐ Out 2

Ride Height 6.0

☒ -
Camber ☐ + 1

☒ No
Sway Bar ☐ Yes size

Rear Shocks

Oil: 50

Piston: Black ☒ Standard / ☐ Drilled

Spring: Silver

Limiters: ☐ Inside ☐ Outside

Droop Height: 5

Pivot Support: 0R

Arm Spacing

☐ FWD

☒ MDL


☐ BACK

☐ B

☒ A

☒ Outside

☐ Inside

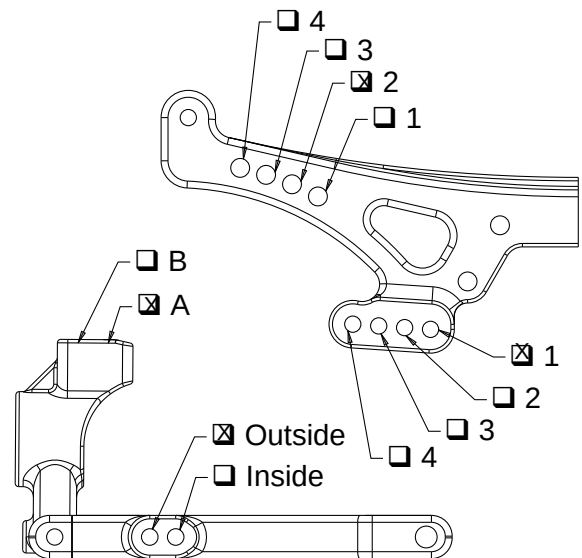

NOTES: TC3 rear hubs

Tires:

Front: HPI

Rear: HPI

Compound

D

D

Foam

HPI

HPI

Length

Motor: SP 25.5

Pinion: 38

Spur: 69

Tire Diameter:

Body: Parma 70 Cuda

Body Height: Roar Spec's

Battery Placement: ☐ Back ☐ Forward ☒ Other: Middle

Transponder Position: On top of steering servo

Notes: XXX4 spur hub with sand paper pads in place of slipper pucks

AE B4 96 spur w/center opened to fit XXX4 spur hub

Results > TQ = 3 / 1st = 2 / 2nd = 1