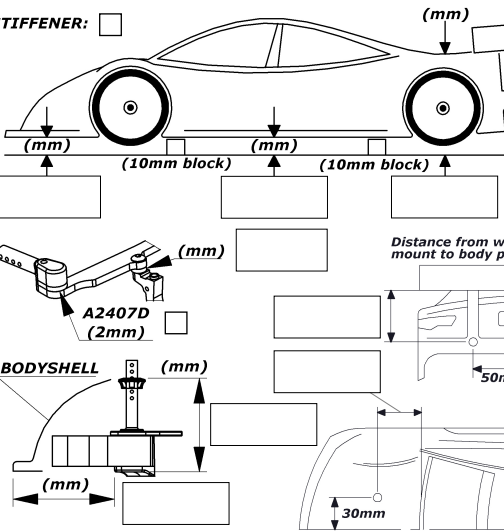


MTC2R SETUP SHEET

NAME:		DATE:	
TRACK:		RACE:	
TRACK SURFACE:		CARPET ☐	ASPHALT ☐
LAYOUT:	TECHNICAL ☐	MIXED ☐	FAST ☐
TRACTION:	LOW ☐	MEDIUM ☐	HIGH ☐
ELECTRONICS			
SERVO:		ESC:	
BATTERY:		MOTOR/TIMING:	
NOTES:			
TIRES			
BRAND/TYPE F/R:			
ADDITIVE F/R:			
ADDITIVE TIMING F/R:			
WARMER° F/R:			
TRANSMISSION			
PINION:	SPUR:	 A2248D(Alu): ☐	
DIFF OIL CST:		OIL WEIGHT (quty.):	
BELT TENSION:		FRONT: 1 2 3 4 5 6 7	REAR: 1 2 3 4 5 6 7
SHOCK 'S		SHOCK CASE:	
FRONT:		REAR:	
PISTON:			
OIL:			
SPRING:			
LENGTH:			
ANTI ROLL BAR		FRONT:	
FRONT:		REAR:	
OPTIONAL WEIGHT			
A2423	A2424	A2425	A2704
			
A2705			
			
BODYSHELL			
TYPE:		WING TYPE:	
WING POS:		OVERALL WEIGHT:	
STIFFENER: ☐ 			

FRONT SUSPENSION

A2158 FRONT BRACE ☐

FF (mm)
FR (mm)

☐ A2148
☐ A2148-H
☐ ACTIVE
☐ FIXED

SHIM (mm) CASTER (°) SHIM (mm)

NO BODY STOP ☐

SHIM UNDER A2435C (mm)

STEERING ANGLE OUTSIDE

INSIDE

SHIM (mm)

HEX (mm) CAMBER (°)

SHIM (mm) TOE (°)

RIDE HEIGHT (mm)

DOWNSTOP (mm)

STEERING ROD POSITION ☐ ☐ ☐

A2147F ☐
A2467F (-1mm) ☐

REAR SUSPENSION

RR (mm)
RF (mm)

☐ A2148
☐ A2148-H
☐ ACTIVE
☐ FIXED

SHIM (mm) CASTER (°) SHIM (mm)

ROD POSITION

SHIM (mm)

HEX (mm)

SHIM (mm)

CAMBER (°)

TOE-IN (°)

RIDE HEIGHT (mm)

DOWNSTOP (mm)

INSIDE ☐
OUTSIDE ☐

A2530 (ALU) ☐

CHASSIS/FLEX/WEIGHT DISTRIBUTION

A2414: ☐
A2415: ☐
A2434: ☐

F/R DISTRIBUTION

Gr Gr

H2412 (18g) ☐

Gr Gr

BATTERY POSITION Fr ☐ Rr ☐

A2419 ☐

OVERALL WEIGHT (Grs)

1° 0' 0" ± 5
3

MM SCREW 1 2 3 4
± 0.0%

UPPERDECK SETTING

A2158 CUTTING FRONT: A2170: CUTTING REAR: A2158

MM FLEX SETTING:

A2166: ☐

OTHER UPPERDECK:

COMMENTS: