

MTC2R SETUP SHEET

NAME: _____ DATE: _____

TRACK: _____ RACE: _____

TRACK SURFACE: CARPET ASPHALT

LAYOUT: TECHNICAL MIXED FAST

TRACTION: LOW MEDIUM HIGH

ELECTRONICS

SERVO: _____ ESC: _____

BATTERY: _____ MOTOR/TIMING: _____

NOTES: _____

TIRES

BRAND/TYPE F/R: _____

ADDITIVE F/R: _____


ADDITIVE TIMING F/R: _____

WARMER° F/R: _____

TRANSMISSION

PINION: _____ SPUR: A2248D(Alu):

DIFF OIL CST: _____ OIL WEIGHT (qty.): _____

BELT TENSION:  FRONT: 1 2 3 4 5 6 7 REAR: 1 2 3 4 5 6 7

SHOCK'S FRONT: _____ REAR: _____

SHOCK CASE: _____

PISTON: _____

OIL: _____

SPRING: _____

LENGTH: _____

ANTI ROLL BAR FRONT: _____ REAR: _____

OPTIONAL WEIGHT


A2423 A2424 A2425 A2704 A2705

BODYSHELL

TYPE: _____ WING TYPE: _____

WING POS: _____ OVERALL WEIGHT: _____

STIFFENER:

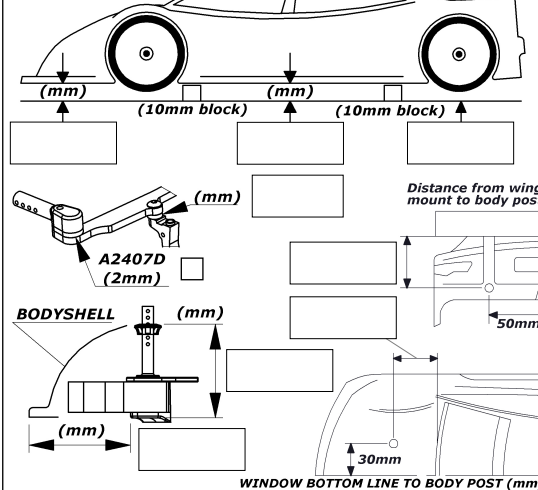

Distance from wing mount to body post

A2407D (2mm)

BODYSHELL (mm)

WINDOW BOTTOM LINE TO BODY POST (mm)

FRONT SUSPENSION

FF (mm) _____ FR (mm) _____

SHIM (mm) _____ CASTER (°) _____ SHIM (mm) _____

A2148 A2148-H ACTIVE FIXED

NO BODY STOP

SHIM UNDER A2435C (mm) _____

HEX (mm) _____ CAMBER (°) _____

SHIM (mm) _____ TOE (°) _____

RIDE HEIGHT (mm) _____

INSIDE OUTSIDE

FRONT BRACE

SERVORHORN (mm) _____ DOWNSTOP (mm) _____

STEERING ROD POSITION

A2147F A2467F (-1mm)

REAR SUSPENSION

RR (mm) _____ RF (mm) _____

SHIM (mm) _____ CASTER (°) _____ SHIM (mm) _____

A2148 A2148-H ACTIVE FIXED

RIDE HEIGHT (mm) _____

INSIDE OUTSIDE

RR (mm) _____ RF (mm) _____

A2529 (ALU) A2530 (ALU)

DOWNSTOP (mm) _____

ROD POSITION

SHIM (mm) _____ HEX (mm) _____ SHIM (mm) _____

CAMBER (°) _____ TOE-IN (°) _____

CHASSIS/FLEX/WEIGHT DISTRIBUTION

F/R DISTRIBUTION

A2414: A2415: A2434:

Gr _____ Gr _____

H2412 (18g)

Gr _____ Gr _____

BATTERY POSITION

Fr _____ Rr _____

A2419

1 2 3 4 MM SCREW

OVERALL WEIGHT (Grs) _____

UPPERDECK SETTING

A2170: _____

CUTTING FRONT: _____

MM FLEX SETTING: _____

CUTTING REAR: _____

A2166: _____

OTHER UPPERDECK: _____

COMMENTS: _____