



MTS-FFV3M

SET-UP SHEET

DRIVER	Kimi Yam	COUNTRY	Hong Kong	WEATHER	Sunshine	TEMPERATURE	35°C
TRACK	TRC	TRACK PAVEMENT	☒ DRY ☐ DAMP ☐ WET			TRACTION	☐ HIGH ☒ MEDIUM ☐ LOW
LAP SPEED		RANKING		WEIGHT		DATE	

FRONT	SHOCK	REAR
TP50	OIL	TP50
Race OPT 2.5~3.0T (Red/Black)	SPRING	MTS Siliver
	LENGTH	

FRONT	PISTON	REAR
☐	☒ 2.0mm 0 HOLES	☐
☐	☐ 2.0mm 1 HOLES	☐
☒	☐ 2.0mm 2 HOLES	☒
☐	☐ 2.0mm 3 HOLES	☐
☐	☐ 2.0mm 3 HOLES	☐

ANTI ROLL BAR					
FRONT	1.4	mm	REAR	no	mm

FRONT	DIFFERENTIAL	REAR
OIL	CROWN GEAR	OIL
	☐ NYLON	☐
1000000WTg	☐ METAL	☐ g
NO ☐	☒ STEEL	☐ NO ☐





ELECTRONICS & GEARING					
MOTOR PINION	104	T	SPUR GEAR	43	T
ESC	A				
MOTOR	3100kv	KV	T		

94mm ☒	BATTERY	139mm ☐	
mAh	C	g	V

WHEELBASE		
SHORT ☐	LONG ☐	mm

TYRE	
FRONT	REAR

36RVS spoke wheel	36RVS spoke wheel
-------------------	-------------------

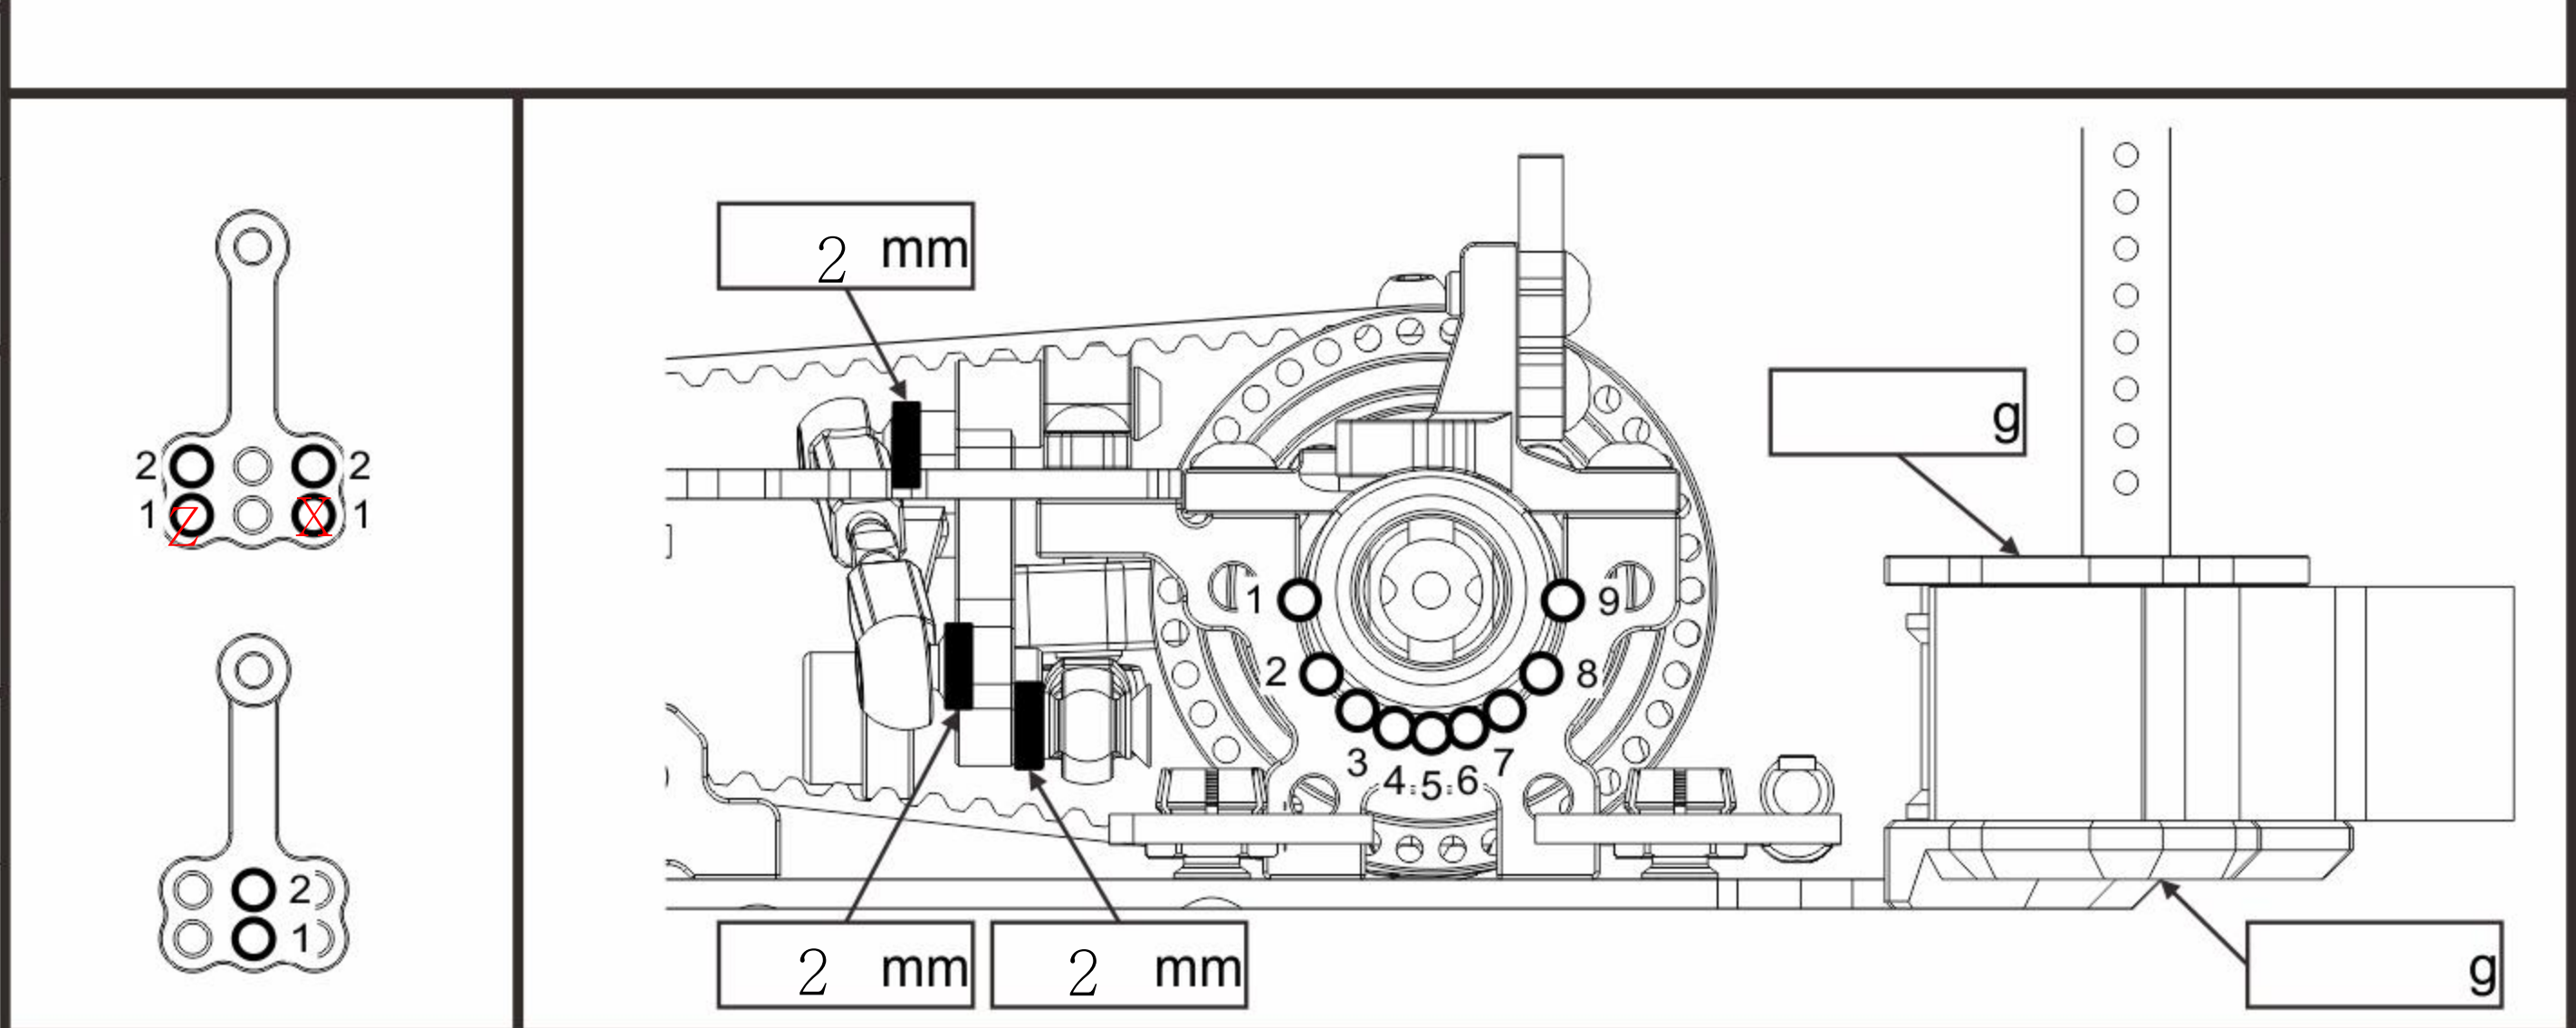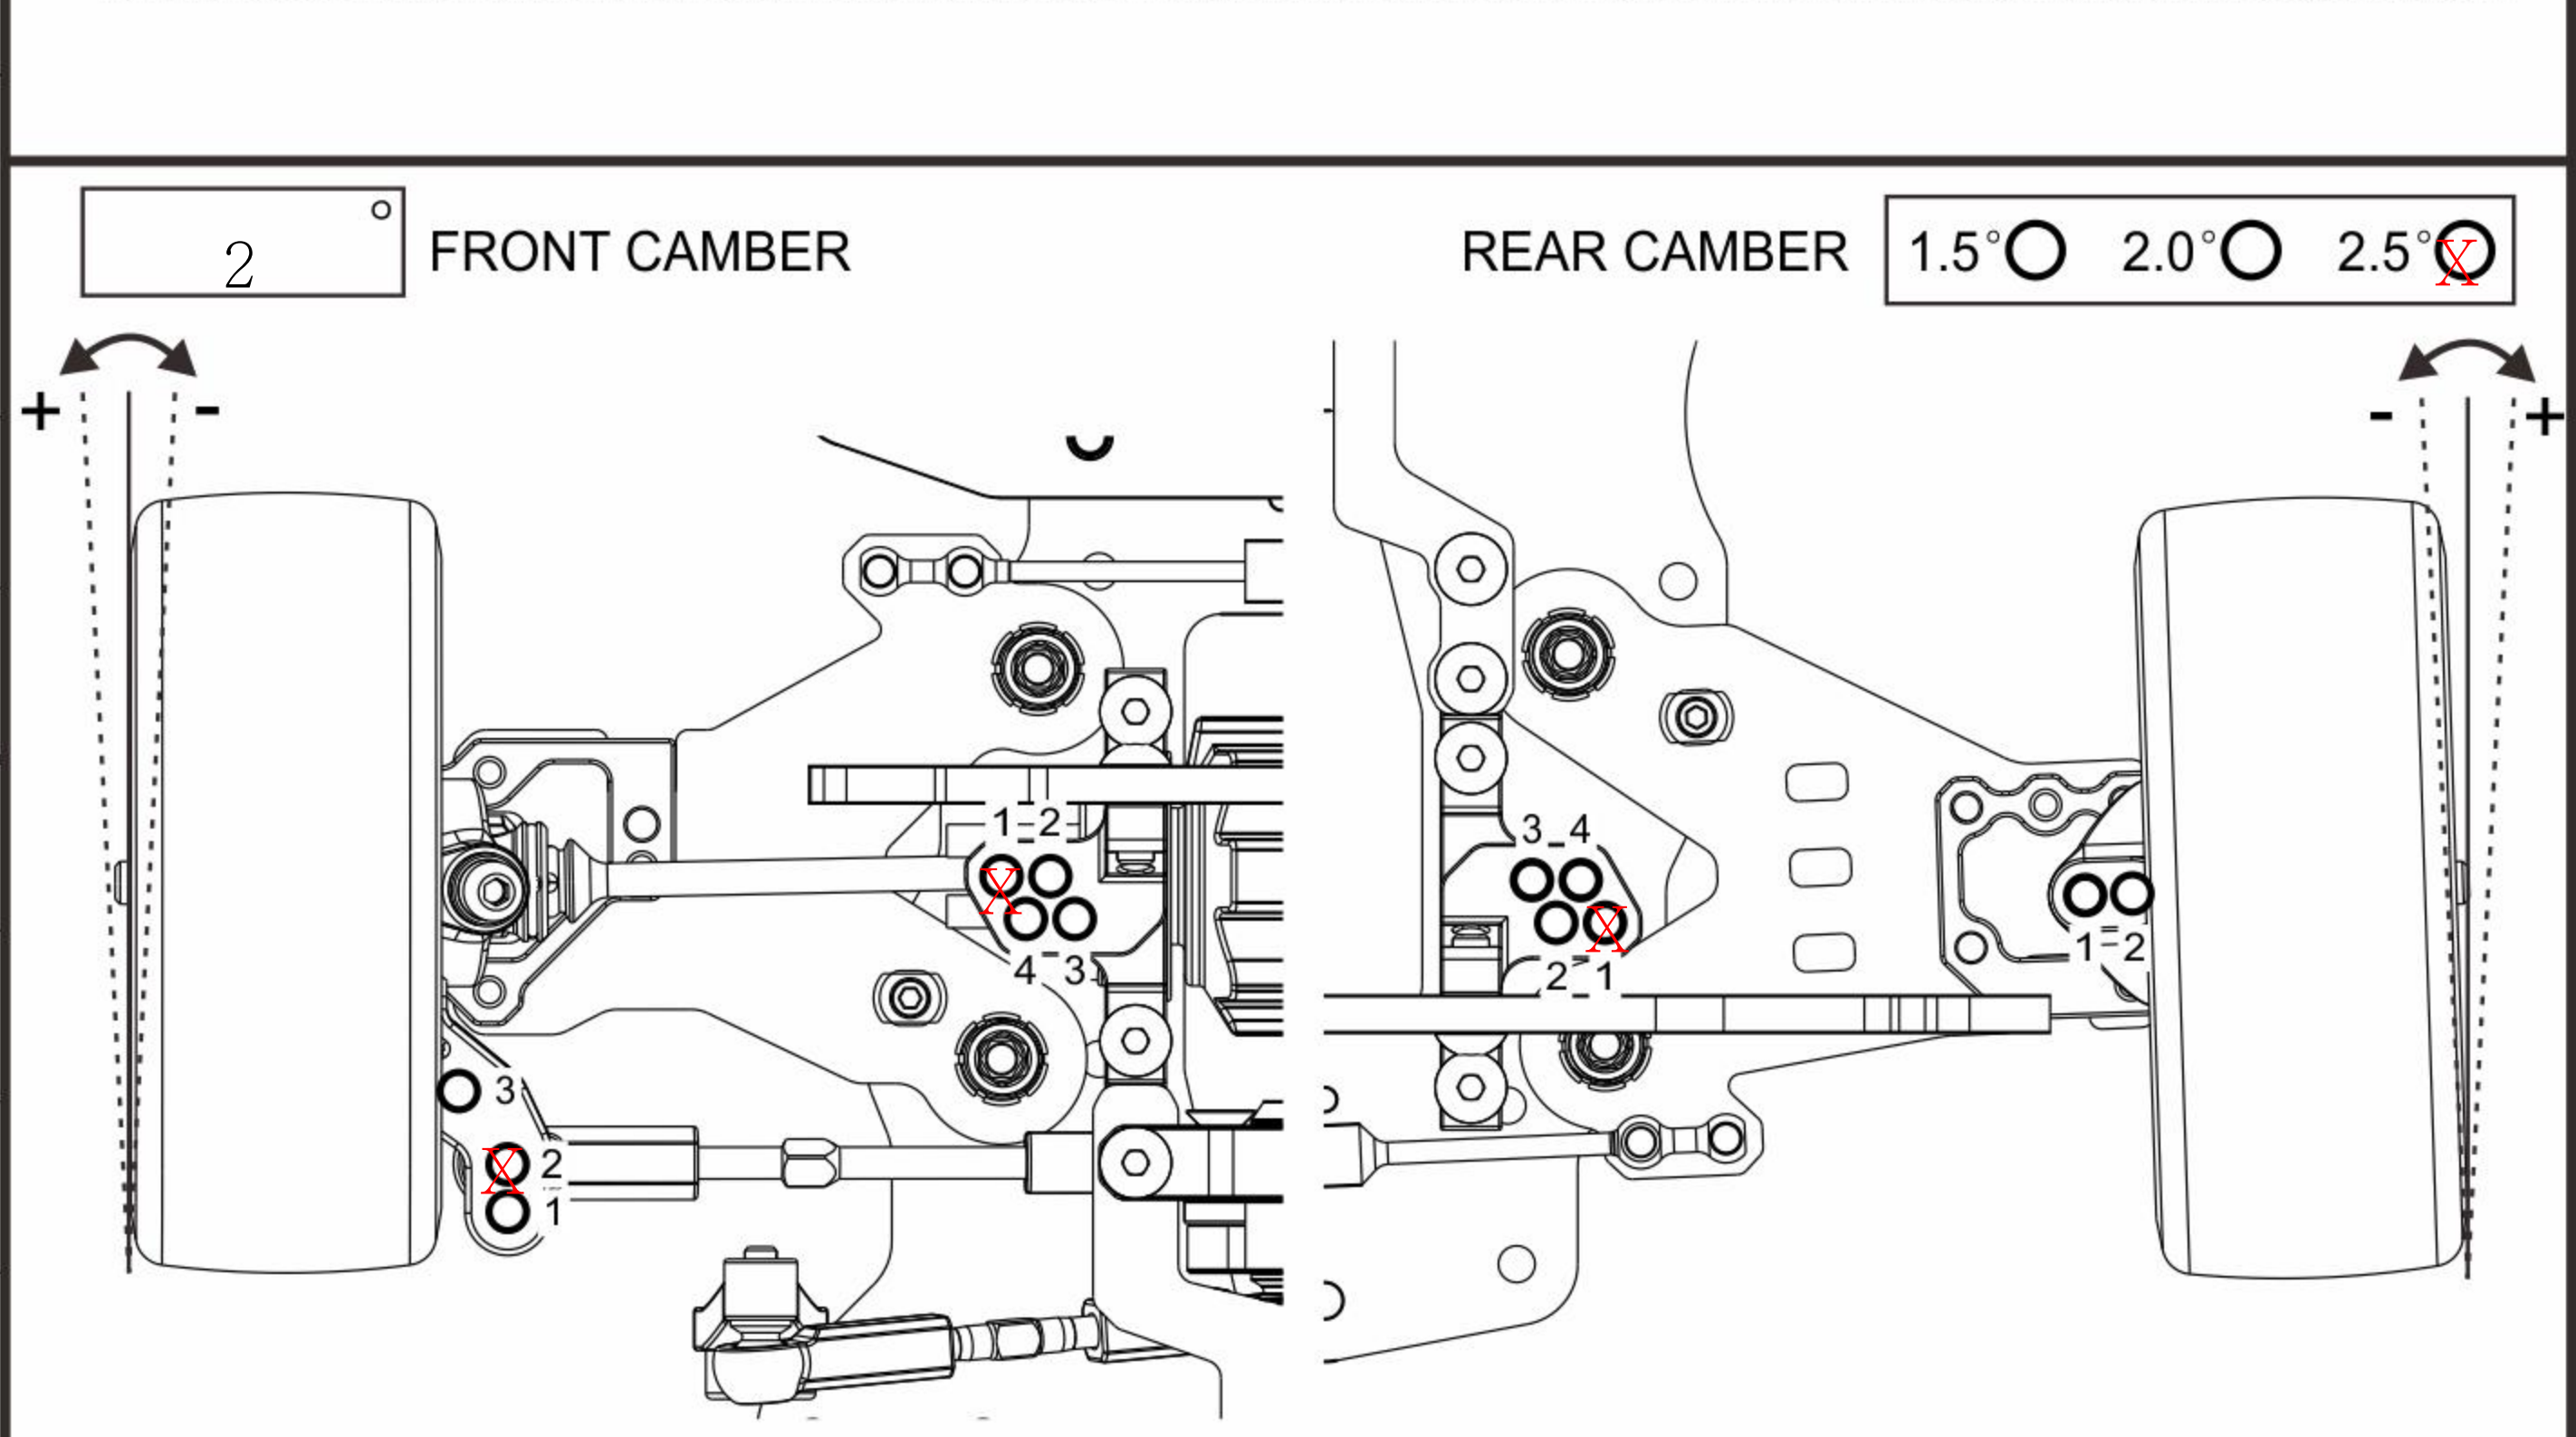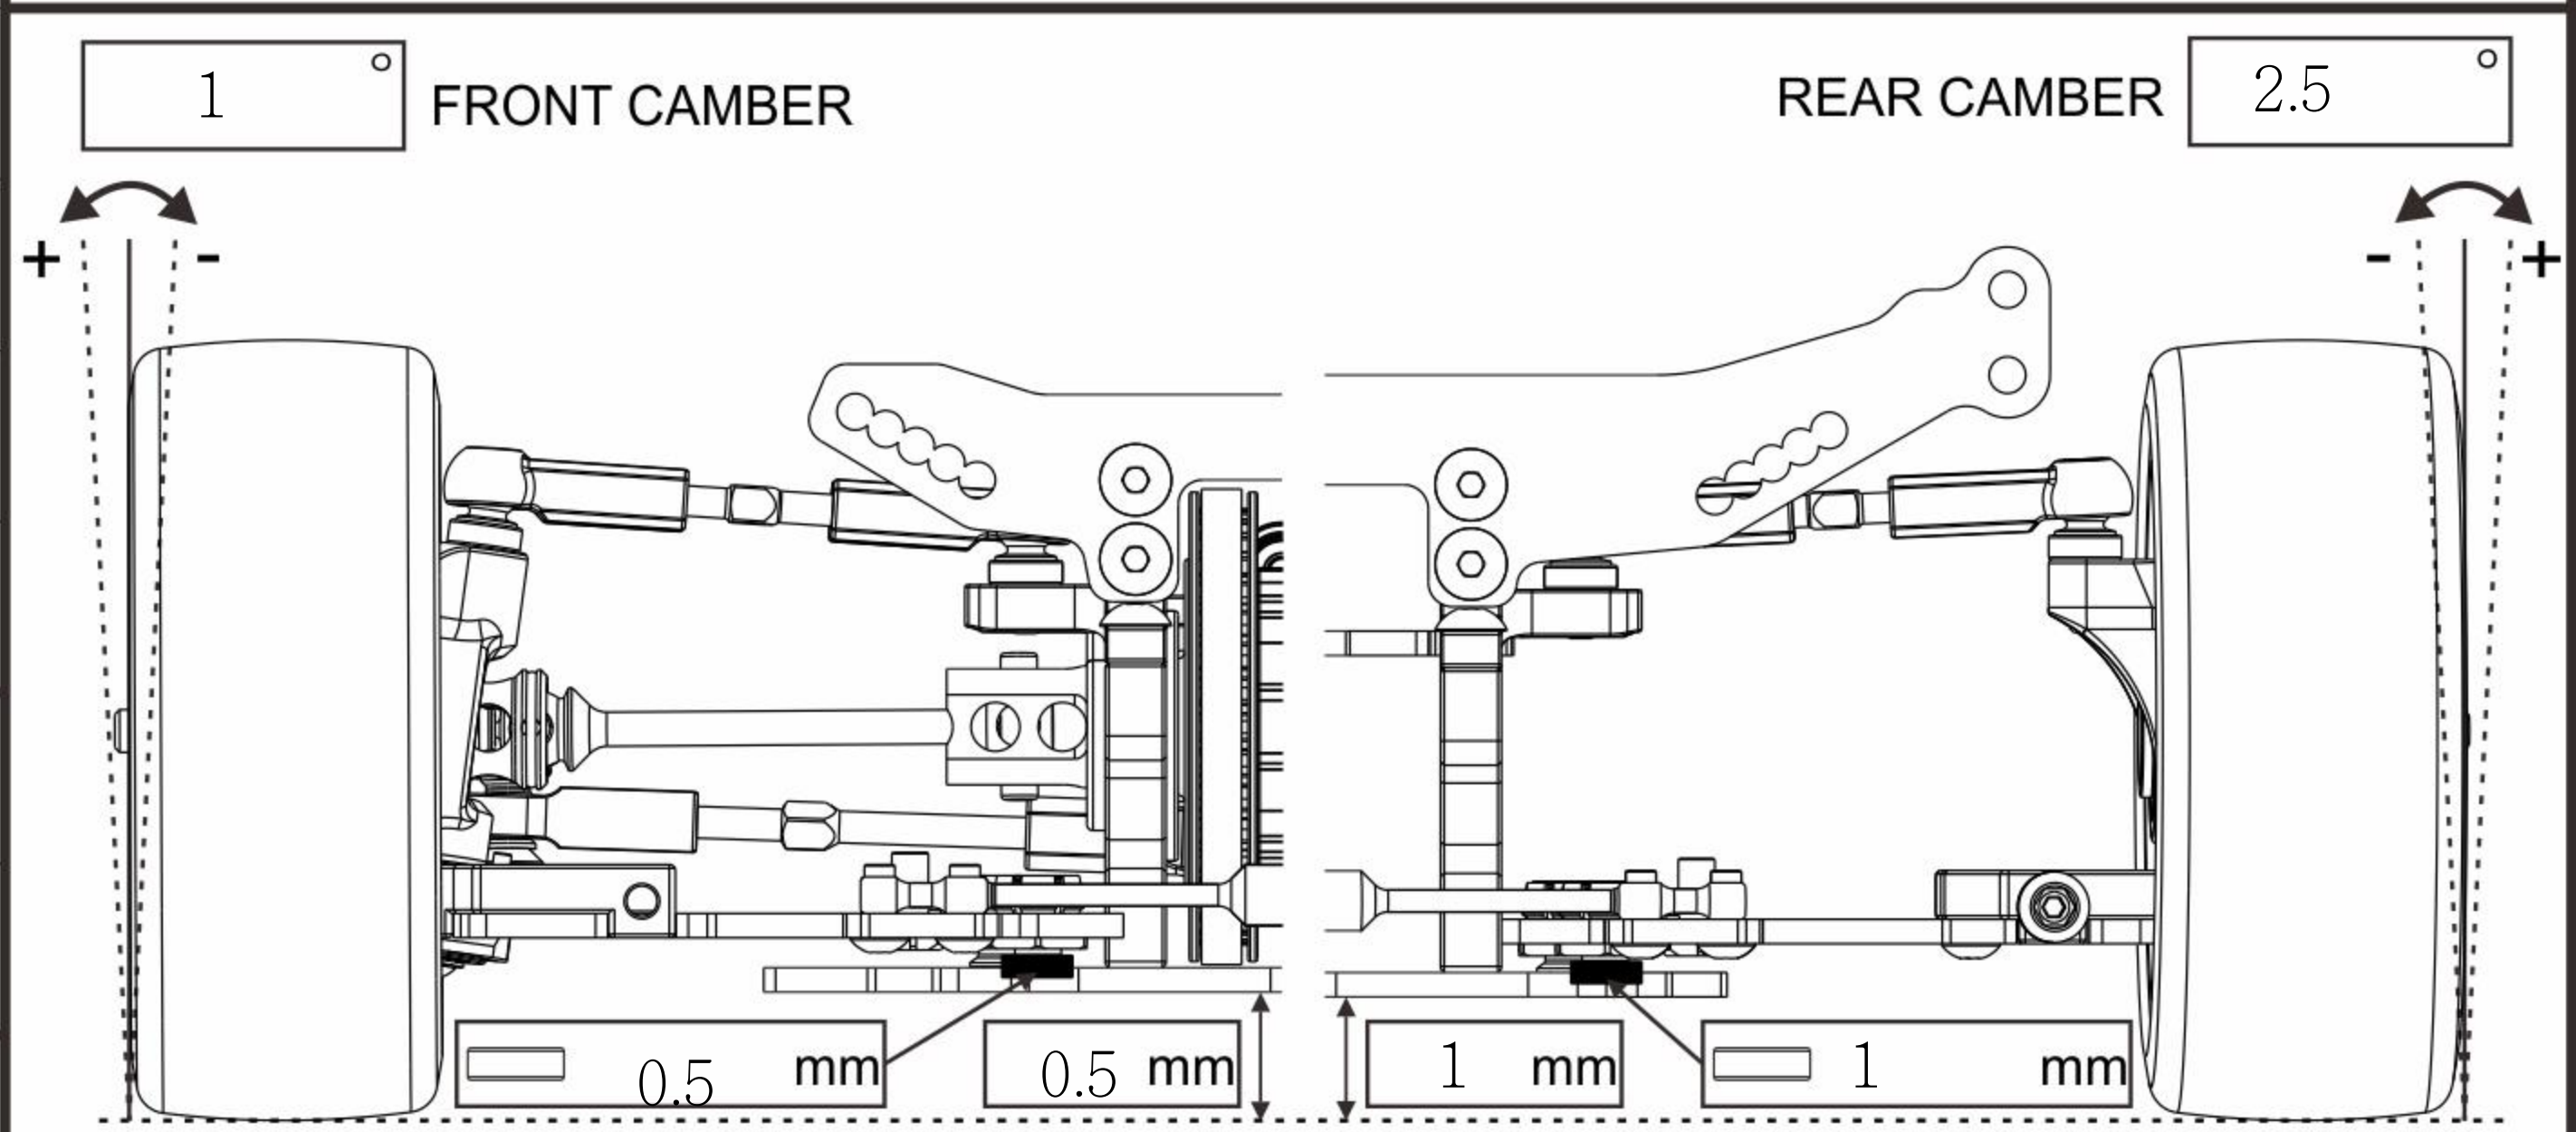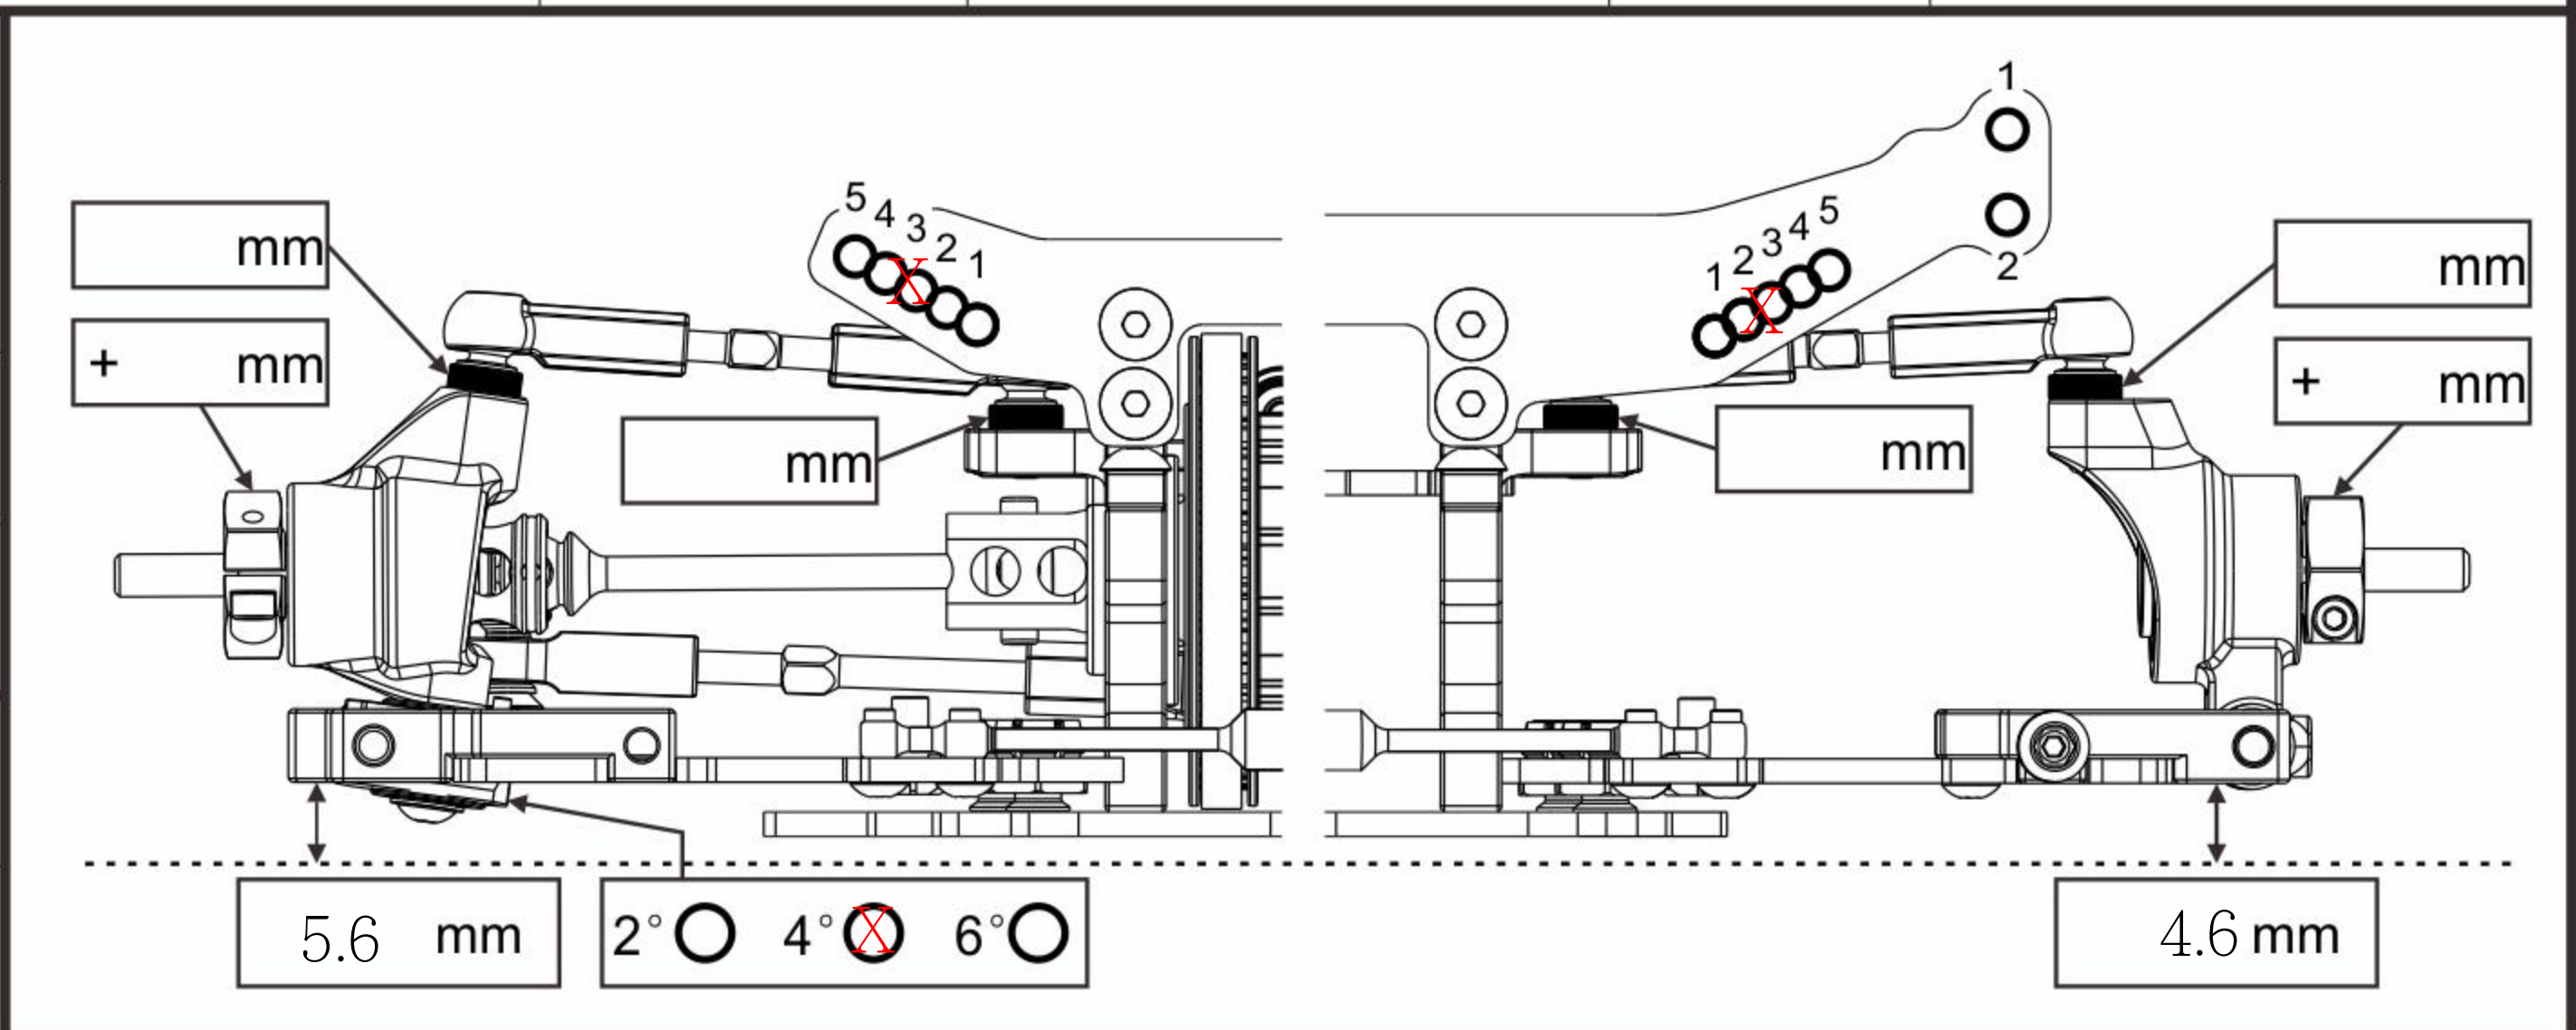

REMARKS:

