SP1 RCMAKER SETUP SHEET

DRIVER	Ryan Maker	CLASS	Modified	COMPOSITION	Asphalt	TRACK TEMP	60c
TRACK	TFTR	RESULT Q	4	F		LAYOUT	Technical	AIR TEMP	35c
EVENT	RCRA Nationals	BEST LAP	15.619	SURFACE	Ground Aspha	COMMENTS	
DATE		BEST RUN	19	LAPS	5:02	TRACTION	Low-Medium		

TRANSMISSION

FRONT		REAR
SPOOL ☑	DIFF OIL	7000 cst
DIFF ☐		
OIL	cst	

SPUR 112 PINION 29 FDR 7.3

SHOCKS

FRONT		REAR
C2.2	SPRING	C2.7
375 cst ☑ wt ☐	OIL	425 cst ☑ wt ☐
☐ MACHINED 4x1.1	PISTON	4x1.1 ☐ MACHINED
☑ HOLE IN CAP 0 mm	REBOUND	0 mm ☑ HOLE IN CAP
☐ PROGRESSIVE ☑ LINEAR	BODY	☑ LINEAR ☐ PROGRESSIVE
7.6 mm	LENGTH	8 mm

TIRES

TIRES	Solaris 36		
ADDITIVE	RC MAKER ATS		
ADDITIVE TIME	Fr 15 min/Rr	15 min	
WARMER TIME	Fr 10 min/Rr	10 min	
WARMER TEMP	Fr 60 deg/Rr	60 deg	

BODY

TYPE	Xtreme Twister Speciale		
WEIGHT	0.4		
WING	MR33 Twister Curved 0.5		
POSITION WINDSCREEN TO FRONT POST HOLE	62 mm	HEIGHT GROUND TO TOP OF REAR WING	mm

ELECTRONICS

SERVO	MKS HBL575SL X6
ESC	Hobbywing G3
MOTOR	Hobbywing G3
BATTERY	GensAce 6100 Redline

NOTES

Used 4030 ball stud on front rocker for high
than what can be achieved with the kit balls

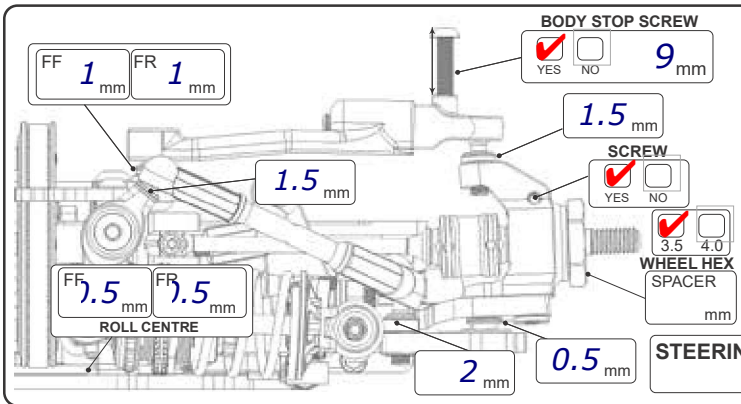

FRONT

CAMBER	1.75 deg
TOE OUT	1 deg
RIDE HEIGHT	5.2 mm
DROOP ☐ ARM ☑ AXLE	23 mm
DIFF HEIGHT ☑ HIGH ☐ LOW	
ANTI-ROLL BAR	1.1 mm
STEERING ANGLE	IN 27 OUT 17

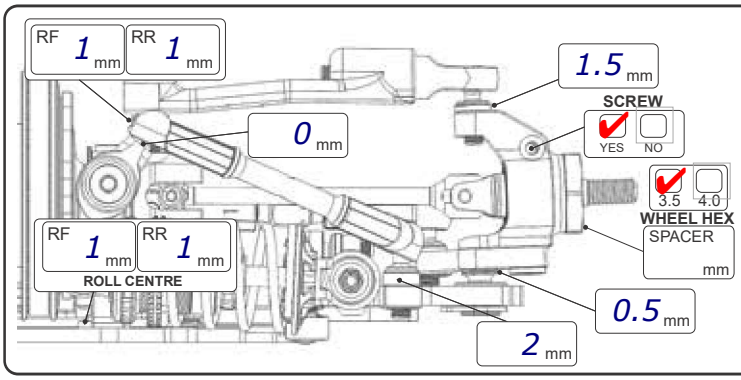

REAR
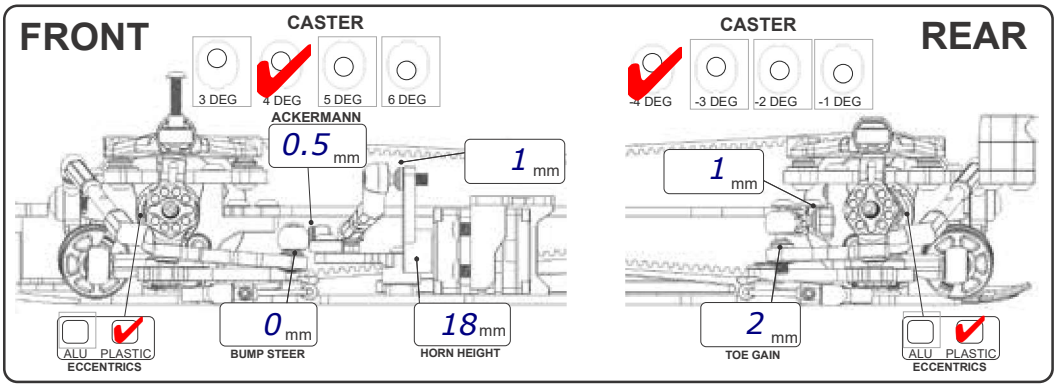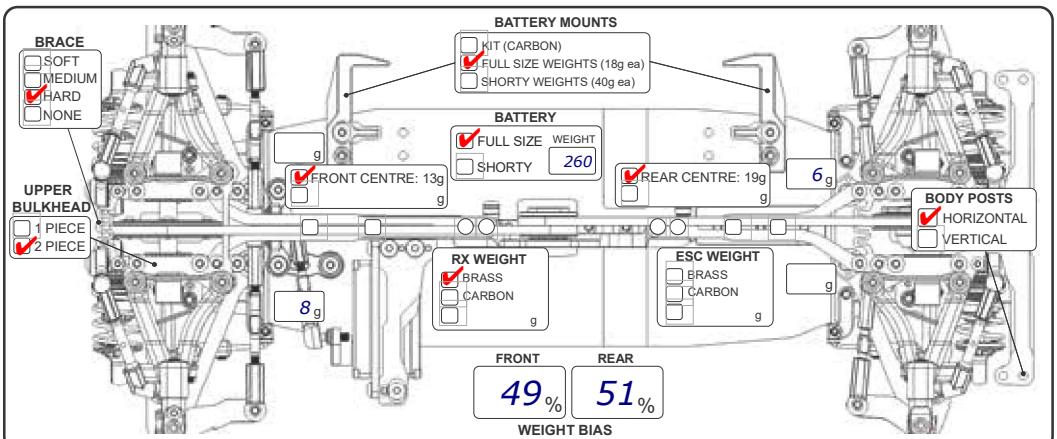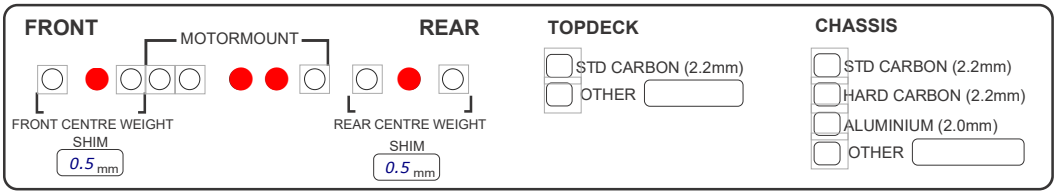
CAMBER	2 deg
TOE IN	3 deg
RIDE HEIGHT	5.4 mm
DROOP ☐ ARM ☑ AXLE	22 mm
DIFF HEIGHT ☑ HIGH ☐ LOW	
ANTI-ROLL BAR	1.0 mm