




Driver:	Airtemp:	Size:	☐ Open	☐ Med.	☐ Tight
Date:	Humidity:	Traction:	☐ High	☐ Med.	☐ Low
Track:	Track temp:	Surface:	☐ Smooth	☐ Med.	☐ Bumpy

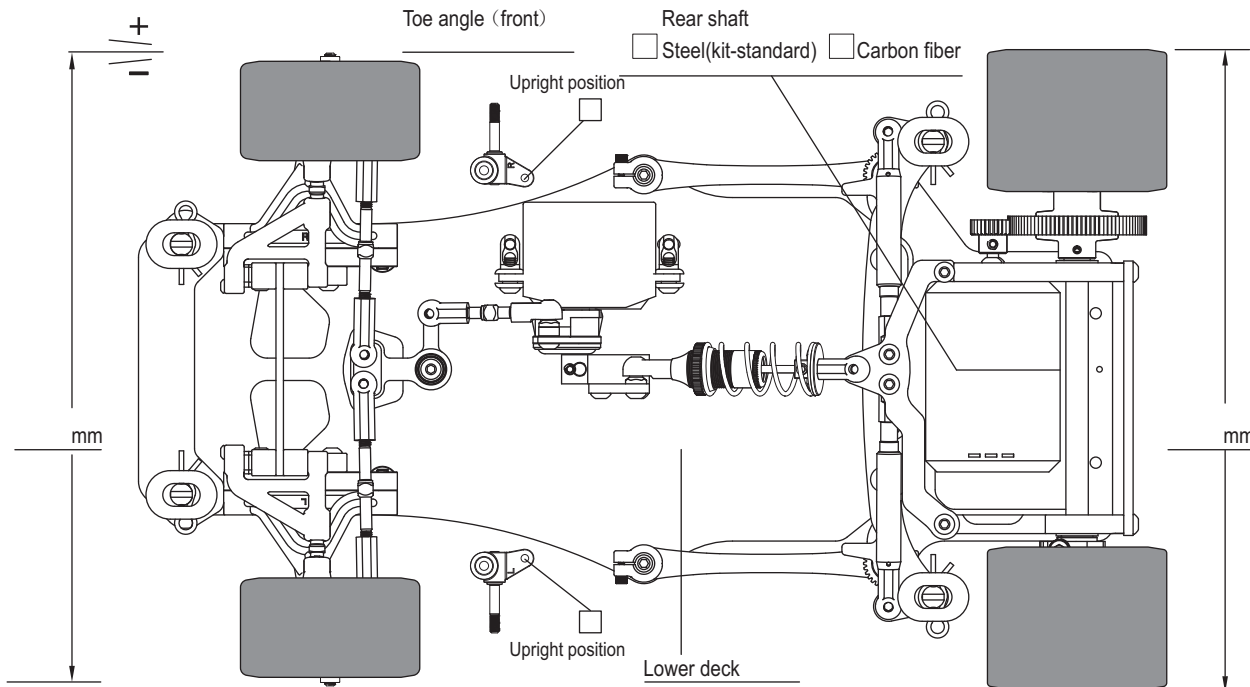

《Front》


- ☐ 0.5mm
☐ 1.0mm
☐ 2.0mm

Wheel Base

- ☐ Short ☐ Mid ☐ Long

- FR shim ☐ 1.80° Thick ☐ Thin
 RR Shim ☐ 3.25° Thin ☐ Thick

- ☐ 6.15° --- Thick, Thin
☐ 10° ☐ 5° ☐ 0°




Ground clearance

mm

《Front spring》

- ☐ Soft(gold)
☐ Medium(silver)
☐ Hard(black)



《Damper》

Coil spring

Roll damper


- ☐ Soft(gold)
☐ Medium(silver)
☐ Hard(black)



《Rear》


Spacer mm

Spacer mm

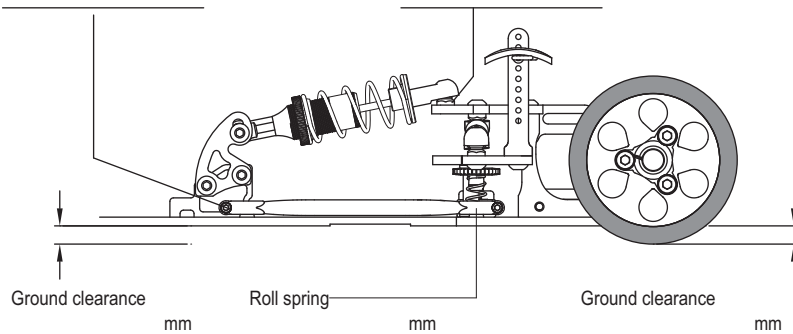


《Rear ground clearance》

- ☐ Super(black)
☐ Soft(black)
☐ Medium(black)
☐ Hard(gold)
☐ Harder(silver)
☐ Hardest(black)



Hole Position

- ☐ Top
☐ Bottom

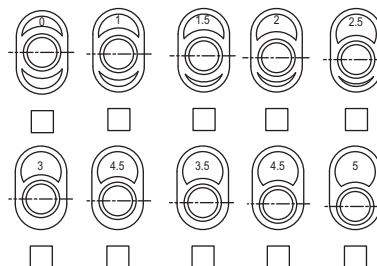

Motor	Spur gear	T	Pinion gear	T
Front wheel	Front tire		Front tire diameter	mm
Rear wheel	Rear tire		Rear tire diameter	mm
Body	Front wing		Rear wing	
Battery	Best lap			
Memo				