





Driver:	Airtemp:	Size:	☐ Open	☐ Med.	☐ Tight
Date:	Humidity:	Traction:	☐ High	☐ Med.	☐ Low
Track:	Track temp:	Surface:	☐ Smooth	☐ Med.	☐ Bumpy

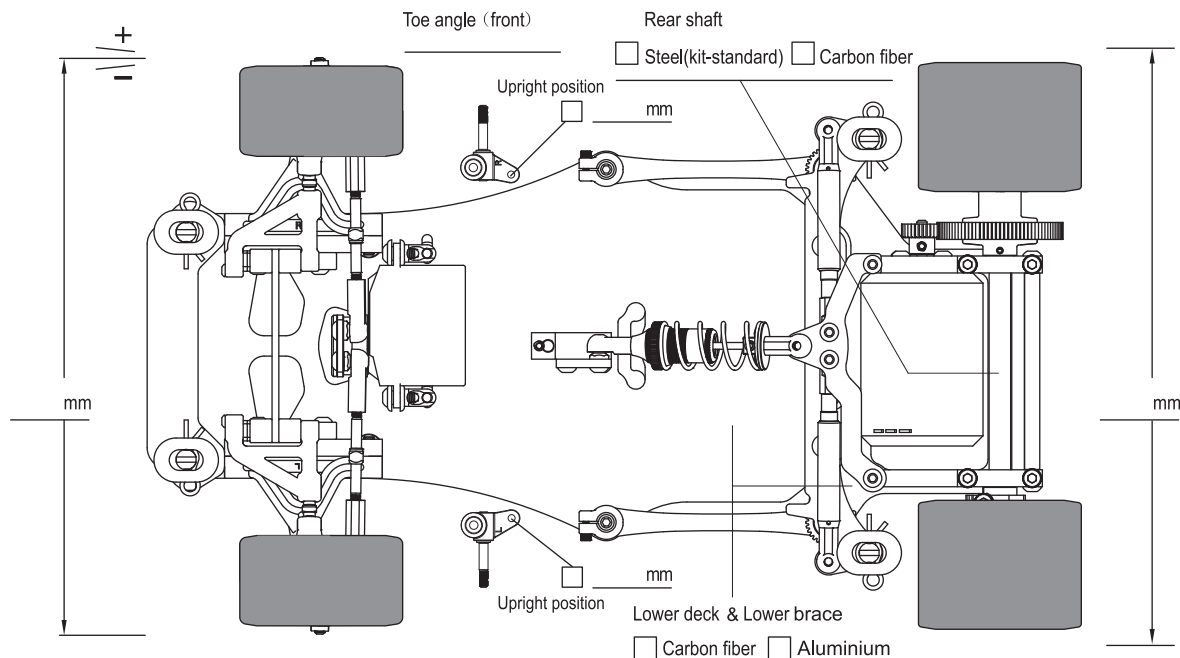

《Front》

- ☐ 0.5mm
- ☐ 1.0mm
- ☐ 2.0mm
- ☐ 5.0mm

- FR shim RR Shim
- ☐ 1.80° Thick Thin
 - ☐ 3.25° Thin Thick
 - ☐ 6.15° --- Thick, Thin
 - ☐ 10°
 - ☐ 5°
 - ☐ 0°
- Front Shim Rear Shim




Ground clearance mm

《Front spring》


- ☐ Soft(gold)

- ☐ Medium(silver)
- ☐ Hard(black)

- ☐ Hard
- ☐ Hard
- ☐ Medium
- ☐ Soft



《Rear》

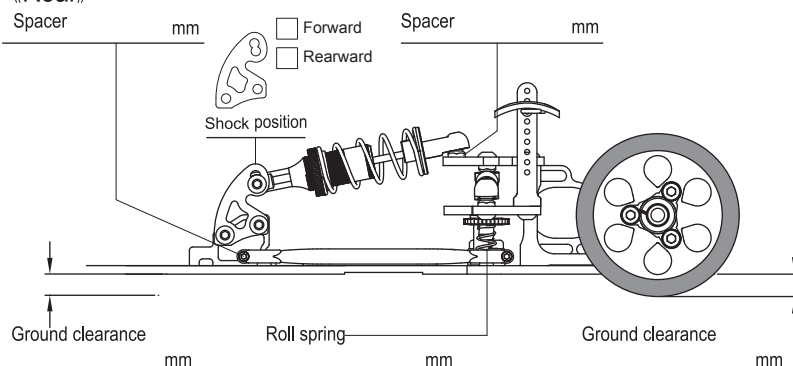


《Rear ground clearance》


- ☐ Super(black)
- ☐ Soft(black)
- ☐ Medium(black)
- ☐ Hard(gold)
- ☐ Harder(silver)
- ☐ Hardest(black)

- ☐ 0.25mm
- ☐ 0.5mm

- ☐ 0.5mm
 - ☐ 1.0mm
 - ☐ 2.0mm
- Rear tire width



《Damper》

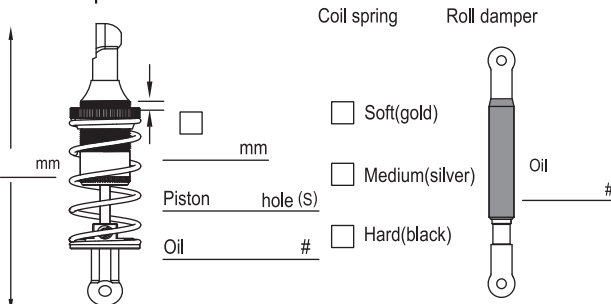

Motor	Spur gear	T	Pinion gear	T
Front wheel	Front tire		Front tire diameter	mm
Rear wheel	Rear tire		Rear tire diameter	mm
Body	Front wing		Rear wing	
Battery	Best lap			
Memo				