

Setup Sheet



DRIVER DETAILS

NAME	
DATE	
EVENT	
LOCATION	
RACE RESULT	
QUALIFYING POSITION	
FASTEST LAP TIME	

NOTES

TRACK CONDITIONS

GRIP LEVEL	High ☐	Medium ☐	Low ☐
TYPE	Tight ☐	Mixed ☐	Open ☐
SURFACE			
CONDITION	Smooth ☐	Bumpy ☐	
TRACK DIMENSIONS			
TEMPERATURE		°C	°F

MOTOR AND GEARING

MOTOR	
MOTOR OPTIONS	
ROTOR DIAMETER	
TIMING	
SPUR GEAR SIZE	
PINION SIZE	
ROLLOUT	mm / rev

TYRES AND ADDITIVE

	Front	Rear
COMPOUND		
FOAM DIAMETER	mm	mm
TYRE ADDITIVE		
ADDITIVE TIME	minutes	minutes
ADDITIVE COVERAGE	%	%
SIDEWALL GLUE	☐	☐


ELECTRICS AND BODYSHELL

BODYSHELL		HEIGHT	mm
E.S.C			
SERVO			
RECEIVER			
LiPo			


FRONT

CAMBER		degrees
RIDE HEIGHT		mm
RIDE HEIGHT SPACER	1.0mm ☐	1.5mm ☐ 2mm ☐
TOE OUT		degrees/side
DAMPING		cSt
DROOP		mm
FRONT END BRACE	O-ring ☐	Solid ☐ Removed ☐

REACTIVE CASTER




SPACER.....mm




STATIC CASTER

	FRONT	REAR	STATIC CASTER
☐	1.5mm	0mm	2.5°
☐	1mm	0.5mm	4.0° (kit)
☐	0.5mm	1mm	6.0°
☐	0mm	1.5mm	7.5°



UPPER ARM LENGTH




SPACER.....mm

FRONT TRACK WIDTH ADJUSTMENT

- ☐ -0.5mm
- ☐ 0.0mm
- ☐ +0.5mm

FRONT TRACK WIDTH INBOARD

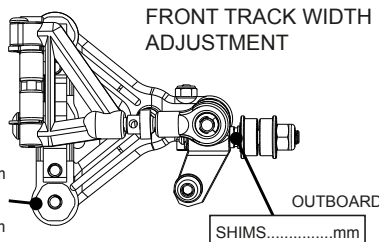



SHIMS.....mm

FRONT SPRINGS

- ☐ SUPER SOFT - U7013
- ☐ RED - U7015
- ☐ YELLOW - U7016
- ☐ BLUE - U7014
- ☐ SOFT - U7012
- ☐ MEDIUM SOFT - U7011
- ☐ MEDIUM - U7009
- ☐ HARD - U7010

REAR

RIDE HEIGHT		mm
ROLL DAMPING		cSt
BUMP DAMPING		cSt
DROOP		mm
ROLL CENTRE SHIFT	KIT ☐	+2.5mm ☐mm ☐
ANTI SQUAT	KIT ☐	ANTI SQUAT ☐
DIFF PRELOAD	360° KIT ☐	° ☐

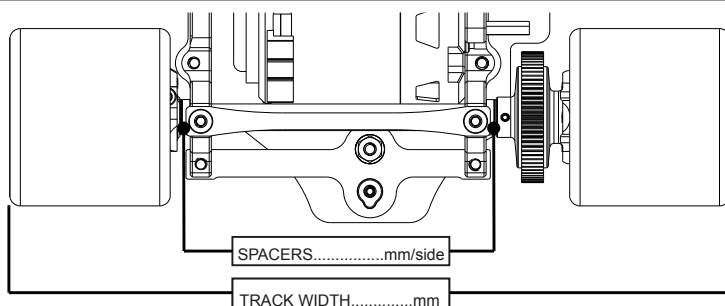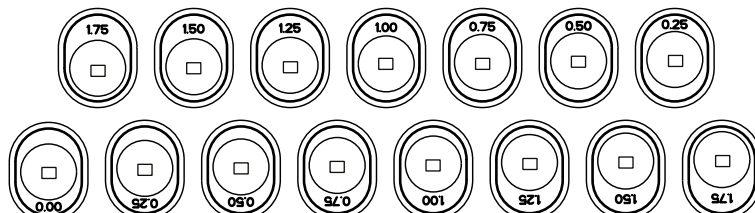

SPACERS.....mm/side

TRACK WIDTH.....mm

SOFTER	ROLL SPRINGS (SIDE)				HARDER
	U4838 BLACK	U4839 SILVER	U4840 GOLD	U4841 NICKEL	

SOFTER	BUMP SPRING (CENTRE)				HARDER
	U4838 BLACK	U4839 SILVER	U4840 GOLD	U4841 NICKEL	