

Setup Sheet

ECLIPSE 2
A NEW BEGINNING

DRIVER DETAILS

NAME	
DATE	
EVENT	
LOCATION	
RACE RESULT	
QUALIFYING POSITION	
FASTEST LAP TIME	

TRACK CONDITIONS


GRIP LEVEL	High ☐	Medium ☐	Low ☐
TYPE	Tight ☐	Mixed ☐	Open ☐
SURFACE			
CONDITION	Smooth ☐	Bumpy ☐	
TRACK DIMENSIONS			
TEMPERATURE	°C	°F	

MOTOR AND GEARING

MOTOR	
MOTOR OPTIONS	
ROTOR DIAMETER	
TIMING	
SPUR GEAR SIZE	
PINION SIZE	
ROLLOUT	mm / rev

NOTES

TOPDECK STIFFNESS ADJUSTMENT

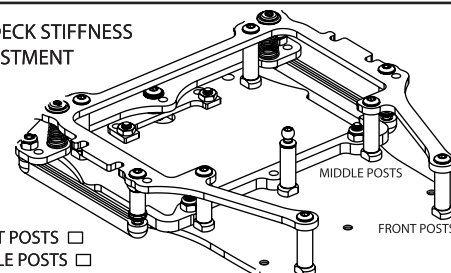

TYRES AND ADDITIVE

	Front	Rear
COMPOUND		
FOAM DIAMETER	mm	mm
TYRE ADDITIVE		
ADDITIVE TIME	minutes	minutes
ADDITIVE COVERAGE	%	%
SIDEWALL GLUE	☐	☐

ELECTRICS AND BODYSHELL


BODYSHELL	HEIGHT
FRONT PIN HEIGHT	BOTTOM 0 ☐ 1 ☐ 2 ☐ 3 ☐ 5 ☐ TOP
FRONT HANGERS	1 DOT ☐ 2 DOT ☐ 3 DOT ☐
REAR PIN HEIGHT	BOTTOM 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 ☐ TOP
REAR HANGERS	1 DOT ☐ 2 DOT ☐ 3 DOT ☐
E.S.C	
SERVO	
RECEIVER	
LiPo	

FRONT

CAMBER	0.75° ☐	1.5° ☐
RIDE HEIGHT	mm	
TOE OUT	degrees/side	
KINGPIN DAMPING	cSt	
DROOP	mm	
CASTER	WASHER A (REAR)	mm
	WASHER B (FRONT)	mm
	CASTER ANGLE	degrees

SILVER SHIMS X.....
BLACK SHIMS X.....

SILVER SHIMS X.....
BLACK SHIMS X.....





FRONT SPRINGS

- ☐ BLACK - SOFT
- ☐ SILVER - MEDIUM
- ☐ GOLD - HARD
- ☐ WHITE - ULTRA

Rear

RIDE HEIGHT	mm
ROLL DAMPING	cSt
BUMP DAMPING	cSt
DROOP	mm
ANTI SQUAT	KIT ☐ ANTI SQUAT ☐
DIFF PRELOAD	360° KIT ☐ ° ☐
PIVOT LENGTH	LONG ☐ SHORT ☐

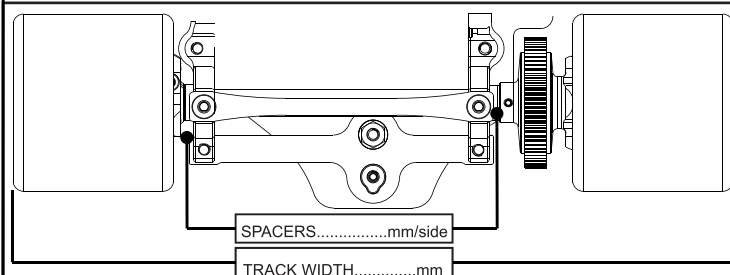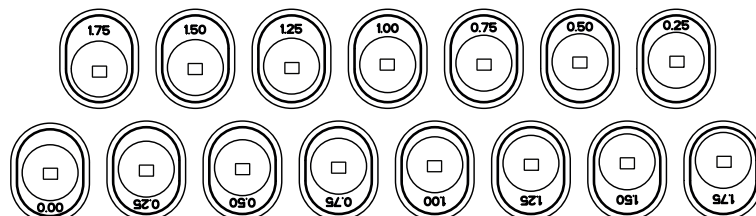

ROLL SPRINGS (SIDE)

SOFTER	U4838 BLACK ☐	U4839 SILVER ☐	U4840 GOLD ☐	U4841 NICKEL ☐	U7322 RED DOT ☐	U7323 BLACK ULTRA ☐	HARDER
--------	--------------------------------------	---------------------------------------	-------------------------------------	---------------------------------------	--	--	--------

BUMP SPRING (CENTRE)

SOFTER	U4838 BLACK ☐	U4839 SILVER ☐	U4840 GOLD ☐	U4841 NICKEL ☐	U7322 RED DOT ☐	U7323 BLACK ULTRA ☐	HARDER
--------	--------------------------------------	---------------------------------------	-------------------------------------	---------------------------------------	--	--	--------