

Driver: Andy Murray Track: Aldershot Event: National R2 BRCA 2024
 Date: 17/06/24 Qualifying: 1 Final: 1 Best Lap: 16.03

TRACK TYPE

Grip Level High Medium Low
 Type Tight Open Mixed
 Condition Flat Bumpy Mixed
 Surface Tarmac (Asphalt) Carpet
 Track Temp _____ °C
 Weather _____

Notes:

TYRES

Tyres Ride BRCA '2024' brand new
 Cleaner control
 Additive control
 Additive Time Front: 25 mins Rear: 25 mins
 Heating Time Front: 20 mins Rear: 20 mins
 Heating Temp Front: 60 °C Rear: 60 °C


Notes:

FRONT

KEY: CF = Carbon Fibre, AL = Aluminium, P = Plastic, F = Front, R = Rear
 H = High, L = Low, Y = Yes, N = No, V = Vertical, H = Horizontal

Ride Height 5.4 mm
 Camber 2.0 deg
 Droop 22.8 mm
 Castor 4.0 deg
 Toe -1.2 deg
 Anti Roll Bar 1.1 1.2 1.3 1.4
 Upper Link Mount 0 dot 1 dot
 Diff Height H L
 Diff Oil 2.5m cSt
 Servo Horn Height 18 mm Saver
 Steering Travel 24 in _____ out

Notes: shock in hole 2

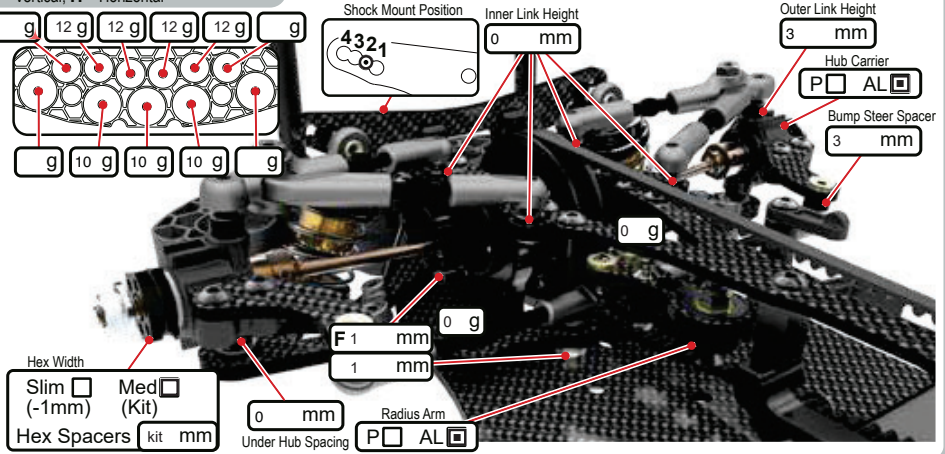

REAR



KEY: CF = Carbon Fibre, AL = Aluminium, P = Plastic, Ti = Titanium, F = Front, R = Rear
 H = High, L = Low, Y = Yes, N = No, V = Vertical, H = Horizontal

Ride Height 5.8 mm
 Camber 2.0 deg
 Droop 22.2 mm
 Castor 2.0 deg
 Toe 2 static deg
 Anti Roll Bar 1.1 1.2 1.3 1.4
 Upper Link Mount 0 dot 1 dot

Notes:

shocks in hole 2
 topdeck rear cross brace 2mm - test part
 topdeck out in the middle with dowels.

Hex Width Slim Med (-1mm) (Kit)
 Hex Spacers kit mm

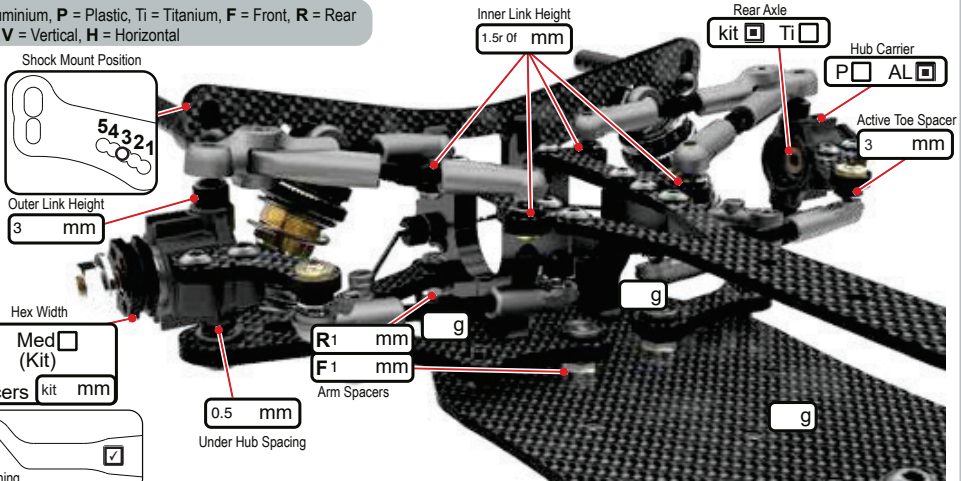

BODYSHELL

Body MT Civic L
 Wing Std Line - no end plates
 Wing Height 121 mm
 Front Height 7.4 mm
 Body Stopper Y N
 Stopper Height _____ mm
 Body Weight _____ g
 Rear Posts V H
 Body Offset Fwrd _____ mm
 Wing Offset Rwrld _____ mm

Notes:

CHASSIS

Chassis CF
 T Brace Y N
 Motor Mount Screws 1 2 3 4
 Rear Front
 Total Weight 1280 g
 Weight Distribution F _____ : R _____

Notes:

-all motor mount screws in
 -removed front motor mount screw

ELECTRONICS

E.S.C. Hobbywing control justock
 Servo Highest 750
 RX Sanwa
 LiPo aerox 5600
 Motor Hobbywing ets 17.5
 Rotor Dia. Std _____ mm
 Timing Fixed _____ deg
 Gear Pitch 48 64
 Pinion 60 _____ t
 Spur 92 _____ t
 Ratio _____

SHOCKS

KEY: x = Stroke, e = external
 V = Vented (Drilled), S = Sealed

FRONT REAR
 Cap Type V S V S
 Body Kit Kashima Coated
 Oil 400 cSt 400 cSt
 Piston 4x1.1 4x1.1
 Spring Core RC Black Core RC Grey
 Length (x) 9 mm 9 mm
 Rebound 1 mm 1 mm
 Limiters (e) No mm No mm

Notes: