

Driver: _____ Track: _____ Event: _____
Date: _____ Qualifying: _____ Final: _____ Best Lap: _____

TRACK TYPE

Grip Level ☐ High ☐ Medium ☐ Low ☐
Type ☐ Tight ☐ Open ☐ Mixed ☐
Condition ☐ Flat ☐ Bumpy ☐ Mixed ☐
Surface ☐ Tarmac (Asphalt) ☐ Carpet ☐
Track Temp _____ °C
Weather _____

Notes:

TYRES


Side Wall Glue Height Ø _____ mm
Tyres _____
Cleaner _____
Additive _____ Wet on track ☐
Additive Time Front: _____ mins Rear: _____ mins
Heating Time Front: _____ mins Rear: _____ mins
Heating Temp Front: _____ °C Rear: _____ °C

Notes:

FRONT

KEY: CF = Carbon Fibre, AL = Aluminium, P = Plastic, ST = Steel
F = Front, R = Rear


Ride Height _____ mm
Camber _____ deg
Droop _____ mm
Castor _____ deg
Toe _____ deg
Anti Roll Bar ☐ 1.1 ☐ 1.2 ☐ 1.3 ☐ 1.4 ☐
Upper Link Mount ☐ 0 Notch ☐ 1 Notch ☐ 2 Notch ☐
Spool Height ☐ ↑ ☐ ↓ ☐ U8777 +0.5mm Alloy Eccentric ☐ U9523 Low Trans Housing ☐
Servo Horn Height _____ mm Saver ☐
Steering Travel _____ in _____ out
Shock Mount Position ☐ Inboard ☐ Outboard ☐

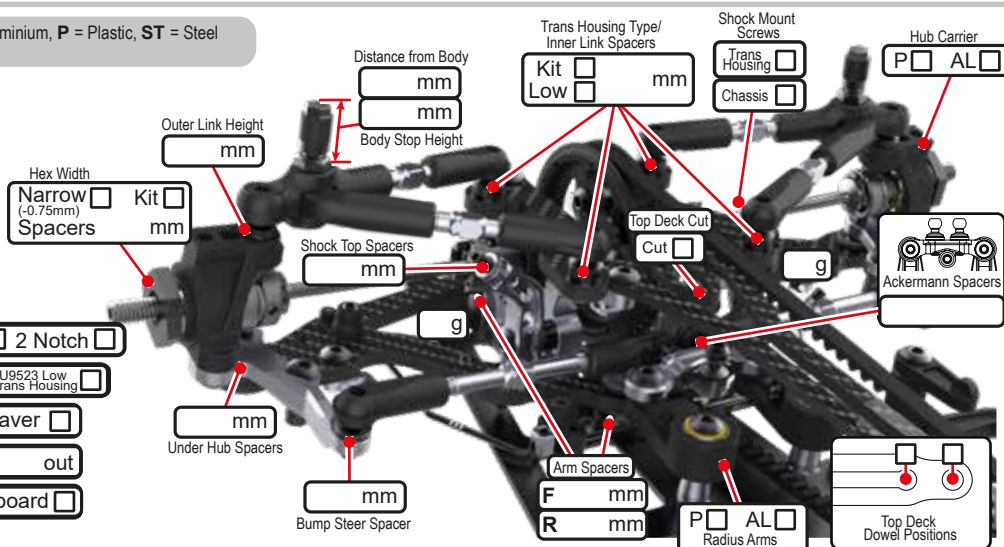

REAR

KEY: CF = Carbon Fibre, AL = Aluminium, P = Plastic, ST = Steel
F = Front, R = Rear

Ride Height _____ mm
Camber _____ deg
Droop _____ mm
Castor _____ deg
Toe _____ deg
Anti Roll Bar ☐ 1.1 ☐ 1.2 ☐ 1.3 ☐ 1.4 ☐
Upper Link Mount ☐ 0 Notch ☐ 1 Notch ☐ 2 Notch ☐
Diff Height ☐ ↑ ☐ ↓ ☐ U8777 +0.5mm Alloy Eccentric ☐ U9523 Low Trans Housing ☐
Diff Setting _____ cSt Diff Checker # _____ Warming ☐ Duration: _____
Shock Mount Position ☐ Inboard ☐ Outboard ☐

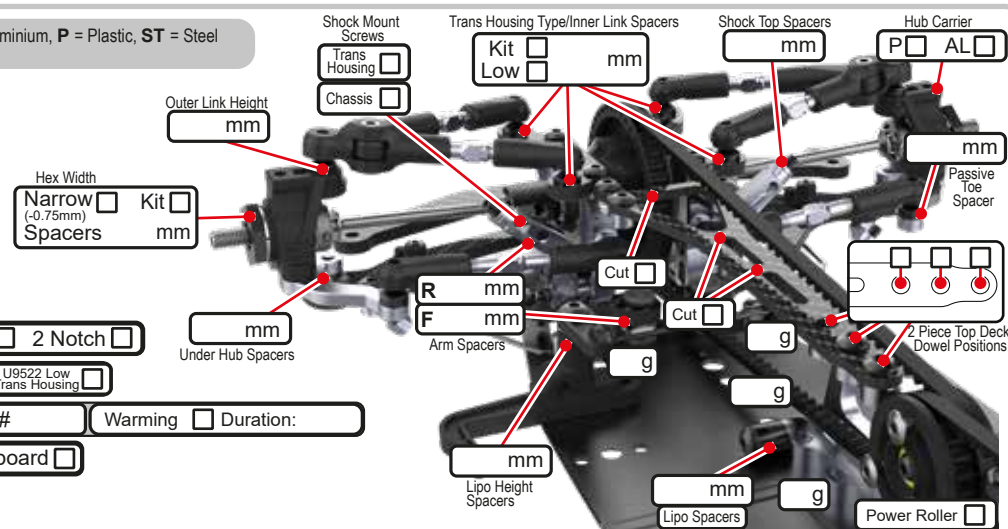

BODYSHELL

Body _____
Wing _____ End Plates ☐
Wing Height _____ mm ☐
Splitter Height _____ mm
Body Weight _____ g
Body Offset Fwrd _____ mm
Front Post ☐ 1dot ☐ 2dot ☐ 3dot Pin Hole ☐ 123456 ☐ 789012
Rear Post ☐ 1dot ☐ 2dot ☐ 3dot Pin Hole ☐ 123456 ☐ 789012
Type: _____
Notes:

CHASSIS

Chassis _____
ST ☐ CF ☐ AL ☐
Top Deck Options
1 Pc TITC U9550 ☐
Front 2 Piece C/F 1.6 ☐ C/F 2.0 ☐
Rear 2 Piece C/F 1.6 ☐ C/F 2.0 ☐
Motor Mount Screws R ☐ F ☐
PTFE Tape ☐ Total Weight _____ g
Weight Distribution _____ % g - Rear

ELECTRONICS

E.S.C. _____ + g
Servo _____
RX _____ + g
LiPo _____ + g
Motor _____ Spacers _____ mm
Rotor Dia. _____ mm
Timing _____ deg
Gear Pitch 48 ☐ 64 ☐
Pinion _____ t
Spur _____ t
Ratio _____

SHOCKS

KEY: x = Stroke, e = external

	FRONT	REAR
Spring	_____	_____
Oil	_____ cSt	_____ cSt
Piston	Kit ☐ _____	Kit ☐ _____
Length (x)	_____ mm	_____ mm
Rebound	_____ mm	_____ mm
Limiters (e)	_____ mm	_____ mm
Body	Kit ☐ _____	K-Coat U8770 ☐

Notes: