

Driver Details

NAME **Andy Murray**
 DATE **26/7/21**
 EVENT / TRACK **WLRC Clubmans R3**
 WEATHER **overcast/sunny- 20degrees Air~**
 RESULT **Tq + 1st**
 FASTEST LAP TIME **13.47**

Chassis and Electrics

CHASSIS Mid ☐ Alloy ☐ Carbon ☐
 TOP DECK Vertical ☐ Horizontal ☐
 BODYSHELL **special**
 WING
 E.S.C **Flow X brake strength 90%**
 SERVO **KO Propo RSX3 horn-17mm**
 RECEIVER **Sanwa RX481**
 LIPO **LRP 7400 G4**

Track Conditions

GRIP LEVEL High ☐ Medium ☒ Low ☐
 TYPE Tight ☐ Open ☐ Mixed ☒
 SURFACE Carpet ☐ Tarmac ☒
 CONDITION Smooth ☒ Bumpy ☐
 AIR TEMPERATURE **20 °C** °F TRACK TEMPERATURE **35 °C** °F
 VENUE Indoor ☐ Outdoor ☒

Motor and Gearing

MOTOR **17.5**
 ROTOR DIAMETER
 TIMING
 GEAR PITCH **48DP** ☒ 64DP ☐
 SPUR SIZE **69T CR511**
 PINION SIZE **34T**

NOTES

- Pivot Ball Suspension U8159
 - Anti Lozenge Topdeck U8138
 - Alloy Hub Carrier Black - Mi7 U7812
 - Lightweight foam bumper U7866
 - Wheel Hex Shims U4321

- Shock top spacing 3mm rear, 2.5mm front
 - 1mm under the hub carriers (std)



Wheels, Tyres and Inserts

WHEELS **brca**

TYRES


INSERTS

TYRE ADDITIVE **mr33 v3**

ADDITIVE TIME Front **12** Minutes Rear **12** Minutes

TYRE WARMERS Yes ☒ No ☐ Temp **65** °C Time **12** Minutes

Topdeck Options

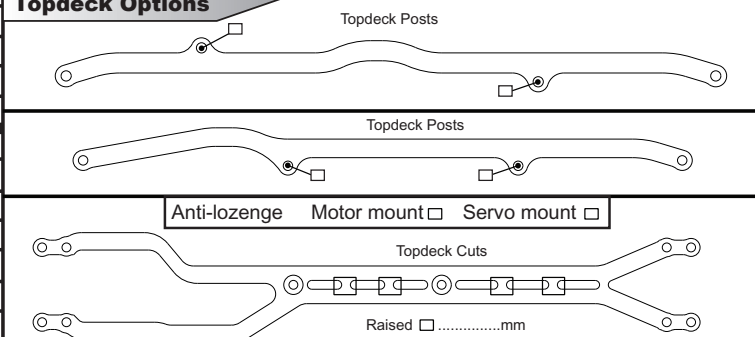

Front

☒ Spool
☐ Gear Diff
 Diff Oil cTs

Washers **0**mm

SERVO SAVER
 Yes ☐
 No ☒

Washers **2.5**mm

☐ Strap
☐ Split Block

Washers **3**mm

Washers **1**mm

☐ No Dot - 1.0mm
☐ 1 Dot - 1.1mm
☐ 2 Dot - 1.2mm - Kit
☒ 3 Dot - 1.3mm

☐ 53.0mm
☐ 53.5mm
☐ 54.5mm - Kit

☒ 0 Dot - Kit
☐ 1 Dot Front Hole
☐ 1 Dot Rear Hole

☐ 2 Dot
☐ 3 Dot Front Hole
☐ 3 Dot Rear Hole

Peripheral Damping
 Yes ☐
 No ☒

Cap Type Vented ☐ Sealed ☒ Emulsion ☐
 Oil **450**cTs

Spring **Core RC Purple 2.9**
 Piston **4 x 1.1mm drilled**
 Drilled Yes ☐ No ☐
 Drilled piston Hole Sizemm
 Shock Length (X) **11.5mm**mm
 Rebound **1mm**%

Rear

Diff Oil **3k** cTs

Washers **1.0**mm

Washers **3**mm

Washers **3**mm

☐ 53.0mm - Kit
☐ 53.5mm
☐ 54.5mm

☒ 0 Dot - Kit
☐ 1 Dot Front Hole
☐ 1 Dot Rear Hole

☐ 2 Dot
☐ 3 Dot Front Hole
☐ 3 Dot Rear Hole

Peripheral Damping
 Yes ☐
 No ☒

Cap Type Vented ☐ Sealed ☒ Emulsion ☐
 Oil **450**cTs

Spring **Core RC Purple 2.9**
 Piston **4 x 1.1mm drilled**
 Drilled Yes ☐ No ☐
 Drilled piston Hole Sizemm
 Shock Length (X) **11.5mm**mm
 Rebound **1mm**%

Drop **21.4**mm (on 1.6mm drop gauge spacer)
 Ride Height **5.4**mm
 Camber **2**°
 Toe **3.0-3.2**°
 Shims **1**mm