

Driver Details

NAME Chris Ashton
 DATE Jan 5th 2020
 EVENT / TRACK MICC Rd 3
 WEATHER
 RESULT Q8 F 9
 FASTEST LAP TIME

Chassis and Electrics

CHASSIS Mid ☐ Alloy ☐ Carbon ☐
 TOP DECK Vertical ☐ Horizontal ☐
 BODYSHELL DBX 0.5mm
 WING DBX 0.7mm
 E.S.C HW XR10 G2
 SERVO Highest
 RECEIVER KO
 LIPO Intellect 4200 Shorty

Track Conditions

GRIP LEVEL High ☐ Medium ☐ Low ☐
 TYPE Tight ☐ Open ☐ Mixed ☐
 SURFACE Carpet ☐ Tarmac ☐
 CONDITION Smooth ☐ Bumpy ☐
 AIR TEMPERATURE °C °F TRACK TEMPERATURE °C °F
 VENUE Indoor ☐ Outdoor ☐

Motor and Gearing

MOTOR HW 4.5
 ROTOR DIAMETER 12.3
 TIMING 28
 GEAR PITCH 48DP ☐ 64DP ☐
 SPUR SIZE 87
 PINION SIZE 22

NOTES

Shorty in middle position.
 2 x LRP 59g full length under LiPo weight.
 Core titanium screws.
 10g under steering rack.
 5g in front of servo.
 5g in centre.
 MR33 servo horn 18mm
 Low profile ball grippa's



Wheels, Tyres and Inserts

WHEELS

TYRES Volante 28


INSERTS

TYRE ADDITIVE CS High Grip

ADDITIVE TIME Front 10 Minutes Rear 10 Minutes

TYRE WARMERS Yes ☐ No ☐ Temp °C Time Minutes

Topdeck Options

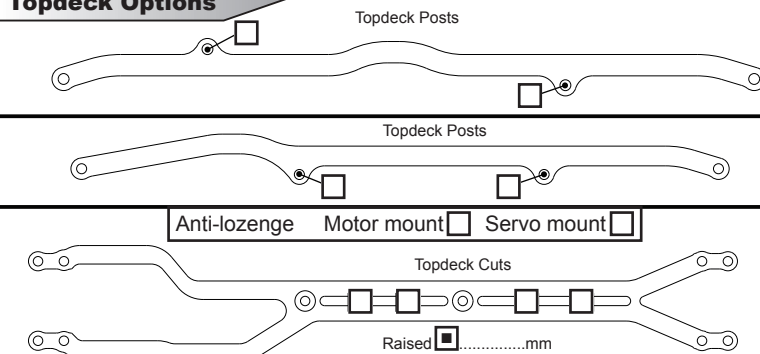

Front

Washers0.....mm

Servo Saver
 Yes ☐ No ☐

Spool ☐ Gear Diff ☐ Diff Oil cTs

Washers0.....mm
 Inside Wheel Lock25.....°
 Outside Wheel Lock°

Washers1.5.....mm

Washers0.....mm

No Dot - 1.0mm
 1 Dot - 1.1mm
 2 Dot - 1.2mm - Kit
 3 Dot - 1.3mm

Peripheral Damping
 Yes ☐ No ☐

Cap Type Vented ☐ Sealed ☐ Emulsion ☐
 Oil450.....cTs

Washers1.5.....mm

Washers0.....mm

0 Dot - Kit ☐ 2 Dot ☐
 1 Dot Front Hole ☐ 3 Dot Front Hole ☐
 1 Dot Rear Hole ☐ 3 Dot Rear Hole ☐

Front of car

Washers2.....mm

Drop5.8.....mm (on 1.6mm drop gauge spacer)

Ride Height5.2.....mm

Camber2.....°

Toe0.75.....°

Shims1.....mm

Pivot Pin Insert

0.25 In	Front ☐	Rear ☐
0.25 Out	Front ☐	Rear ☐
0.75 In	Front ☐	Rear ☐
0.75 Out	Front ☐	Rear ☐

Springxray 2.5-2.8.....

Piston1.1 x 4.....

Drilled Yes ☐ No ☐

Drilled piston Hole Size1.1.....mm

Shock Length (X)10.5.....mm

Rebound0.....%

Rear

Diff Oil10k.....cTs

No Dot - 1.0mm
 1 Dot - 1.1mm
 2 Dot - 1.2mm - Kit
 3 Dot - 1.3mm

Washers1.5.....mm

Washers1.25.....mm

Motor Screw Positions

Washers1.5.....mm

Washers1.5.....mm

Drop4.8.....mm (on 1.6mm drop gauge spacer)

Ride Height5.4.....mm

Camber2.....°

Toe2.8.....°

Shims1.....mm

Pivot Pin Insert

0.25 In	Front ☐	Rear ☐
0.25 Out	Front ☐	Rear ☐
0.75 In	Front ☐	Rear ☐
0.75 Out	Front ☐	Rear ☐

Peripheral Damping
 Yes ☐ No ☐

Cap Type Vented ☐ Sealed ☐ Emulsion ☐
 Oil450.....cTs

SpringXray 2.7.....

Piston1.1 x 4.....

Drilled Yes ☐ No ☐

Drilled piston Hole Size1.1.....mm

Shock Length (X)10.5.....mm

Rebound0.....%

Washers1.5.....mm

Washers1.5.....mm

0 Dot - Kit ☐ 2 Dot ☐
 1 Dot Front Hole ☐ 3 Dot Front Hole ☐
 1 Dot Rear Hole ☐ 3 Dot Rear Hole ☐

Front of car