

Driver Details

NAME Michal Orlowski
DATE 15-18.07.2001
EVENT / TRACK ETSrd1 Arena 33 Andernach, Germany
WEATHER DRY
RESULT A8
FASTEST LAP TIME 18.008

Chassis and Electrics

CHASSIS Mid ☐ Alloy ☐ Carbon ☐
TOP DECK Vertical ☐ Horizontal ☐
BODYSHELL Xtreme Twister 0.5mm
WING Twister std
E.S.C LRP FLOW X
SERVO PowerHD S15
RECEIVER Sanwa RX-493
LIPO LRP G4 5200mAh

Track Conditions

GRIP LEVEL High ☐ Medium ☐ Low ☐
TYPE Tight ☐ Open ☐ Mixed ☐
SURFACE Carpet ☐ Tarmac ☐
CONDITION Smooth ☐ Bumpy ☐
AIR TEMPERATURE 27 °C °F TRACK TEMPERATURE 50 °C °F
VENUE Indoor ☐ Outdoor ☐

Motor and Gearing

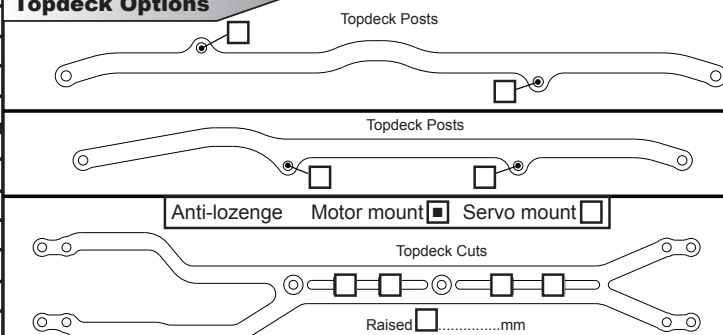
MOTOR LRP X22 5.0T
ROTOR DIAMETER 12.3
TIMING 17
GEAR PITCH 48DP ☐ 64DP ☐
SPUR SIZE 89
PINION SIZE 22

NOTES

U8159 - Pivot Ball Suspension
U8138 - Anti Lozenge Top Deck
New CORE RC springs

**Wheels, Tyres and Inserts**

WHEELS Matrix
TYRES Matrix
INSERTS Matrix
TYRE ADDITIVE MR33 v3
ADDITIVE TIME Front 15 Minutes Rear 15 Minutes
TYRE WARMERS Yes ☐ No ☐ Temp 65 °C Time 10 Minutes

Topdeck Options**Front**

 ☐ Spool ☐ Gear Diff Diff OilcTs	 Washers 0mm SERVO SAVER Yes ☐ No ☐	 Washers 0.5mm Strap Split Block	 Washers 3mm Washers 1mm No Dot - 1.0mm 1 Dot - 1.1mm 2 Dot - 1.2mm - Kit 3 Dot - 1.3mm	 53.0mm 53.5mm 54.5mm - Kit	 0 Dot - Kit 1 Dot Front Hole 1 Dot Rear Hole 2 Dot 3 Dot Front Hole 3 Dot Rear Hole
 Washers 1mm Inside Wheel Lock° Outside Wheel Lock°	 Washers 1mm Inside Wheel Lock° Outside Wheel Lock°	 Washers 1mm Droop23mm (on 1.6mm droop gauge spacer) Pivot Pin Insert Ride Height5.0mm Camber-2° Toe+1° Shims 1mm	 Washers 1mm Shims 1mm	 Peripheral Damping Yes ☐ No ☐	 Cap Type Vented ☐ Sealed ☐ Emulsion ☐ Oil350cTs SpringCORE RC 2.9 Piston2.7 Drilled Yes ☐ No ☐ Drilled piston Hole Size1.1mm Shock Length (X)11mm Rebound0%

Rear

 Diff Oil8000cTs	 Washers 0mm Washers 2mm Washers 0mm	 Motor Screw Positions Washers 0.5mm	 Washers 1mm Droop22mm (on 1.6mm droop gauge spacer) Ride Height5.2mm Camber-2° Toe3.0-3.9° Shims 1mm	 53.0mm - Kit 53.5mm 54.5mm	 0 Dot - Kit 1 Dot Front Hole 1 Dot Rear Hole 2 Dot 3 Dot Front Hole 3 Dot Rear Hole
 No Dot - 1.0mm 1 Dot - 1.1mm 2 Dot - 1.2mm - Kit 3 Dot - 1.3mm	 Washers 1mm Shims 1mm	 Washers 1mm Shims 1mm	 Peripheral Damping Yes ☐ No ☐	 Cap Type Vented ☐ Sealed ☐ Emulsion ☐ Oil350cTs SpringCORE RC 2.7 Piston4 hole Drilled Yes ☐ No ☐ Drilled piston Hole Size1.1mm Shock Length (X)11mm Rebound0%	 Front of car Rear of car