

Driver: Andy Track: Halifax Event: Halifax National
Date: 25/9/22 Qualifying: Final: Best Lap: 14.6

TRACK TYPE

Grip Level ☐ High ☒ Medium ☐ Low ☐
Type ☐ Tight ☐ Open ☒ Mixed ☐
Condition ☐ Flat ☐ Bumpy ☐ Mixed ☐
Surface ☒ Tarmac (Asphalt) ☐ Carpet ☐
Track Temp 12-17degC °C
Weather ☒ Overcast (Cloud Covered)

Notes:

TYRES

Tyres
Cleaner
Additive
Additive Time Front: 12-14 mins Rear: 12-14 mins
Heating Time Front: 12 mins Rear: 12 mins
Heating Temp Front: 78 °C Rear: 78 °C

Notes:


- 0mm under all hub carriers
- Rear steering arms (CF) mounted to underside of hub's with screw facing upwards. Ball Stud 'Passive Toe Spacer' facing downwards with 0mm spacing under it.
- Rear body height hole 7-1 dots
- Front body height hole 5-3 dots
- Alloy Eccentrics U8057
- Alloy Hubs U7812
- LW foam bumper U7866
- Alloy Radius Arms U7816

FRONT

KEY: CF = Carbon Fibre, AL = Aluminium, P = Plastic, F = Front, R = Rear
H = High, L = Low, Y = Yes, N = No, V = Vertical, H = Horizontal

Ride Height 5.2 mm
Camber 2 deg
Droop 22.8 mm
Castor 4 deg
Toe -1/side (out) deg
Anti Roll Bar 1.1 ☐ 1.2 ☐ 1.3 ☐ 1.4 ☐
Upper Link Mount 0 dot ☐ 1 dot ☐
Spool Height H ☐ L ☐
Diff Oil (if applicable) cSt
Servo Horn Height 17 mm Saver ☐
Steering Travel 20 in out

Notes: used U7787 ball +1mm for '-0.5mm' anti dive

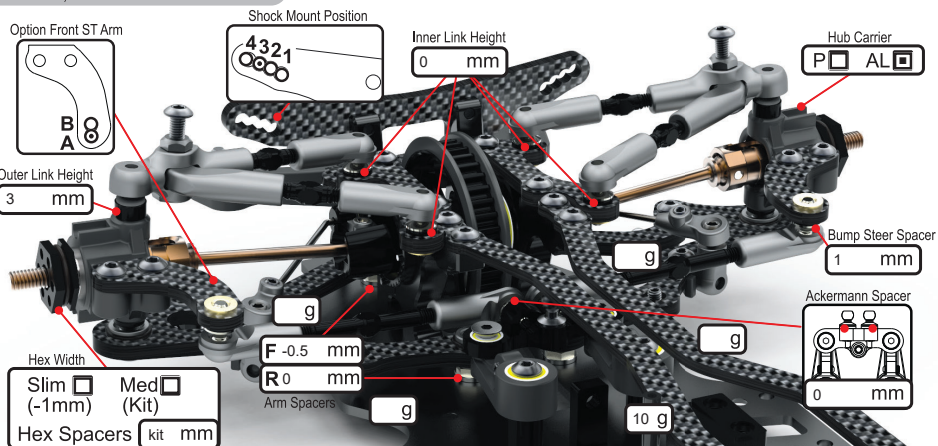


REAR

KEY: CF = Carbon Fibre, AL = Aluminium, P = Plastic, F = Front, R = Rear
H = High, L = Low, Y = Yes, N = No, V = Vertical, H = Horizontal

Ride Height 5.4 mm
Camber 2 deg
Droop 21.2 mm
Castor 4 deg
Toe 3.0-4.0 deg
Anti Roll Bar 1.1 ☐ 1.2 ☐ 1.3 ☐ 1.4 ☐
Upper Link Mount 0 dot ☐ 1 dot ☐
Diff Height H ☐ L ☐
Diff Oil 10 cSt

Notes: AM 3000

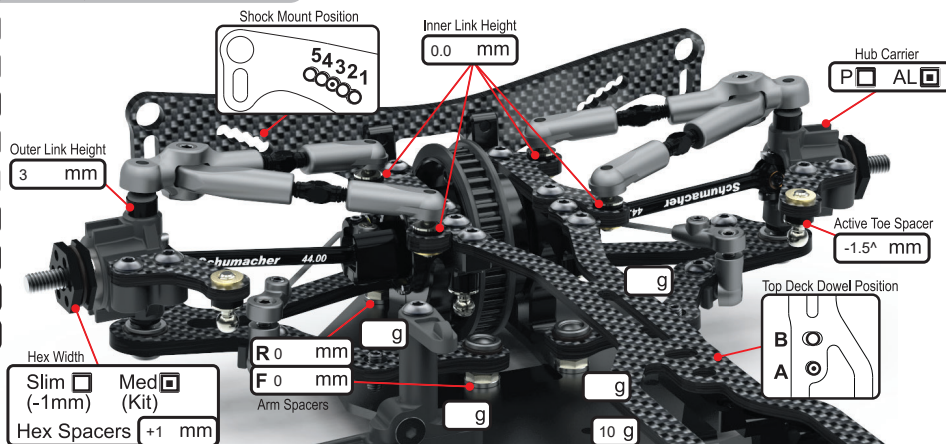

BODYSHELL

Body
Wing
Wing Height 115 mm
Front Height 6.4 mm
Body Stopper Y ☐ N ☐
Stopper Height at 4.0 mm
Body Weight 65 g
Rear Posts V ☐ H ☐
Body Offset Fwrd 62 mm
Wing Offset Rwrdr mm

Notes:

CHASSIS

Chassis AL ☐ CF ☐
Top Deck 2mm Kit ☐ 1.6mm ☐ 2 piece ☐
T Brace Y ☐ N ☐
Motor Mount Screws 1 2 3 4
Rear ☐ ☐ ☐ ☐ Front
Total Weight 1320 g
Mass Damper F ☐ ☐ cSt R ☐ ☐ cSt

Notes:

ELECTRONICS

E.S.C.
Servo
RX
LiPo
Motor 4.5t
Rotor Dia. mm
Timing deg
Gear Pitch 48 ☐ 64 ☐
Pinion t
Spur t
Ratio

SHOCKS

KEY: x = Stroke, e = external
V = Vented (Drilled), S = Sealed

	FRONT	REAR
Cap Type	V <input type="checkbox"/> S <input type="checkbox"/>	V <input type="checkbox"/> S <input type="checkbox"/>
Body	Kit <input type="checkbox"/> Kashima Coated <input type="checkbox"/>	
Oil	300 cSt	300 cSt
Piston	4 x 1.1mm kit	4 x 1.1mm kit
Spring	Core RC Grey 3.1	Core Rc Purple 2.9
Length (x)	9 mm	9 mm
Rebound	1 mm	1 mm
Limiters (e)	0 mm	0 mm

Notes: