

Driver: *Billy Fletcher* Track: _____ Event: *EWS Round 1*
Date: _____ Qualifying: *2* Final: *2* Best Lap: *14.9*

TRACK TYPE

Grip Level High ☐ Medium ☒ Low ☐
Type Tight ☒ Open ☐ Mixed ☒
Condition Flat ☒ Bumpy ☐
Surface Tarmac (Asphalt) ☐ Carpet ☒
Track Temp _____ °C
Weather _____
Notes: _____

TYRES

Tyres *Ews Rush 30*
Cleaner *MR33 V4*
Additive *MR33 V4*
Additive Time Front: _____ mins Rear: _____ mins
Heating Time Front: _____ mins Rear: _____ mins
Heating Temp Front: _____ °C Rear: _____ °C

Notes:

Double additive, 15 mins before run then again 5 mins before run. Tyres wet on track (dry any excess) Gearing track dependant Rear toe plate on bottom of hub with ball studs on top


Arm0 - PetitRC

FRONT

KEY: CF = Carbon Fibre, AL = Aluminium, P = Plastic, F = Front, R = Rear
H = High, L = Low, Y = Yes, N = No, V = Vertical, H = Horizontal

Ride Height *5* mm
Camber *2* deg
Droop *24* mm
Castor *4* deg
Toe *1 out* deg
Anti Roll Bar 1.1 ☐ 1.2 ☐ 1.3 ☒ 1.4 ☐
Upper Link Mount 0 dot ☐ 1 dot ☐
Spool Height H ☐ L ☒
Diff Oil (if applicable) _____ cSt
Servo Horn Height _____ mm Saver ☐
Steering Travel *24* in out

Notes: *No spacers under hubs*

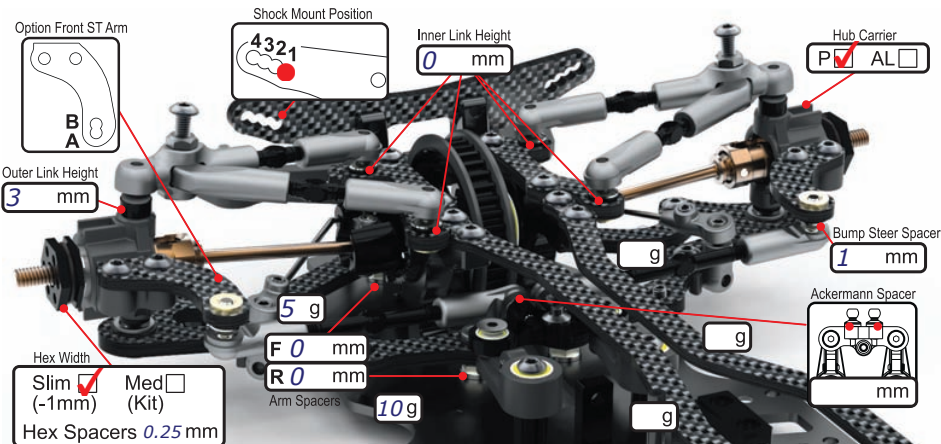


REAR

KEY: CF = Carbon Fibre, AL = Aluminium, P = Plastic, F = Front, R = Rear
H = High, L = Low, Y = Yes, N = No, V = Vertical, H = Horizontal

Ride Height *5.4* mm
Camber *2* deg
Droop *23.2* mm
Castor *4* deg
Toe *2.5* deg
Anti Roll Bar 1.1 ☐ 1.2 ☒ 1.3 ☐ 1.4 ☐
Upper Link Mount 0 dot ☐ 1 dot ☐
Diff Height H ☐ L ☒
Diff Oil *10k 2950 on AM checker* cSt

Notes:

No spacers under hubs

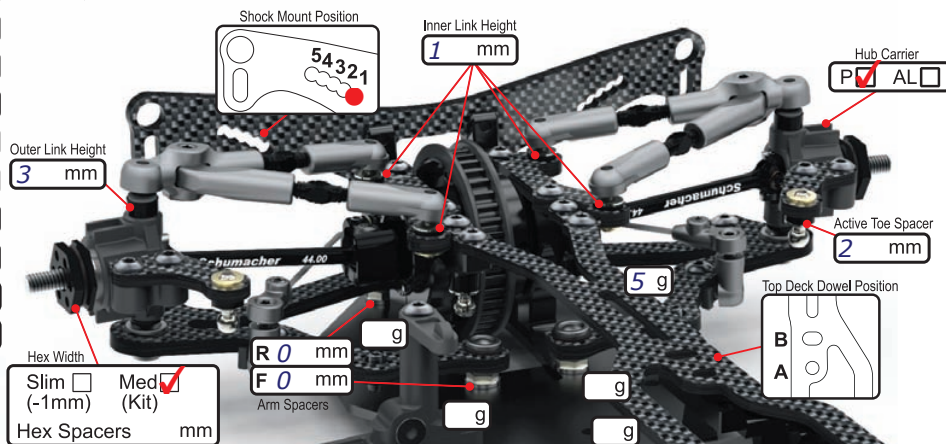

BODYSHELL

Body *Twister Speciale*
Wing *Kit wing*
Wing Height _____ mm
Front Height _____ mm
Body Stopper Y ☒ N ☐
Stopper Height _____ mm
Body Weight *66* g
Rear Posts V ☐ H ☒
Body Offset Fwrd *3* mm
Wing Offset Rwd _____ mm
Notes: _____

CHASSIS

Chassis AL ☒ CF ☐
Top Deck 2mm Kit ☐ 1.6mm ☐ 2 piece ☒
T Brace Y ☐ N ☒
Motor Mount Screws 1 2 3 4
Rear ☐ ☐ ☐ Front ☐
Total Weight _____ g
Mass Damper F ☐ _____ cSt R ☐ _____ cSt
Notes: *All motor screws in*

ELECTRONICS

E.S.C. *HW*
Servo *TEAM POWERS*
RX *Sanwa*
LiPo *Opti 6000*
Motor *Team powers V4*
Rotor Dia. _____ mm
Timing *40* deg
Gear Pitch 48 ☐ 64 ☐
Pinion *46-48* t
Spur *98* t
Ratio _____

SHOCKS

KEY: x = Stroke, e = external
V = Vented (Drilled), S = Sealed

	FRONT	REAR
Cap Type	V ☐ S ☒	V ☐ S ☒
Body	Kit ☒ Kashima Coated ☐	
Oil	<i>250</i> cSt	<i>250</i> cSt
Piston	<i>4 x 1.1</i>	<i>4 x 1.1</i>
Spring	<i>Purple</i>	<i>Purple</i>
Length (x)	<i>9</i> mm	<i>9</i> mm
Rebound	<i>1mm</i> mm	<i>1</i> mm
Limiters (e)	_____ mm	_____ mm

Notes: _____