

Driver: **Michal Orlowski** Track: **ETS Carpet** Event: **Carpet Baseline**
 Date: _____ Qualifying: _____ Final: _____ Best Lap: _____

TRACK TYPE

Grip Level ☒ High ☐ Medium ☐ Low
 Type ☐ Tight ☐ Open ☐ Mixed
 Condition ☐ Flat ☐ Bumpy ☐ Mixed
 Surface ☐ Tarmac (Asphalt) ☒ Carpet
 Track Temp _____ °C
 Weather _____

Notes:

TYRES

Tyres **Matrix ETS**
 Cleaner **MR33 V3**
 Additive **MR33 V3**
 Additive Time Front: **10** mins Rear: **10** mins
 Heating Time Front: _____ mins Rear: _____ mins
 Heating Temp Front: _____ °C Rear: _____ °C

Notes:


Outer Upper Link Height: Shorter thread ball studs must be used when less than 3mm is used. U4904 - Ball Stud Short.

FRONT

KEY: CF = Carbon Fibre, AL = Aluminium, P = Plastic, F = Front, R = Rear
 H = High, L = Low, Y = Yes, N = No, V = Vertical, H = Horizontal

Ride Height **5.0** mm
 Camber **-2.0** deg
 Droop **24.0** mm
 Castor **4.0** deg
 Toe **-1.0** deg
 Anti Roll Bar ☐ 1.1 ☐ 1.2 ☐ 1.3 ☐ 1.4
 Upper Link Mount ☐ 0 dot ☐ 1 dot
 Spool Height ☐ H ☐ L
 Diff Oil (if applicable) _____ cSt
 Servo Horn Height **17** mm Saver ☐
 Steering Travel _____ in **17** out

Notes:

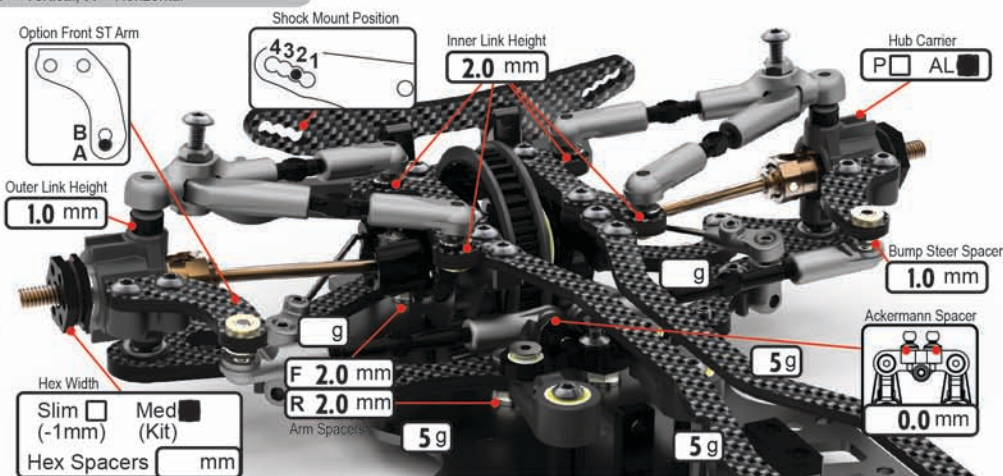


REAR

KEY: CF = Carbon Fibre, AL = Aluminium, P = Plastic, F = Front, R = Rear
 H = High, L = Low, Y = Yes, N = No, V = Vertical, H = Horizontal

Ride Height **5.2** mm
 Camber **-2.0** deg
 Droop **23.0** mm
 Castor **4.0** deg
 Toe **2.0-2.4** deg
 Anti Roll Bar ☐ 1.1 ☐ 1.2 ☐ 1.3 ☐ 1.4
 Upper Link Mount ☐ 0 dot ☐ 1 dot
 Diff Height ☐ H ☐ L
 Diff Oil **9K** cSt

Notes:

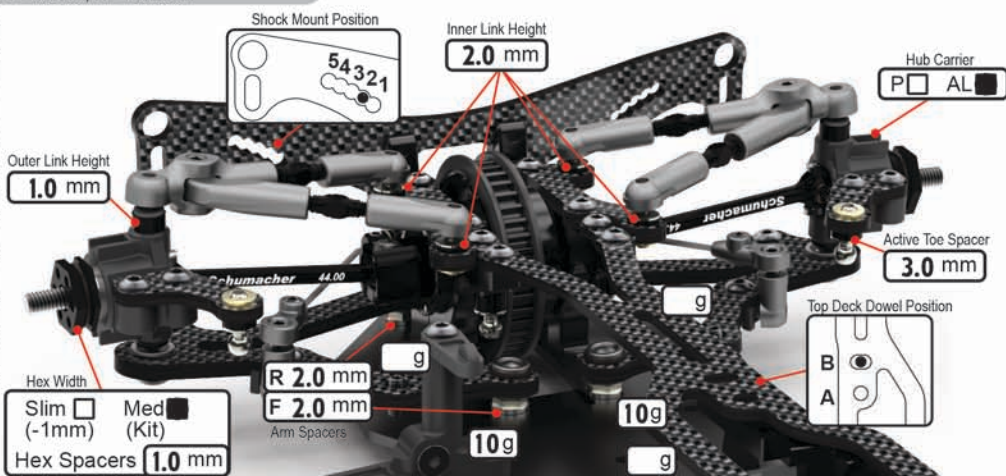

BODYSHELL

Body **Xtreme Speciale 0.5**
 Wing **Twister 0.5**
 Wing Height **114** mm
 Front Height **6.5** mm
 Body Stopper ☒ Y ☐ N
 Stopper Height **5.0** mm
 Body Weight _____ g
 Rear Posts ☐ V ☒ H
 Body Offset Fwrd **5** mm
 Wing Offset Rwrdr **0** mm

Notes:

CHASSIS

Chassis ☒ AL ☐ CF
 Top Deck 2mm Kit ☐ 1.6mm ☒ 2 piece ☐
 T Brace ☐ Y ☒ N
 Motor Mount Screws 1 2 3 4
 Rear ☐ ☐ ☐ ☐ Front
 Total Weight **1320** g
 Mass Damper
 F ☐ _____ cSt
 R ☐ _____ cSt

Notes:

ELECTRONICS

E.S.C. **LRP Flow X**
 Servo **Power HD**
 RX **Sanwa**
 LiPo **LRP Graphene 4 4000**
 Motor **LRP X22 5.0 Turn**
 Rotor Dia. **Std** mm
 Timing **-5** deg
 Gear Pitch **48** ☐ 64
 Pinion **20** t
 Spur **85** t
 Ratio **7.73**

SHOCKS

KEY: x = Stroke, e = external
 V = Vented (Drilled), S = Sealed

	FRONT	REAR
Cap Type	☒ V ☐ S	☒ V ☐ S
Body	☒ Kit ☐ Kashima Coated	
Oil	350 cSt	350 cSt
Piston	kit - 4 hole 1.1mm	kit - 4 hole 1.1mm
Spring	Core-RC Orange	Core-RC Brown
Length (x)	9.0 mm	9.0 mm
Rebound	0.0 mm	0.0 mm
Limiters (e)	0.0 mm	0.0 mm

Notes: