

Driver: Michal Orlowski Track: RClandia Event: Charity Race 2025
 Date: January 2025 Qualifying: 1st Final: 1st Best Lap: 12.1

TRACK TYPE

Grip Level High Medium Low
 Type Tight Open Mixed
 Condition Flat Bumpy Mixed
 Surface Tarmac (Asphalt) Carpet
 Track Temp °C
 Weather

Notes:

TYRES

Side Wall Glue Height Ø 57.5 mm
 Tyres Hotrace 32
 Cleaner WURTH
 Additive Hudy Red Wet on track
 Additive Time Front: 15 mins Rear: 15 mins
 Heating Time Front: mins Rear: mins
 Heating Temp Front: °C Rear: °C

Notes:


U8816
U8335
U8800
MR33 20g tunder receiver

FRONT

KEY: CF = Carbon Fibre, AL = Aluminium, P = Plastic
 F = Front, R = Rear

Ride Height 5.0 mm
 Camber 1.5 deg
 Droop 23.8 mm
 Castor 4 deg
 Toe 1 deg
 Anti Roll Bar 1.1 1.2 1.3 1.4
 Upper Link Mount 0 Notch 1 Notch
 Spool Height ↑ ↓ U8777 +0.5mm Alloy Eccentric U8729 High Trans Housing
 Servo Horn Height 17 mm Saver
 Steering Travel 25 in out

Notes:

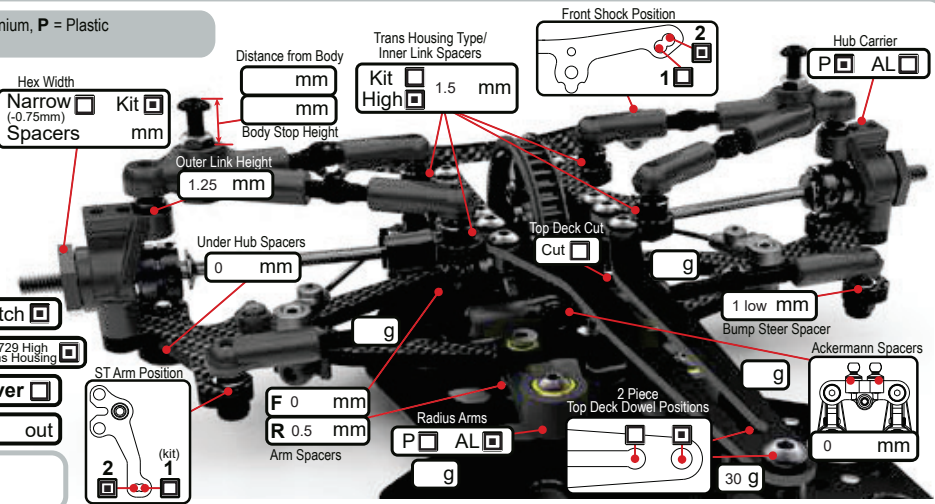


REAR

KEY: CF = Carbon Fibre, AL = Aluminium, P = Plastic
 F = Front, R = Rear

Ride Height 5.4 mm
 Camber 1.5 deg
 Droop 22.6 mm
 Castor 2.5 deg
 Toe 2.5-2.9 deg
 Anti Roll Bar 1.1 1.2 1.3 1.4
 Upper Link Mount 0 Notch 1 Notch
 Diff Height ↑ ↓ U8777 +0.5mm Alloy Eccentric U8729 High Trans Housing
 Diff Setting Diff Checker # 135 5k cSt Warming

Notes:

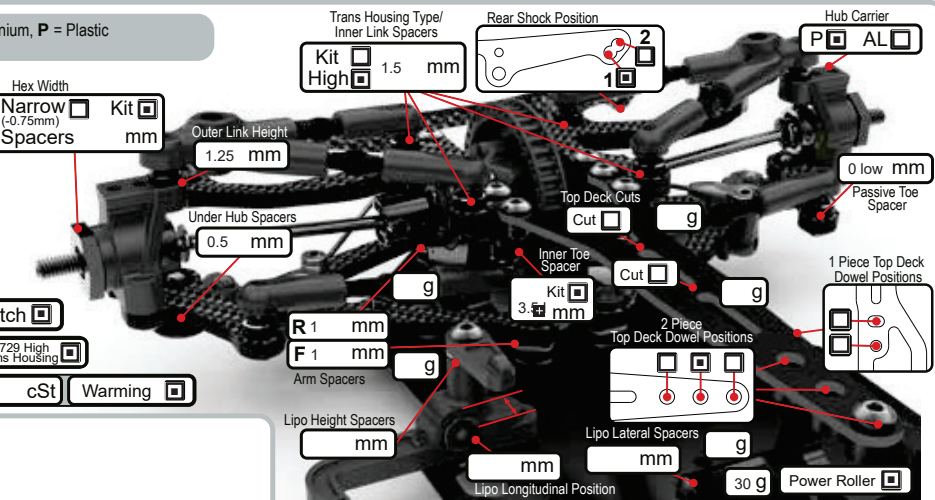

BODYSHELL

Body Speciale UL
 Wing MR33 std 0.5
 Wing Height mm
 Splitter Height 8 mm
 Body Weight g
 Body Offset Fwrd 66 mm
 Wing Offset Rwrld mm
 Wing End Plates
 Front Post 1dot 2dot 3dot Pin Hole 123456 789012
 Rear Post 1dot 2dot 3dot Pin Hole 123456 789012

Notes:

CHASSIS

Chassis AL CF
 Top Deck Options CF 1 Piece 2mm
 Front 2 Piece S2 1.6 C/F 1.6 C/F 2.0
 Rear 2 Piece S2 1.6 C/F 1.6 C/F 2.0
 T Brace PTFE Tape
 Motor Mount Screws R F
 Total Weight 1280 g
 Weight Distribution Front: : : Rear

ELECTRONICS

E.S.C. ELCERAM NITRIDE + g
 Servo S15-S
 RX Sanwa RX-492i + 20 g
 LiPo CAYOTE 3900mAh + g
 Motor 5.0 Spacers mm
 Rotor Dia. 12.3 mm
 Timing 30 deg
 Gear Pitch 48 64
 Pinion 112 t
 Spur 28 t
 Ratio

SHOCKS

KEY: x = Stroke, e = external

	FRONT	REAR
Spring	<input type="text"/> 2.4-2.7	<input type="text"/> 2.6
Oil	<input type="text"/> 400 cSt	<input type="text"/> 400 cSt
Piston	<input type="checkbox"/> Kit <input type="checkbox"/>	<input type="checkbox"/> Kit <input type="checkbox"/>
Length (x)	<input type="text"/> 8 mm	<input type="text"/> 8 mm
Rebound	<input type="text"/> 0 mm	<input type="text"/> 0 mm
Limiters (e)	<input type="text"/> mm	<input type="text"/> mm
Body	<input type="checkbox"/> Kit <input type="checkbox"/>	<input type="checkbox"/> Kashima Coated <input type="checkbox"/>

Notes: