

DRIVER AND EVENT DETAILS

Name
 Date
 Event
 Weather
 Result

CHASSIS AND ELECTRICS

Chassis
 Top Deck ☐ Flex ☐ Standard ☐ Stiff ☐
 Bodyshell
 Wing
 E.S.C.
 Servo
 Receiver
 Number of Cells ☐ 4 ☐ 5 ☐ 6 ☐
 Type of Cells

TRACK CONDITIONS

Grip Level ☒ High ☒ Medium ☐ Low ☐
 Track Type ☐ Tight ☐ Open ☐ Both ☒
 Surface ☒ Carpet ☐ Tarmac ☐ Wood ☐
 Venue ☐ Indoor ☒ Outdoor ☐
 Track Condition ☒ Smooth ☐ Bumpy ☐
 Track Temperature °C °F

MOTOR AND GEARING

Type ☐ Brushed ☒ Brushless ☒
 Motor
 Brush
 Spring
 Timing
 Gear Pitch ☐ 48Dp ☐ 64Dp ☒
 Spur Size
 Pinion Size



DRIVER NOTES

5 Cell Chassis used with Lipo battery, Drive train flipped and foam towers used front and rear.


WHEELS, TYRES AND INSERTS

Wheels
 Tyres
 Inserts
 Tyre Additive
 Additive Time MIN (R) MIN (F)
 Tyre Warmers ☐ Yes ☐ No ☐

FRONT SETTINGS



Drive ☐ Diff ☐ Spool ☒ One-Way ☐ Height ☐ High ☒ Low ☒

Servo Saver ☒ Yes ☐ No ☐
 Toe In-Out ☐ In-board ☐ Out-board ☐ ° Toe-out
 Screw Block Spacers Front mm Rear mm
 Wishbone Quik-Klips Front mm Rear mm
 Link Washers (Horizontal) mm
 Ride Height (Chassis to Floor) mm
 Droop (Chassis to Floor) mm
 Anti-roll Bar ☐ Yes ☒ No ☐ 1.20 ☐ 1.40 ☐ 1.60 ☐
 Castor ☐ 0° ☐ 2° ☐ 4° ☒ 6° ☐
 Camber ☐ Positive ☐ Negative ☒ 2 Deg
 Link Washers (Vertical) mm
 Inboard Pin ☐ Kick-up ☐ Anti-dive ☐ Horizontal ☒
 Pivot Block Spacers Front mm Rear mm

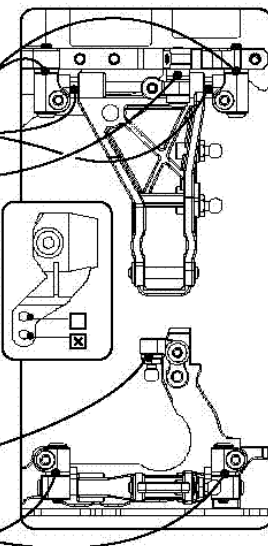


Front Shocks

Oil WT
 Springs
 Piston Holes ☐ 2 ☒ 3 ☐
 length
 Rebound %




Centre Track Rod

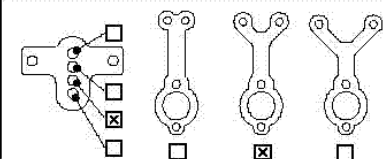

REAR SETTINGS


Drive Height ☐ High ☐ Low ☒

Toe In ☐ In-board ☒ 1.5 ° ☐ Out-board ☒ 1 ° ☐ 2.5 °
 Screw Block Spacers Front mm Rear mm
 Wishbone Quik-Klips Front mm Rear mm
 Link Washers (Horizontal) mm
 Ride Height (Chassis to Floor) mm
 Droop (Chassis to Floor) mm
 Anti-roll Bar ☐ Yes ☒ No ☐ 1.20 ☐ 1.40 ☐ 1.60 ☐
 Camber ☐ Positive ☐ Negative ☒ 2 Deg
 Link Washers (Vertical) mm
 Inboard Pin ☐ Pro-Squat ☐ Anti-Squat ☒ Horizontal ☐
 Pivot Block Spacers Front mm Rear mm

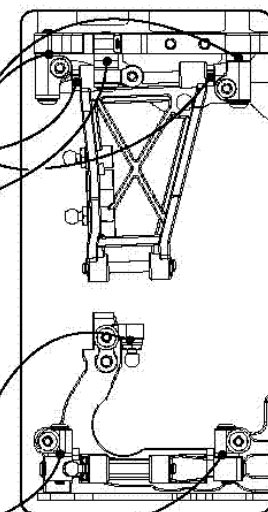

Rear Shocks

Oil WT
 Springs
 Piston Holes ☐ 2 ☒ 3 ☐
 length
 Rebound %



Driver Notes

1 Deg Alum rear hubs used...Wide rear hex.

