

DRIVER AND EVENT DETAILS

Name **C. Goetz**
 Date **1/15 - 1/17 2010**
 Event **2010 Gran Prix (NEGS-3)**
 Weather **Irrelevant**
 Result **Good**

CHASSIS AND ELECTRICS

Chassis **Kit Std.**
 Top Deck **Kit Std.**
 Bodysell **PF LTC-RLW**
 Wing **Std. (LW)**
 E.S.C **SP - LPF (101231)**
 Servo **Futaba 9551**
 Receiver **2.4**
 Number of Cells **4** ☐ **5** ☐ **6** ☐
 Type of Cells **5K Lipo**

TRACK CONDITIONS

Grip Level **High** ☐ **Medium** ☒ **Low** ☐
 Type **Tight** ☒ **Open** ☐ **Both** ☐
 Surface **Carpet** ☒ **Tarmac** ☐ **Wood** ☐
 Condition **Smooth** ☒ **Bumpy** ☐
 Temperature **°C** **°F**
 Venue **Indoor** ☒ **Outdoor** ☐

MOTOR AND GEARING

Type **Brushed** ☐ **Brushless** ☒
 Motor **SP - 13.5v3**
 Brush
 Spring
 Timing **18.75° x 9DRRS**
 Gear Pitch **48Dp** ☐ **64Dp** ☒
 Spur Size **106**
 Pinion Size **41**



WHEELS, TYRES AND INSERTS


Wheels **Jaco Blue - Premount**
 Tyres
 Inserts
 Tyre Additive
 Additive Time **14 MIN (R)** **10 MIN (F)**
 Tyre Warmers **Yes** ☐ **No** ☒

DRIVER NOTES

Vented shock caps
 <5.00ft (dia) turning circles
 (R/C = - 1.0)

Front Shocks

Oil **44 WT**
 Springs **15.5# (X)**
 Piston Holes **2** ☐ **3** ☒
 length
 Rebound **100 %**

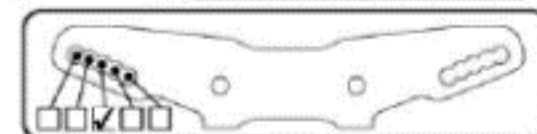


Centre Track Rod

Washers **3.0 mm**

Link Mount



1 Groove ☐
 2 Groove ☐
 3 Groove ☒



FRONT SETTINGS

Drive **Diff** ☐ **Spool** ☒ **One-Way** ☐ **Height** **High** ☐ **Low** ☒



Servo Saver **Yes** ☒ **No** ☐
 Pivot Blocks **Moulded (std)** ☒ **Alloy** ☐
 Screw Block Spacers **Front 3.0 mm** **Rear 3.0 mm**
 Wishbone Quik-Klips **Front 3.0 mm** **Rear 1.0 mm**
 Toe In-Out **In-board** ☐ **Out-board** ☐ **0.5°**
 Ride Height (Chassis to Floor) **5.0 mm**
 Droop **2.0 mm over r/h mm**
 Anti-roll Bar **No** ☒ **1.20** ☐ **1.40** ☐ **1.60** ☐
 Castor **0°** ☐ **2°** ☐ **4°** ☒ **6°** ☐
 Camber **Positive** ☐ **Negative** ☒ **1.75 Deg**
 Link Washers **-1.0 mm**
 Inboard Pin **Kick-up** ☐ **Anti-dive** ☐ **Horizontal** ☒
 Pivot Block Spacers **Front mm** **Rear mm**

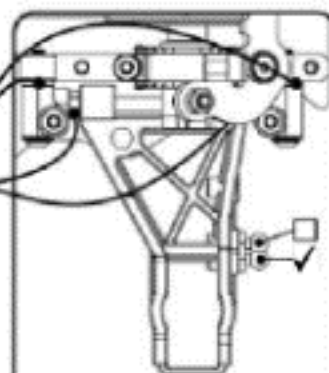

REAR SETTINGS


Drive Height **High** ☐ **Low** ☒

Pivot Blocks **Moulded (std)** ☒ **Alloy** ☐
 Screw Block Spacers **Front 2.5 mm** **Rear 3.0 mm**
 Wishbone Quik-Klips **Front 42.0 mm** **Rear 0.0 mm**
 Toe In **In-board** ☒ **Out-board** ☐ **3.0°**
 Ride Height (Chassis to Floor) **5.0 mm**
 Droop **2.0 mm above r/h mm**
 Anti-roll Bar **No** ☒ **1.20** ☐ **1.40** ☐ **1.60** ☐
 Camber **Positive** ☐ **Negative** ☒ **2.0 Deg**
 Link Washers **0.0 mm**
 Inboard Pin **Pro-Squat** ☐ **Anti-Squat** ☐ **Horizontal** ☒
 Pivot Block Spacers **Front mm** **Rear mm**

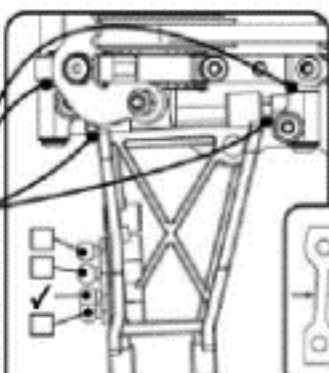


Link Mount

1 Groove ☒
 2 Groove ☐
 3 Groove ☐



1.4mm ☐
 2.4mm ☒
 3.4mm ☐
 4.4mm ☐

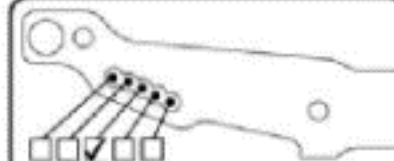

Rear Shocks

Oil **30 WT**
 Springs **13.8# (X)**
 Piston Holes **2** ☐ **3** ☒
 length
 Rebound **100 %**

