

DRIVER AND EVENT DETAILS

Name

Date

Event

Weather

Result

CHASSIS AND ELECTRICS

Chassis

Top Deck

Bodyshell

Wing

E.S.C

Servo

Receiver

Number of Cells ☐ 4 ☐ 5 ☐ 6

Type of Cells

TRACK CONDITIONS

Grip Level ☐ High ☐ Medium ☐ Low

Type ☐ Tight ☐ Open ☐ Both

Surface ☐ Carpet ☐ Tarmac ☐ Wood

Condition ☐ Smooth ☐ Bumpy

Temperature °C °F

Venue ☐ Indoor ☐ Outdoor

MOTOR AND GEARING

Type ☐ Brushed ☐ Brushless

Motor

Brush

Spring

Timing

Gear Pitch ☐ 48Dp ☐ 64Dp

Spur Size

Pinion Size

Am0 [at] PetitRC.com



WHEELS, TYRES AND INSERTS

Wheels

Tyres

Inserts

Tyre Additive

Additive Time MIN (R) MIN (F)

Tyre Warmers ☐ Yes ☐ No

DRIVER NOTES

Front Shocks

Oil WT

Springs

Piston Holes ☐ 2 ☐ 3

length

Rebound %

FRONT SETTINGS

Drive ☐ Diff ☐ Spool ☐ One-Way ☐ Height ☐ High ☐ Low

Servo Saver ☐ Yes ☐ No

Pivot Blocks ☐ Moulded (std) ☐ Alloy

Screw Block Spacers Front mm Rear mm

Wishbone Quik-Klips Front mm Rear mm

Toe In-Out ☐ In-board ☐ Out-board °

Ride Height (Chassis to Floor) mm

Droop mm

Anti-roll Bar ☐ No ☐ 1.20 ☐ 1.40 ☐ 1.60




Castor ☐ 0° ☐ 2° ☐ 4° ☐ 6°

Camber ☐ Positive ☐ Negative Deg

Link Washers mm

Inboard Pin ☐ Kick-up ☐ Anti-dive ☐ Horizontal

Pivot Block Spacers Front mm Rear mm

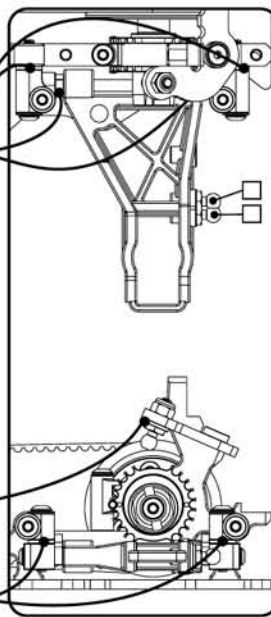


Centre Track Rod

Washers mm

Link Mount

☐ 1 Groove
☐ 2 Groove
☐ 3 Groove



REAR SETTINGS

Drive Height ☐ High ☐ Low

Pivot Blocks ☐ Moulded (std) ☐ Alloy

Screw Block Spacers Front mm Rear mm

Wishbone Quik-Klips Front mm Rear mm

Toe In ☐ In-board ☐ Out-board °

Ride Height (Chassis to Floor) mm

Droop mm


Anti-roll Bar ☐ No ☐ 1.20 ☐ 1.40 ☐ 1.60

Camber ☐ Positive ☐ Negative Deg

Link Washers mm


Inboard Pin ☐ Pro-Squat ☐ Anti-Squat ☐ Horizontal

Pivot Block Spacers Front mm Rear mm

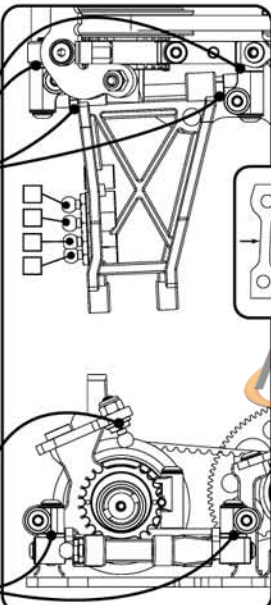


Link Mount

☐ 1 Groove
☐ 2 Groove
☐ 3 Groove



☐ 1.4mm
☐ 2.4mm
☐ 3.4mm
☐ 4.4mm



Petit RC .com

Rear Shocks

Oil WT

Springs

Piston Holes ☐ 2 ☐ 3

length

Rebound %