

Setup Sheet

Driver Details

Name **Test Driver**

Date **March 2012**

Surface

Carpet ☒ Tarmac ☐ Wood ☐ Mixed ☐

Circuit ☐ Oval ☒ Smooth ☐ Bumpy ☐

Wheels and Tyres

Front Left Foam **50 S**

Front Left Dia. **52 mm**

Front Left Additive ☐

Glue Dots ☐

Rear Left Foam **35 S**

Rear Left Dia. **52 mm**

Rear Left Additive ☐

Front Right Foam **50 S**

Front Right Dia. **52 mm**

Front Right Additive ☐

Glue Dots ☐

Rear Right Foam **35 S**

Rear Right Dia. **52 mm**

Rear Right Additive ☐

Batteries

4 Cell ☐ 1S ☐ Shorty ☐

6 Cell ☒ 2S Saddle ☐

Motor and Gearing

Motor **G2**

Spur **46**

Pinion **12**

Temperature

18 °C

Chassis and Electrics

4 Cell ☐ 6 Cell ☒

Bodyshell **Kamtec Escort**

Wing **None**

E.S.C **G28**

Servo **G4807**

Receiver **2.4G FHSS (Core)**

Front

Camber Plate **1°** ☒ **2°** ☐

Front Toe In **0°**

5lb/in White ☐


7lb/in Yellow ☐

10lb/in Blue ☐

14lb/in Green ☐

19lb/in Red ☒

26lb/in Black ☐

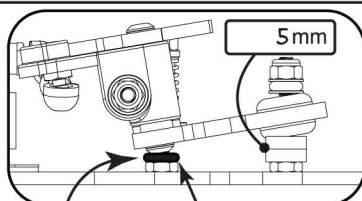

None ☐
White ☐
Blue ☒
Red ☐
Black ☐

No. of O-rings **0** ☐ **1** ☒ **2** ☐

Front Ride Height **4 mm**

Centre

None ☐
White ☐
Blue ☐
Red ☒
Black ☐

None ☐
White ☐
Blue ☐
Red ☒
Black ☐

Top Link

Moulded Yes ☒ No ☐

Link Length **mm**

None ☐
White ☐
Blue ☐
Red ☒
Black ☐

Lower Link Right

Moulded Yes ☒ No ☐

Link Length **mm**

Lower Link Left

Moulded Yes ☒ No ☐

Link Length **mm**

None ☐
White ☐
Blue ☐
Red ☒
Black ☐

Rear

Motor Spacer ☐

5lb/in White ☒


7lb/in Yellow ☐

10lb/in Blue ☐

14lb/in Green ☐

19lb/in Red ☐

26lb/in Black ☐



White ☐
Blue ☒
Red ☐
Black ☐

No. of O-rings **0** ☐ **1** ☒ **2** ☐

Rear Ride Height **4 mm**