

DRIVER :

MEETING:

TRACK :


DATE:

TRACK CONDITIONS:


FRONT /AVANT /DELANTRA /VORN /FRAM /AVANTRENO

FRONT CAMBER; 0° -1° -2° -3°



FRONT TOE-IN;
-1° -2° -3° 0° +1° +2° +3°



SHOCK POSITION; 2 1




ANTI ROLL BAR; 2 1 No

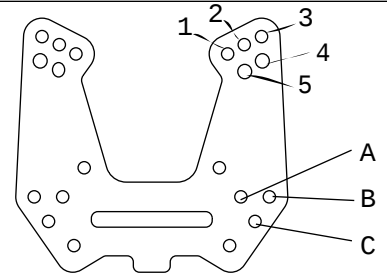

FRONT RIDE HEIGHTmm...
FRONT CASTER 25 30 35 deg

SHOCK OIL 10W 15W 20W 25W 30W 35W 40W 45W 50W 55W 60W 70W 80W

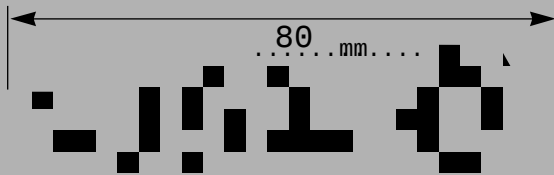

SPACER 5 mm

VARI /SOLID PISTON

HOLES IN PISTON

1 2 3 4

SPRING

WHITE

YELLOW

RED

GREY


BLUE

BLACK

REAR /ARRIERE /TRASERA /HINTEN /BAK /RETROTRENO

REAR CAMBER

0°
-1°
-2°
-3°



ANTI ROLL BAR.....YES..NO.



ANTI SQUAT.....0°..1.5°..3°...

INBOARD TOE-IN.....0°..3°..

OUTBOARD TOE-IN....0°..1°..2° 3° 4°

REAR RIDE HEIGHTmm

SHOCK POSITION; 3 2 1

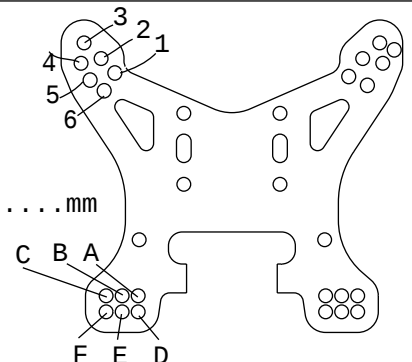

OIL 10W 15W 20W 25W 30W 35W 40W 45W 50W 55W 60W 70W 80W



SPACER 10 mm

VARI /SOLID PISTON

HOLES OPEN IN PISTON

1 2 3 4

SPRING

WHITE

YELLOW

RED

GREY

BLUE

BLACK

Asso Silver

PINION 15T 16T 17T
18T 19T 20T
21T 22T 23T
24T 25T 26T
27T 28T 29T
SPUR GEAR; 83T 86T 89T 92T 95T

CHASSIS

C/F

C/C

TRANSMISSION

NON SLIPPER

Y N

SLIPPER CLUTCH

Y N

VISCODRIVE

Y N

WHEELBASE

FRONT OF CAR

SHORT MEDIUM LONG

TYRES : FRONT

REAR

FOAM INSERTS

YES

NO

.....

MOTOR

SPEEDO

CELLS

RECEIVER

SERVO

Sanwa