

SET-UP SHEET

DRIVER **Moi même**

RACE

TRACK **Secret spot**

NAME

CITY/COUNTRY **Bourg de Péage**

DATE

TEMPERATURE	AIR 0	TRACK 0
QUALIFYING POSITION	BEST LAPTIME	FINAL POSITION
TRACK CONDITION	SEC	RACE LENGTH MIN
☒ TECHNICAL	☒ CARPET	☐ ASPHALT
☐ LOW	☒ MEDIUM	☐ FAST
TRACTION	☒ MEDIUM	☐ HIGH

FRONT	REAR
TRANSMISSION CST	
GEAR DIFF	GEAR DIFF
☐ CST	☒ LRP 1K
☐ ONE WAY	☐ SOLID
☒ SPOOL	

FRONT BALL DIFF	REAR BALL DIFF
☐ LOOSE ☐ MEDIUM ☐ TIGHT	☐ LOOSE ☐ MEDIUM ☐ TIGHT

PINION 40 T	SPUR GEAR 100 T
FINAL DRIVE RATIO 2.00	ROLLOUT mm
MOTOR XSV	TIMING 50°
ROTOR Grey	ARMATURE 10.5
ESC HW v3.1	BATTERIES 6000 mah

BRUSHLESS	PROGRAM	PUNCH	INITIAL BRAKE	AUTO BRAKE
BODY	WING			

FRONT SHOCK ABSORBERS	REAR SHOCK ABSORBERS
OIL 450 CST SPRING Pink	OIL 450 CST SPRING Blue

THICKNESS 1,4 mm	ANTI-ROLL BAR	THICKNESS 1,4 mm
-------------------------	---------------	-------------------------


TIRES	THICKNESS 64 mm
DIAMETER	THICKNESS 64 mm
INSERTS	
ADDITIVE	

WEIGHT: TOTAL	g
---------------	---

REMARKS Editable by Arn0 at PetitRC.com

- Yokomo springs

FRONT

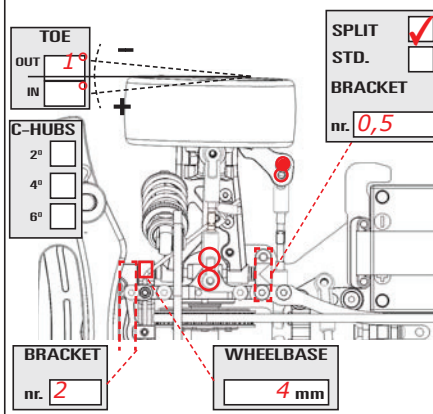

REAR

