

DRIVER, TRACK AND RESULTS

DRIVER ESTEVE GREGORY **COUNTRY** FRANCE **WEATHER** AIR TEMP 15° TRACK TEMP 15° ☐ DRY ☐ INTERMEDIATE ☐ WET
TRACK AMO MONTPELLIER **SURFACE** ☒ ASPHALT ☐ CARPET **TRACTION** ☐ LOW ☒ MEDIUM ☐ HIGH **COMMENTS**
RACE Open Ligue 13 **DATE** 02 / 04 / 17 **QUALY POS.** 2 **QUALY TIME** 14t 5:12:58 **STARTING POS.** 2 **FINAL POS.** 1

FRONT	DRIVE TRAIN	REAR
<input type="checkbox"/> GEAR DIFF	<input checked="" type="checkbox"/> GEAR DIFF	
cst	4000	cst
<input checked="" type="checkbox"/> SPOOL		

FLEX CONFIGURATION		
CHASSIS	STIFFENERS	TOP DECK
<input type="checkbox"/> STD <input checked="" type="checkbox"/> FLEX	<input checked="" type="checkbox"/> FRONT <input checked="" type="checkbox"/> REAR	<input type="checkbox"/> NONE <input checked="" type="checkbox"/> 2 mm

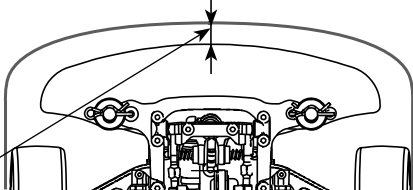
FRONT	HEAVE DAMPER	REAR
OIL 3000	OIL 2000	
SPRINGS 5.5	SPRINGS 5.5	
<input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>	
N HOLES ∅ mm	N HOLES ∅ mm	

FRONT	ROLL DAMPER	REAR
OIL 2000	OIL 2000	
SPRINGS 8.4	SPRINGS 8.4	
<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	
N HOLES ∅ mm	N HOLES ∅ mm	

FRONT	TYRES	REAR
VOLANTE 36	Controlled Tyre <input type="checkbox"/>	VOLANTE 36
MAKE AND TYPE		
INSERTS		
MR33 + Mighty Red	ADDITIVE	MR33 + Mighty Red
20' + 10' à 55°	ADDITIVE TIMING	20' + 10' à 55°

ELECTRONICS	
BATTERY	
BRAND EZ ERUN	CAPACITY 6600 mAh
MOTOR	
BRAND PRT	TYPE 13.5
TIMING 50	
ESC	
BRAND Hobbywing	TYPE Xérun XR10 Pro stock

RATIO CONFIGURATION	
100	PITCH SPUR GEAR TEETH
38	PITCH PINION TEETH
FINAL DRIVE RATIO 5.26	ROLL OUT mm

AERODYNAMIC CONFIGURATION	
BODY BRAND BITTY DESIGN	
BODY TYPE NARDO	
BODY POSITION 10 mm	

REMARKS
Car really good, easy.

FRONT	REAR
PULLROD LENGTH 15.5 mm	PULLROD LENGTH 15.5 mm
WHEEL HEX -0.75 mm	WHEEL HEX -0.75 mm
ROLL CENTER SHIMS 3 mm	ROLL CENTER SHIMS 3 mm
DOWN STOP 2.5 mm	DOWN STOP 2.0 mm

FRONT	REAR
UPPER ARM INSERT	UPPER ARM INSERT
FRONT CAMBER R 0° L 0°	REAR CAMBER R -2° L -2°
RIDE HEIGHT WITH TYRE ∅ 5.0 mm	RIDE HEIGHT WITH TYRE ∅ 5.5 mm

FRONT	REAR
CASTER 4 mm	SPACERS 7 mm
FRONT TOE -0.5°	REAR TOE 2.5°
OUTER ACKERMANN	INNER ACKERMANN
REAR REACTIVE SYSTEM	
SHIMS 0 mm	
SHIMS 2 mm	

FRONT	REAR
WHEEL BASE 0 1 <input checked="" type="checkbox"/> 2 3 4	WHEEL BASE 0 1 <input checked="" type="checkbox"/> 2 3 4
SHIMS 2 mm	
ROLL CENTER BOTTOM INSERTS MID LOW MID HIGH HIGH	ROLL CENTER BOTTOM INSERTS MID LOW MID HIGH HIGH

WEIGHT DISTRIBUTION	
CAR WEIGHT	grams
BATTERY POS. <input type="checkbox"/> FR <input type="checkbox"/> MID <input checked="" type="checkbox"/> RR	
TRACK WIDTH 188 mm	TRACK WIDTH 188 mm