

Notes:

Ride high on new spec tyres 62/64 mm

Shocks: Kyosho

AWS Chassis with 2 wight + 10g, front position

15 g. on the front bumper

effective down travel: front 3,0mm / rear 5,0 mm

Clutch Spring: Serpent SER 909520



Name: Bernd Rausch

Date: 25. - 28.05.2023

Event: ENS

Track: Ettlingen Temp: _____


Air temp: _____

Traction: Medium

Best lap: 14,864

Engine: OS T1204 W.C. Pipe: TT01 W.C. elox. (2692)

Manifold: MT04 W.C. elox. Glowplug: OS RP6 Fuel: Energy Spec

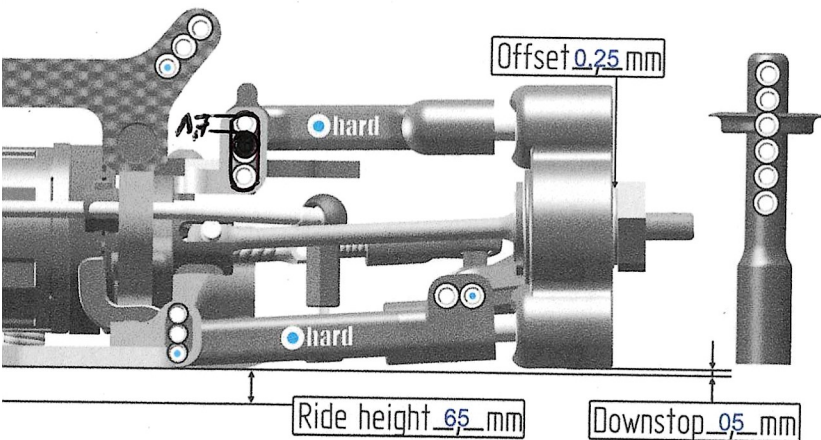


Camber left 18°

Camber right 18°

One-way ☐ Diff. oil: 2,0 MK cSt

Solid axle ☐ Toe in/out 10°

Width 198,0 mm

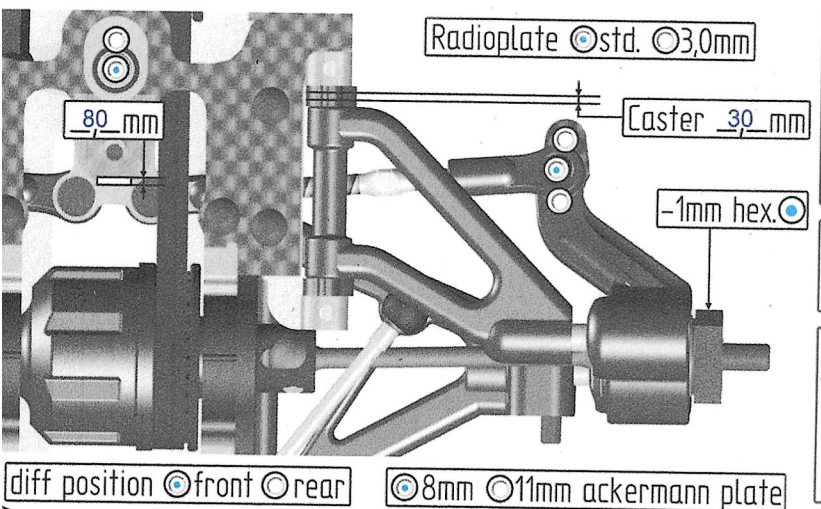

FRONT		REAR	
left	right	left	right
Matrix		Matrix	
35	35	37	37
Shore		Shore	
62	62	64	64
Diameter		Diameter	


Shocks:		
Sepent blue	Spring	X-Ray 5.0
1000	Oil	1200
3x1,2	Piston	3x1,2
F.p. spring		

Anti-roll bars:	
Front <u>25 mm</u>	Rear <u>18 mm</u>

Clutch:	
Type:	Standard
Shoe:	yellow
Preload:	0.72 mm
Gap:	0.50 mm

1st	Gear ratio:	2nd
<u>16 / 59</u>		<u>21 / 53</u>

Body:	Xreme CZ1
Wing:	Xtreme-optional, high
Winglets:	☒
Distance to bumper	____ mm
Bumper type:	standard ☐ wide ☒

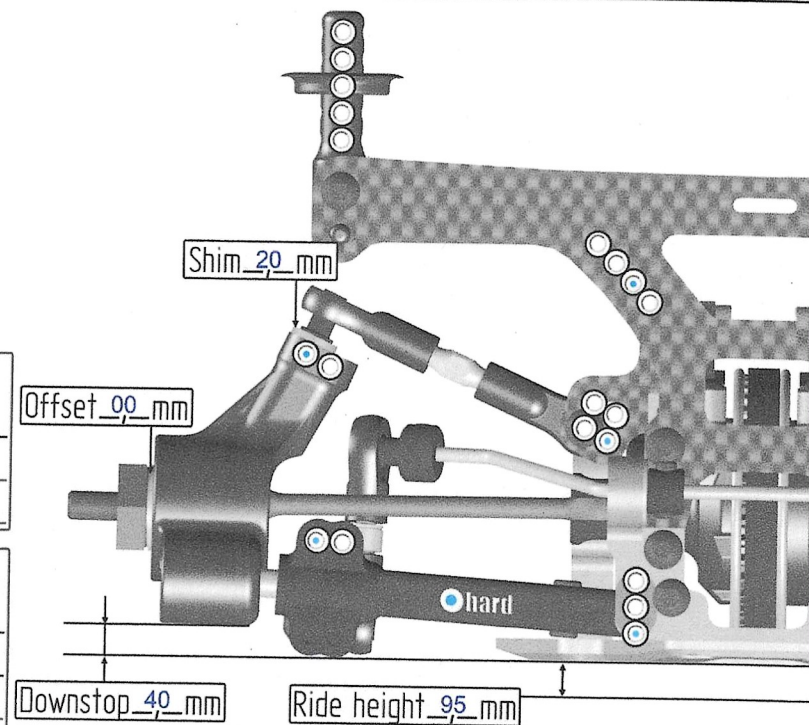

Camber left 32°

Camber right 30°

Diff. oil: 80 K cSt

Toe in/out 35°

Width 200,0 mm

