


SETUP SHEET

TRACK CONDITIONS

- TYPE ☐ Carpet ☐ Asphalt
- PLACE ☐ Indoor ☐ Outdoor
- SURFACE ☐ Smooth ☐ Med. ☐ Bumpy
- NOTE _____
- SIZE ☐ Open ☐ Med. ☐ Tight
- TRACTION ☐ High ☐ Med. ☐ Low
- TRACK TEMP/AIR TEMP _____° / _____°

FRONT SUSPENSION

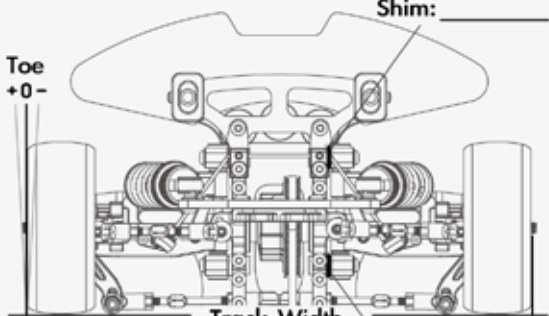

Shim: _____

Track Width _____ mm

Toe +0- _____

Toe Angle _____ °

Caster _____ °

Camber _____ °

Shim: _____

Ride Height _____ mm

Down Stop _____ mm

Anti-Roll Bar _____ mm

Gear Diff. _____ wt

Shim: _____


Shim: _____

Shim: _____

Shim: _____

Diff. ☐ High ☐ Low

REAR SUSPENSION

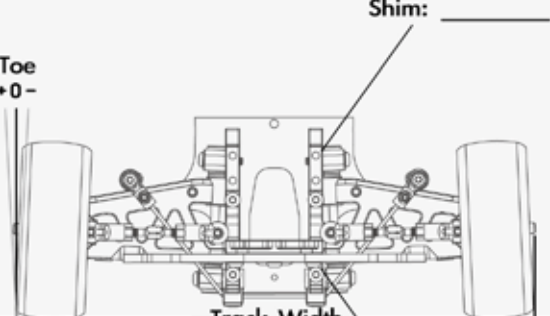

Shim: _____

Track Width _____ mm

Toe +0- _____

Toe Angle _____ °

Camber _____ °

Ride Height _____ mm

Down Stop _____ mm

Anti-Roll Bar _____ mm

Shim: _____

Shim: _____

Shim: _____

Shim: _____

Shim: _____

Shim: _____

SHOCKS



Hole Size: F: _____ R: _____

Hole In Piston: F: _____ R: _____

Shock Oil WT: F: _____ R: _____

Shock Springs: F: _____ R: _____

Shock Rebound: F: _____ R: _____

Bladder Note: _____

Thread Length: F: _____ R: _____

Shock Length: F: _____ R: _____

BODY

Body: _____

Wing Height: _____

Wing Position: _____

Body Position: _____



ELECTRONICS

Transmitter: _____

Servo: _____

Battery: _____

Note: _____

MOTOR

Brand: _____

Turns: _____

Timing: _____

Note: _____

ESC

Punch: _____

Initial Brake: _____

Drag Brake: _____

ESC Timing: _____

Turbo Timing: _____

TIRES & DRIVE RATIO

Insert: _____

Wheel: _____

Shore/deg: _____

Compound: _____

Tire Temp.: _____

Tire Additive: _____

FL FR RL RR

Drive Ratio: _____

Spur T X 1.9

Pinion T