

SETUP SHEET




TRACK CONDITIONS

Type : ☒ Carpet ☐ Asphalt
 Place : ☒ Indoor ☐ Outdoor
 Surface : ☒ Smooth ☐ Med. ☐ Bumpy
 Size: ☐ Open ☐ Med. ☐ Tight
 Traction: ☐ High ☐ Med. ☐ Low
 Track Temp/Air Temp: _____ / _____
 Note: _____



FRONT SUSPENSION

Track Width: _____ mm ☒ Gear Diff _____ wt
 Toe Angle: +0,5 ° ☐ Spool
 Caster: 4 °
 Camber: 1,75 °
 Ride Height: 5 mm Anti-Roll Bar: Ø 1,3 mm
 Down Stop: 5,6 mm

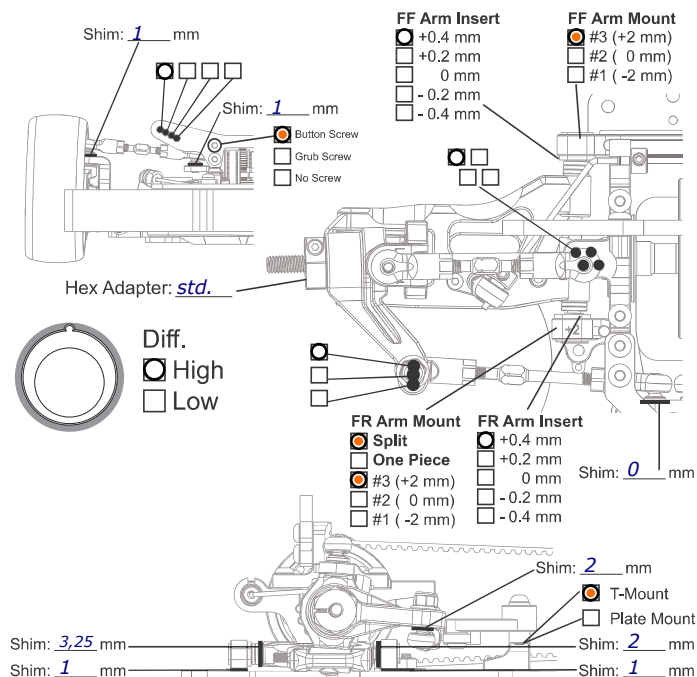

REAR SUSPENSION

Track Width: _____ mm Gear Diff 5000 wt
 Toe Angle: _____ °
 Camber: 2 °
 Ride Height: 5,2 mm
 Down Stop: 4,4 mm Anti-Roll Bar: Ø 1,2 mm

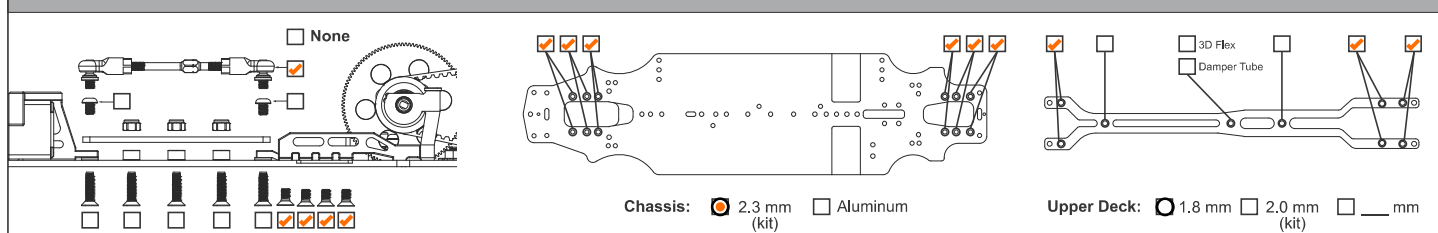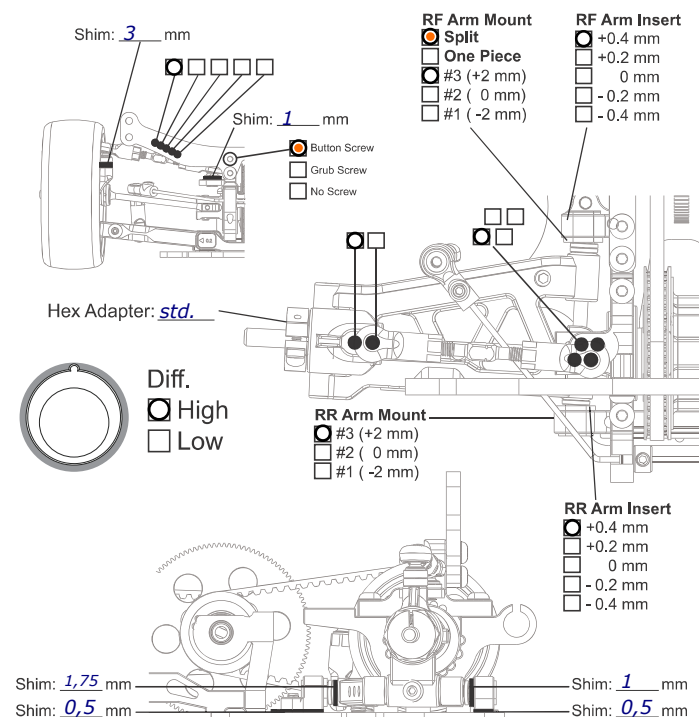

ELECTRONICS

Servo: Highest
 ESC: Muchmore ETS
 Battery: Gensace

MOTOR

Brand: MM
 Turns: 13,5 T
 Timing: fix

ESC


Punch: 12
 Initial Brake: 0
 Drag Brake: 0
☐ ESC Timing ☐ Turbo Timing

DRIVE RATIO

Spur 100 T
 Pinion 30 T $\times 1.9 =$ 6.333


TIRES

Insert: Volante
 Wheel: _____
 Shore/deg: 28
 Compound: 2017 10K
 Tire Temp: _____
 Tire additive: cs/MR22 2x
 Treated Area



SHOCKS

Hole Size: F 1,2 R _____
 Holes In Piston: F 4 R _____
 Shock Oil WT: F 500 R _____
 Shock Springs: F L2,7 R L2,7
 Shock Rebound: F 50 R 50
 Bladder Note: _____
 Thread Length: F _____ R _____
 Shock Length: F _____ R _____



BODY

Body Position: +4
 Body: Bitty M410
 Wing Height: -1
 Wing Position: +2

